



# Titan™ Single Coffee Brewer and Server



Titan Single Brewer

*High-volume brewing solution featuring simple operation, precise extraction control and portable servers*

- Brews up to 85 litres of perfect coffee per hour.
- Coffee extraction controlled with pre-infusion and pulse brew; variable by-pass controls coffee strength.
- BrewMETER® allows automatic programming of pulse routine. 
- Funnel has 750 gram capacity and paper filter retainers to eliminate fold-over.
- Left or right faucet for hot water.
- Display in English, Spanish, or Katakana
- Large sprayhead.
- Energy Saver Mode. 
- Digital temperature control.

## TITAN TF SERVER

- 12 litre capacity
- ThermoFresh® servers are insulated to keep coffee hot for hours.
- Large cup clearance allows for dispensing into cups, decanters and thermal carafes.
- Brew-through lid.
- Integrated sight gauge assembly allows for easy cleaning.
- Innovative fast flow faucet design.

## RELATED PRODUCTS

### Titan/Urn Filter Pack

Product No.: 20111.0000



### Titan Funnel

Product No.: 40105.0000



### EQHP-54

Product No.: 39000.0006



### EQHP-54L

Product No.: 39000.0003



### Inlet Hose Assembly


Product No.: 32865.0002




### Flavour Label

Product No.: 41745.1000

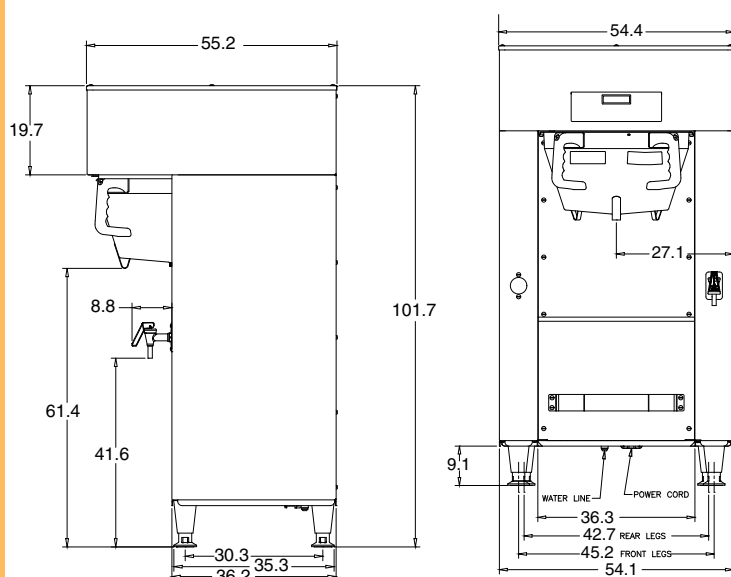

Titan TF Server



Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agencies
39300.0002	Titan Single	48.5 kg	230/400 230	16 32.0	11125 7360	50/60	3 1	No	 
39400.0001	Titan Server	5.4 kg							

Plumbing: 138-621 kPa. Machine supplied with 3/8" male flare fitting. All plumbed models that are CE listed feature backflow prevention.

Plumbing: 138-621 kPa. Machine supplied with 3/8" male flare fitting. All plumbed models that are CE listed feature backflow prevention.



Dimensions shown in centimetres For capacities, additional specs, manuals, care & cleaning, visit [www.bunn.com](http://www.bunn.com).

# Titan™ Dual Coffee Brewer and Server



Titan Dual Brewer

*High-volume brewing solution featuring simple operation, precise extraction control and portable servers*

- Brews up to 120 litres of coffee per hour.
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; variable by-pass controls coffee strength.
- BrewMETER® allows automatic programming of pulse routine. 
- Funnel has 750 gram capacity and paper filter retainers to eliminate fold-over.
- Left or right faucet for hot water.
- Display in English, Spanish, or Katakana.
- Large sprayhead.
- Energy Saver Mode. 
- Digital temperature control.

## TITAN TF SERVER

- 12 litre capacity
- ThermoFresh® servers are insulated to keep coffee hot and fresh for hours.
- Large cup clearance allows for dispensing into cups, decanters and thermal carafes.
- Brew-through lid.
- Integrated sight gauge assembly allows for easy cleaning.
- Innovative fast flow faucet design.

## RELATED PRODUCTS

**Titan/Urn Filter Pack**  
Product No.: 20111.0000



**Titan Funnel**  
Product No.: 40105.0000



**EQHP-54**  
Product No.: 39000.0006




**EQHP-54L**  
Product No.: 39000.0003




**Inlet Hose Assembly**  
Product No.: 32865.0002

**Flavour Label**  
Product No.: 41745.1000

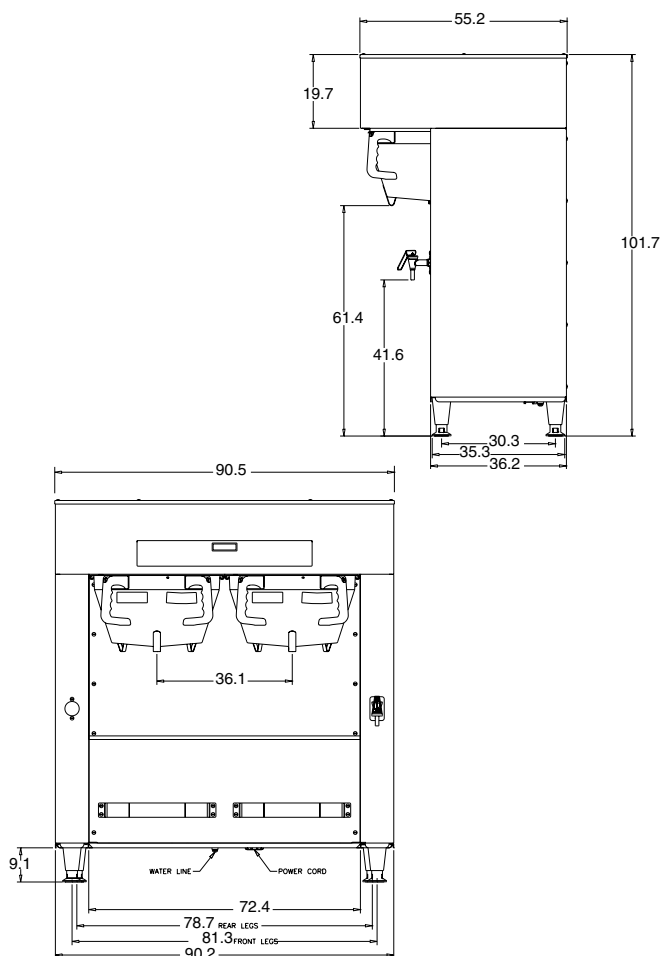

Titan TF Server





Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
39200.0002	Titan Dual	67.1 kg	400	16	11125	50/60	3	No	 
39200.0003			230	32.0	7360		1		
39400.0001	Titan Server	5.4 kg		24.3	8400		3		

Plumbing: 138-621 kPa. Machine supplied with 3/8" male flare fitting. All plumbed models that are CE listed feature backflow prevention.


# BrewWISE® Single ThermoFresh® DBC® Brewers




BrewWISE Single TF DBC

- Brews up to 43.2 litres of coffee per hour with three variable batch sizes.
- Stores individual coffee recipes.
- Large sprayhead and BrewWISE intelligence with pre-infusion and pulse brew for maximum flavour extraction. 
- Coffee strength controlled with variable by-pass.
- Wireless brewer-grinder interface via Smart Funnel® with SplashGard®. 
- Metric volume and Celsius temperature settings.
- Equipped with tank drain.

### RELATED PRODUCTS


**Single/Dual Filter Pack**  
Product No.: 20138.0000 

**EQHP-10**  
Product No.: 39000.0004 


**EQHP-10L**  
Product No.: 39000.0001 

**BrewWISE Recipe Writer**  
Product No.: 34444.0001 

**BrewWISE Recipe Card**  
Product No.: 34447.0000 

**Inlet Hose Assembly**  
Product No.: 32865.0002 

ThermoFresh servers sold separately.  
See page 28-29 for details.

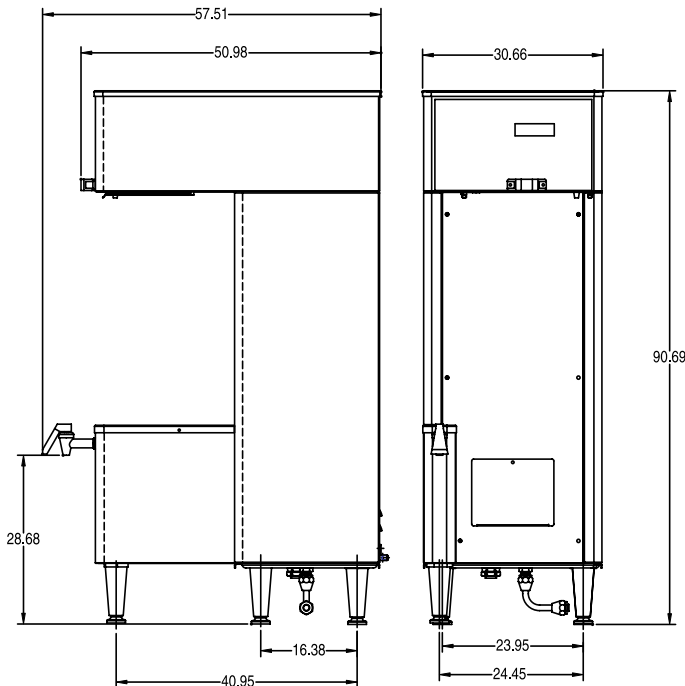

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
34800.0009	SINGLETF DBC, black, funnel locks	26.8 kg	230	16.6	4000	50/60	I	No	CE NSF V P KSA
34800.0012	SINGLETF DBC, funnel locks								
34800.0013	SINGLETF DBC, black, funnel locks		200	18.5	3700	60			NSF
34800.0016	SINGLETF DBC, funnel locks								



Plumbing: 138-621 kPa. Machine supplied with 3/8" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres For capacities, additional specs, manuals, care & cleaning, visit [www.bunn.com](http://www.bunn.com).

# BrewWISE® Dual ThermoFresh® DBC® Brewers



BrewWISE Dual TF DBC

- Brews up to 61.7 to 71.5 litres of coffee per hour with three variable batch sizes.
- Multi-phase brewer brews 65.5 to 98 litres of coffee per hour; and can be field converted to operate on either 3 phase or 1 phase.
- Stores individual coffee recipes.
- Large sprayhead and BrewWISE intelligence with pre-infusion and pulse brew for maximum flavour extraction. 
- Coffee strength controlled with variable by-pass.
- Wireless brewer-grinder interface via Smart Funnel® with SplashGard®. 
- Metric volume and Celsius temperature settings.
- Equipped with tank drain.

## RELATED PRODUCTS

**Single/Dual Filter Pack**  
Product No.: 20138.0000



**EQHP-10**  
Product No.: 39000.0004




**EQHP-10L**  
Product No.: 39000.0001

**Inlet Hose Assembly**  
Product No.: 32865.0002







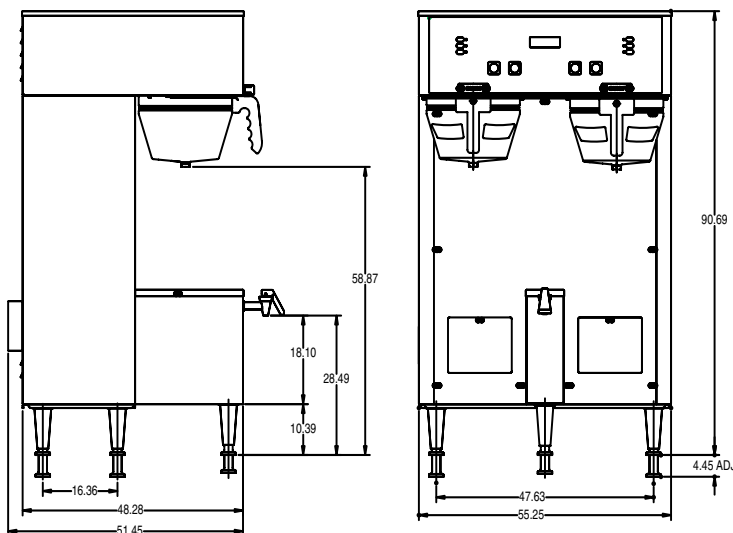


ThermoFresh servers sold separately  
See page 28-29 for details.  
See page 26 for additional related products.

27



**NOTE:** Catalog icon legend can be found on page 1.

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
34600.0011	DUAL TF DBC, funnel locks	41.96 kg	230	26.5	6100	50/60	1	No	    KSA
34600.0013	DUAL TF DBC, funnel locks		200	26.5	5300	60			
34600.0015	DUAL TF DBC, black, funnel locks		230	26.5	6100	50/60			
34600.0017	DUAL TF DBC, black, funnel locks		200		5300	60			
34600.0020	DUAL TF DBC, SST, 3 phase/1 phase, funnel locks, Master On/Off switch	42 kg	230 400	26.9 16	6200 11125	50/60	1 3	No	  
34600.0025	DUAL TF DBC, black, 3 phase/1 phase, funnel locks, Master On/Off switch		230 400	26.9 16	6200 11125		1 3		

Plumbing: 138-621 kPa. Machine supplied with 3/8" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres For capacities, additional specs, manuals, care & cleaning, visit [www.bunn.com](http://www.bunn.com).

# Digital ThermoFresh® Servers and Stand



5.7 Litre TF Server

*ThermoFresh servers hold beverages at optimum flavour profile for hours without requiring the energy consumption of traditional warming plates*

- Four-hour digital count-up timer.
- Volume indicator display.
- Vacuum insulated.
- Unique lid design features a pour spout for easy emptying and cleaning.
- Contemporary styling and wrap program for maximum merchandising.
- Digital sight gauge has a count-up timer that begins to count-up in one minute increments to specifically display how long the brewed beverage has been stored. Operates on four AAA batteries with an average 1-year lifespan. Display shows low battery symbol.
- Translucent faucet guard provides increased visibility while dispensing.
- Brew-through lid.
- Soft grip handle for easy transportation.

## TF SERVER WITH BASE

- Built-in drip tray is easily removed for cleaning or providing extra clearance for large vessels.
- Large cup clearance.
- Ideal for use with Single or Dual DBC Brewers.



Baseless 5.7 Litre TF Server

## TF BASELESS SERVER



- 17.9 cm cup clearance.
- Ideal for use with the Infusion Coffee Brewer (ICB)
- Use with the TF Server Stand for easy dispensing. Product No. 39795.0000



TF Server Stand



Digital Sight Gauge with Count-up Timer

Product #	Description	Dimension	Weight	Cord Attached	Agency
42700.0000	DSG TF Server; 3.8 litre, SST	52.3cm H x 23.6cm W x 33cm D	6.8 kg		 
42700.0001	DSG TF Server; 3.8 litre, black				
42750.0000	DSG TF Server; 5.7 litre, SST	57.7cm H x 23.6cm W x 33cm D	7.3 kg		
42750.0001	DSG TF Server; 5.7 litre, black				
42700.0050	Baseless DSG TF Server; 3.8 litre, SST	32cm H x 23.1cm W x 32.3cm D	4.9 kg		
42700.0051	Baseless DSG TF Server; 3.8 litre, black				
42750.0050	Baseless DSG TF Server; 5.7 litre, SST	37.3cm H x 23.1cm W x 32.3cm D	5.4 kg		
42750.0051	Baseless DSG TF Server; 5.7 litre, black				
39795.0000	TF Server Stand	22.1cm H x 23.9cm W x 32.8cm D	1.9 kg		

# ThermoFresh® Servers and Stand



5.7 Litre TF Server

*ThermoFresh servers hold beverages at optimum flavour profile for hours without requiring the energy consumption of traditional warming plates*

- Vacuum insulated.
- Easily transport coffee to remote locations.
- Fast flow faucet.
- Brew-through lid.

## TF SERVER WITH BASE

- Built-in drip tray is easily removed for cleaning or providing extra clearance for large vessels.
- Large cup clearance.
- Ideal for use with Single or Dual TF DBC Brewers.

## RELATED PRODUCTS

Flavour Label  
Product No.: 41745.1000



Baseless 3.8 Litre TF Server

## TF BASELESS SERVER

- Use with the TF Server Stand for easy dispensing. Product No. 39795.0000
- Ideal for use with the Infusion Coffee Brewer (ICB).



TF Server Stand

Product #	Model	Dimension	Weight	Cord Attached	Agency
39500.0000	TF Server; 3.8 litre, SST	52.8cm H x 23.6cm W x 33cm D	5.9 kg		 
39500.0001	TF Server; 3.8 litre, black				
39550.0000	TF Server; 5.7 litre, SST	58.2cm H x 23.6cm W x 33cm D	6.4 kg		
39550.0001	TF Server; 5.7 litre, black				
39500.0004	Baseless TF Server; 3.8 litre, SST	32.5cm H x 23.1 cm W x 33.3cm D	5.9 kg		
39500.0005	Baseless TF Server; 3.8 litre, black				
39550.0004	Baseless TF Server; 5.7 litre, SST	37.8cm H x 23.1 cm W x 33.3cm D	6.4 kg		
39550.0005	Baseless TF Server; 5.7 litre, black				
39795.0000	Stand assembly,TF Server	22.1 cm H x 23.9cm W x 32.8cm D	1.9 kg		



Dimensions shown in centimetres For capacities, additional specs, manuals, care & cleaning, visit [www.bunn.com](http://www.bunn.com).

# BrewWISE® Single Soft Heat® DBC® Brewers



Single SH DBC

*Soft Heat technology automatically manages heat in the server docking system to ensure optimum flavour profile for hours*

- Brews up to 43.2 litres of coffee per hour with three variable batch sizes.
- Stores individual coffee recipes.
- Large sprayhead and BrewWISE intelligence with pre-infusion and pulse brew for maximum flavour extraction. 
- Coffee strength controlled with variable by-pass.
- Wireless brewer-grinder interface via Smart Funnel® with SplashGuard®. 
- Metric volume and Celsius temperature settings.

## RELATED PRODUCTS

**Single/Dual Filter Pack**  
Product No.: 20138.0000



**EQHP-10**  
Product No.: 39000.0004



**EQHP-10L**  
Product No.: 39000.0001

**BrewWISE Recipe Writer**  
Product No.: 34444.0001



**BrewWISE Recipe Card**  
Product No.: 34447.0000











**Inlet Hose Assembly**  
Product No.: 32865.0001

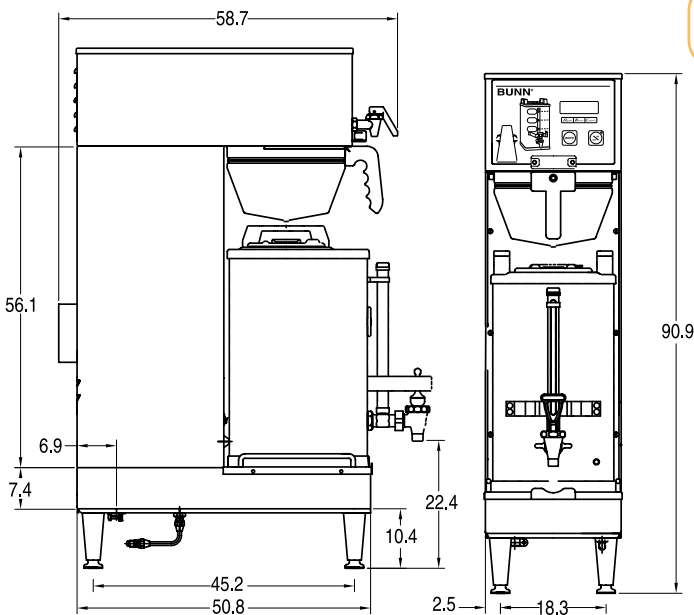**One Position Drip Tray**  
For use with Single/Single SH  
Product No. : 26830.0000



Soft Heat servers and stands sold separately.  
See page 34 for details.



Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
33600.0003	SINGLE SH DBC, funnel locks	26.8 kg	230	16.6	4000	50/60	I	No	    KSA
33600.0005	SINGLE SH DBC, 17 hole spray head		200	19	3800				
33600.0012	SINGLE SH DBC, funnel locks		220	12.7	2800	60			  

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres For capacities, additional specs, manuals, care & cleaning, visit [www.bunn.com](http://www.bunn.com).





# BrewWISE® Dual Soft Heat® DBC® Brewers



Dual SH DBC

*Soft Heat technology automatically manages heat in the server docking system to ensure optimum flavour profile for hours*

- Brews up to 71.5 litres of coffee per hour with three variable batch sizes.
- Stores individual coffee recipes.
- Large sprayhead and BrewWISE intelligence with pre-infusion and pulse brew for maximum flavour extraction. 
- Coffee strength controlled with variable by-pass.
- Wireless brewer-grinder interface via Smart Funnel® with SplashGard®. 
- Metric volume and Celsius temperature settings.

## RELATED PRODUCTS

**Single/Dual Filter Pack**  
Product No.: 20138.0000



**EQHP-10**  
Product No.: 39000.0004



**EQHP-10L**  
Product No.: 39000.0001

**BrewWISE Recipe Writer**  
Product No.: 34444.0001



**BrewWISE Recipe Card**  
Product No.: 34447.0000










**Inlet Hose Assembly**  
Product No.: 32865.0001

**Two Position Drip Tray**  
For use with Dual/Dual SH  
Product No.: 27150.0000

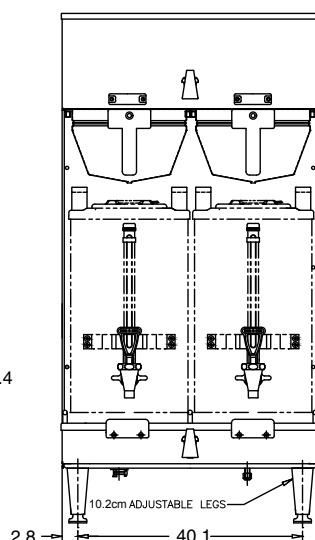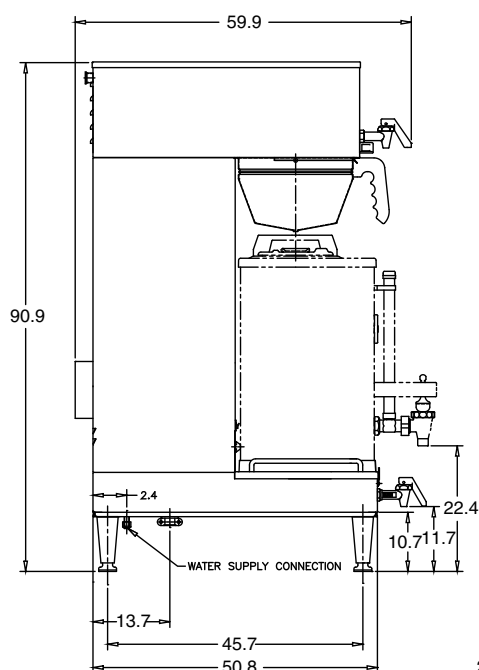

Soft Heat servers and stands sold separately.  
See page 34 for details.



Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
33500.0008	DUAL SH DBC, funnel locks	26.8 kg	230	26.9	6200	50/60	I	No	  
33500.0014	DUAL SH DBC, 17 hole spray head		200	28	5600				
33500.0021	DUAL SH DBC, funnel locks		220	25.5	5600	60			 

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.



# Single® Soft Heat® Brewers




Single SH

- Brews up to 40.1 litres of coffee per hour with three variable batch sizes.
- Electronic grinder interface instructs G9T-2 grinder on exact amount of coffee for selected brew batch size.
- Soft Heat® server heat control automatically shuts off once target temperature is reached. Can be set to 79.4° - 87.8°C.
- Holds one 5.7 litre SH server; sold separately.
- Remote one or two server dock stations, sold separately.

RELATED PRODUCTS

Single/Dual Filter Pack  
Product No.: 20138.0000 


EQHP-10  
Product No.: 39000.0004 





EQHP-10L  
Product No.: 39000.0001

Inlet Hose Assembly  
Product No.: 32865.0001 

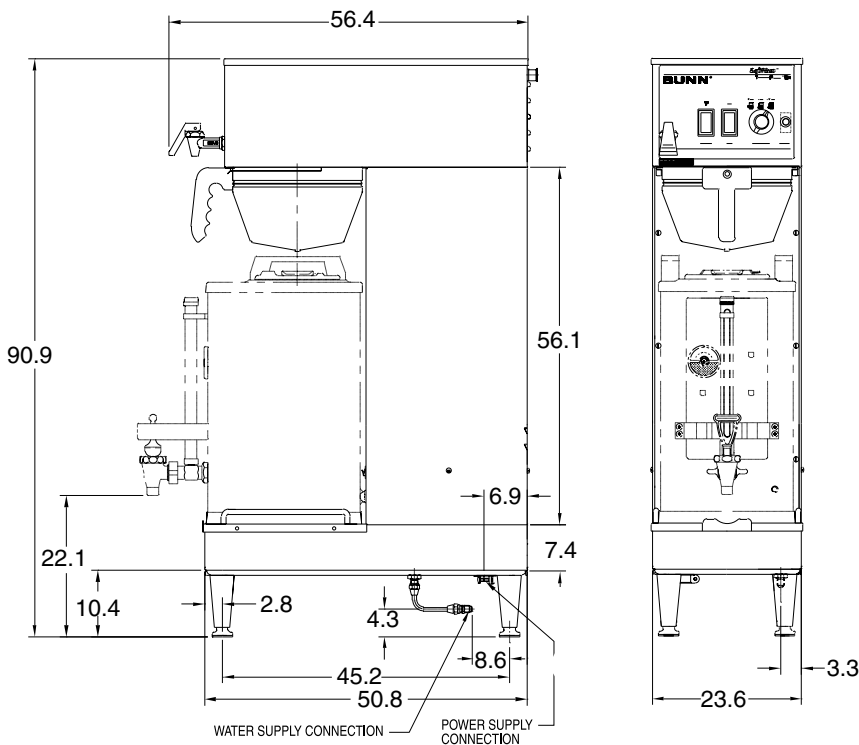One Position Drip Tray  
For use with Single/Single SH  
Product No. : 26830.0000

Soft Heat servers and stands sold separately.  
See page 34 for details.



Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
27800.0006	SINGLE SH	26.8 kg	230	13.5	3100	50/60	1	No	 
27800.0021			220	12.7	2800	60			 

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres For capacities, additional specs, manuals, care & cleaning, visit [www.bunn.com](http://www.bunn.com).

# Dual® Soft Heat® Brewers



Dual SH

- Brews up to 61.7 litres of coffee per hour with three variable batch sizes.
- Multi-phase brewer brews 65.5 to 98.4 litres of perfect coffee per hour, and can be converted to operate on either 3 phase or 1 phase.
- Electronic grinder interface instructs grinder on exact amount of coffee for selected brew batch size.
- Soft Heat® server heat control automatically shuts off once target temperature is reached. Can be set to 79.4° - 87.8°C.
- Holds two 5.7 litre SH servers, sold separately.

## RELATED PRODUCTS

**Single/Dual Filter Pack**  
Product No.: 20138.0000



**EQHP-10**  
Product No.: 39000.0004





**EQHP-10L**  
Product No.: 39000.0001





**Inlet Hose Assembly**  
Product No.: 32865.0001

**Two Position Drip Tray**  
For use with Dual/Dual SH  
Product No.: 27150.0000

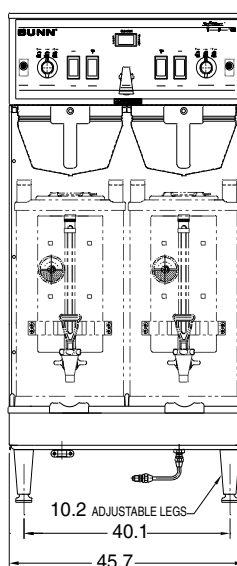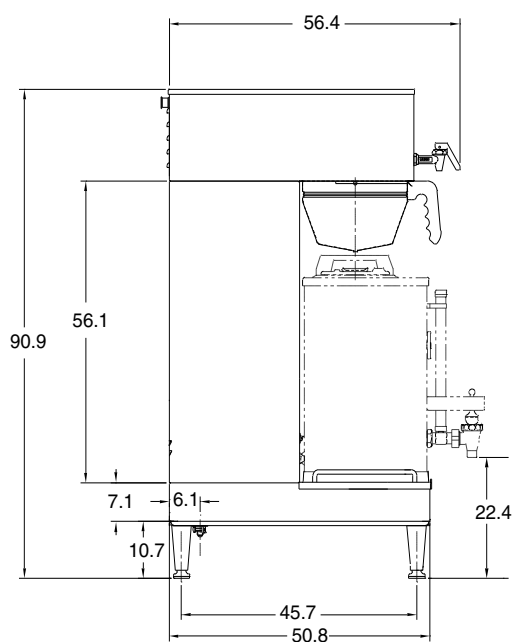

Soft Heat servers and stands sold separately.  
See page 34 for details.




Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
27900.0006	DUAL SH, mechanical thermostat	26.8 kg	230	26.9	6200	50/60	1	No	 
27900.0037	DUAL SH, mechanical thermostat		220	25.5	5600	60			
27900.0031	DUAL SH, 3 phase/1 phase, Master On/Off switch	40.9 kg	230 400	26.9 14.5	6200 10000	50/60	1 3	No	 

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.


# Soft Heat<sup>®</sup> Servers and Stands




SH Server and ISH Stand

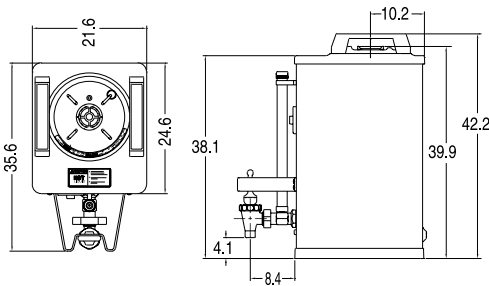

SH Server

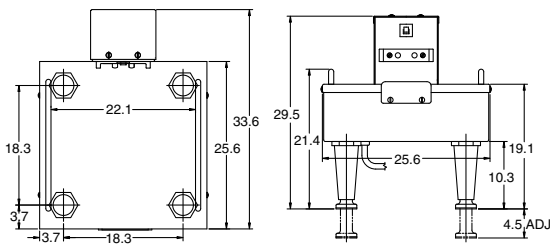


ISH Stand

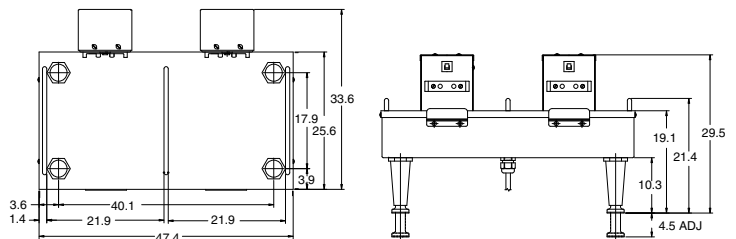

2SH Stand

*Soft Heat technology automatically manages heat in the server docking system to ensure optimum flavour profile for hours*

## SH SERVER

















- Soft Heat<sup>®</sup> servers supply controlled heat to coffee to maintain flavour and temperature.
- LED power indicator shows server is operational.
- Safety-Fresh<sup>®</sup> brew-through lid with vapour seal and spill prevention. 
- For use with Single/Dual SH and Single/Dual SH DBC

## SH STAND

- Remote one and two server docking stations for additional satellite coffee serving.
- Docking stations have instant power contact with servers.




2SH Stand

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
27850.0001	SH SERVER, 5.7 litre capacity, no flashing lamp	7.7 kg							 
27850.0006	SH SERVER, 5.7 litre capacity, 45 minute								
27850.0009	SH SERVER, 5.7 litre capacity, adjustable timer								
27850.0016	SH SERVER, 5.7 litre capacity, 240 minute								
27850.0036	SH SERVER, 5.7 litre capacity, Korea								
27825.0001	ISH STAND, holds 1 SH server	5.9 kg	220/230	0.35	75	50/60	1	Yes	 
27825.0002	ISH STAND, holds 1 SH server; UK plug							UK Plug	   
27825.0015	SH STAND, holds 1 SH server; Korea								
27875.0001	2SH STAND, holds 2 SH servers	10 kg	220/230	0.7	150	50/60		Yes	 
27875.0002	2SH STAND, holds 2 SH servers; UK plug							UK Plug	   
27875.0013	2SH STAND, holds 2 SH servers; Korea								

# Single<sup>®</sup> Brewers with Portable Server



Single  
(server included)

- Brews 19.3 to 43.2 litres of coffee per hour with three variable batch sizes.
- Adjustable bypass ensures perfect coffee regardless of batch size.
- Upper hot water faucet on all models does not affect brew level.
- Electronic timer ensures fast set up and accurate brew levels.
- Electronic grinder interface instructs grinder on exact amount of coffee for selected brew batch size.
- 5.7 litre, 1.5 GPR portable server has Safety-Fresh<sup>®</sup> brew-through lid with vapour seal and spill protection. 
- Equipped with tank drain.

## RELATED PRODUCTS

**Single/Dual Filter Pack**  
Product No.: 20100.0000



**EQHP-10**  
Product No.: 39000.0004




**EQHP-10L**  
Product No.: 39000.0001

**Inlet Hose Assembly**  
Product No.: 32865.0001




**One Position Drip Tray**  
For use with Single/Single SH  
Product No.: 26830.0000

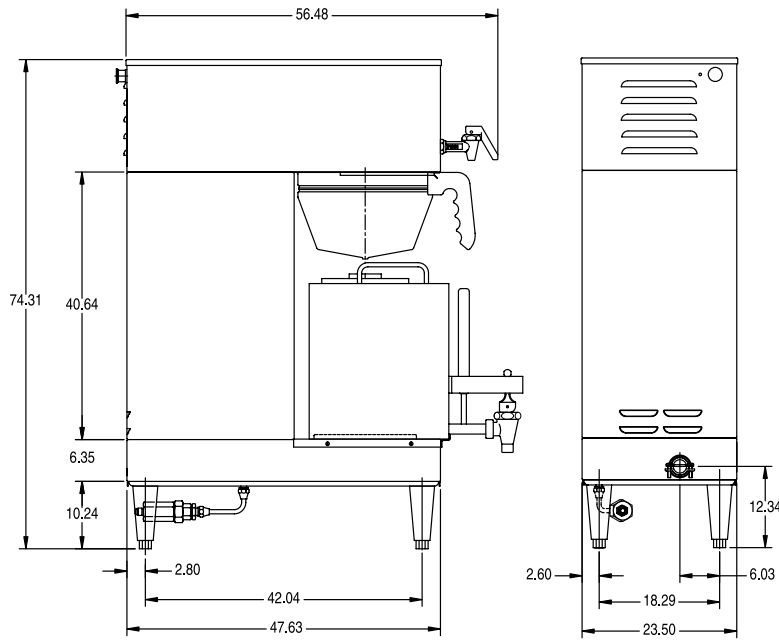

Additional GPR Portable servers and warmers.  
See page 37 for details.



**NOTE:** Catalog icon legend can be found on page 1.

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
23050.0049	SINGLE, mechanical thermostat, stainless funnel	26.3 kg	230	13.7	3150	50/60	I	No	
23050.0047	SINGLE, mechanical thermostat, stainless funnel		200	19.3	3850	50			
23050.0058	SINGLE, mechanical, stainless funnel, Korea		230	13.7	3150	50/60			

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres For capacities, additional specs, manuals, care & cleaning, visit [www.bunn.com](http://www.bunn.com).

# Dual<sup>®</sup> Brewers with Portable Server



Dual  
(servers included)

- Brews 6 l.7 to 7 l.5 litres of coffee per hour with three variable batch sizes.
- Adjustable bypass ensures perfect coffee regardless of batch size.
- Upper hot water faucet on all models does not affect brew level.
- Electronic timer ensures fast set up and accurate brew levels.
- Electronic grinder interface instructs grinder on amount of coffee for selected brew batch size.
- 5.7 litre, 1.5 GPR portable servers have a Safety-Fresh<sup>®</sup> brew-through lid with vapour seal and spill protection.
- Equipped with tank drain.

### RELATED PRODUCTS

Single/Dual Filter Pack  
Product No.: 20100.0000



EQHP-10  
Product No.: 39000.0004




EQHP-10L  
Product No.: 39000.0001

Inlet Hose Assembly  
Product No.: 32865.0001

Two Position Drip Tray  
For use with Dual/Dual SH  
Product No.: 27150.0000



Additional GPR Portable servers and warmers.  
See page 37 for details.

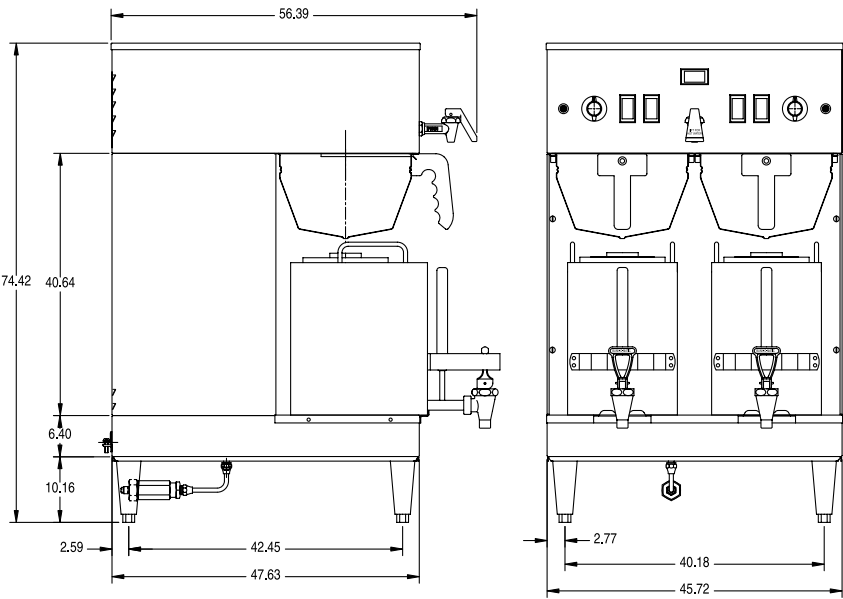

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
20900.0055	DUAL, mechanical thermostat, stainless funnel	44.5 kg	230	27.4	6300	50/60	I	No	
20900.0084	DUAL, mechanical, SST, Korea								

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres For capacities, additional specs, manuals, care & cleaning, visit [www.bunn.com](http://www.bunn.com).


# Portable Servers and Warmers for Satellite Brewers



I GPR with RWS I


I.5GPR with RWS I

## PORTABLE SERVER


- Models available with capacities up to 3.8 or 5.7 litres.
- Portable servers for remote service.
- Safety-Fresh® brew-through lid with vapour seal and spill protection. 

## WARMER


- Models available to accommodate 3.8 or 5.7 litre servers.
- Legs are adjustable on RWS I.
- For use with Single and Dual.

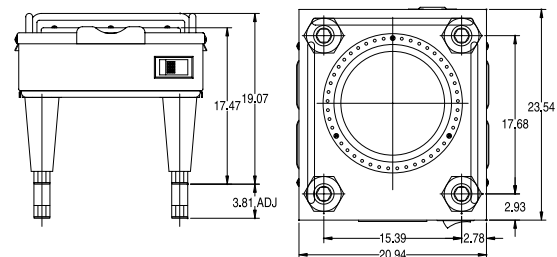

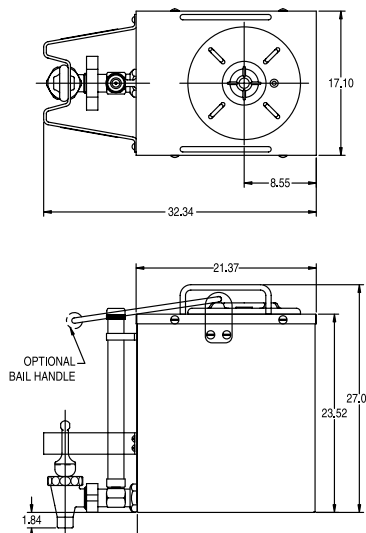

RWS I

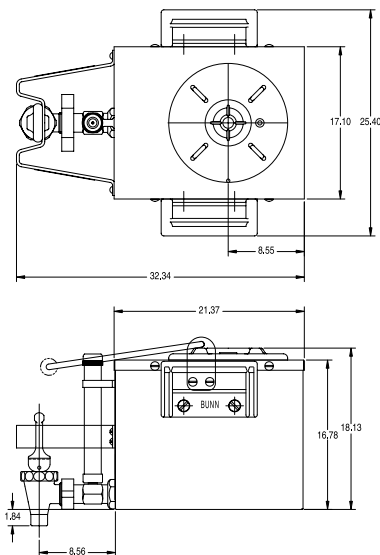

I.5GPR-FF  
(top handles)



IGPR  
(side handles)

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
I2487.0001	I GPR SS, 3.8 litre, bail handle	3.9 kg							
I2487.0003	I GPR SS, 3.8 litre, side handle	3.9 kg							
I2487.0005	I GPR-FF, 3.8 litre, fast flow faucet, bail handle	4.1 kg							
20950.0004	I.5GPR-FF, 5.7 litre, fast flow faucet, top handle	4.5 kg							
I2203.0011	RWS I A	4.1 kg	230	0.5	118	50/60	I	No	
I2203.0012	RWS I B		100	0.9	91	50		Yes	


Dimensions shown in centimetres For capacities, additional specs, manuals, care & cleaning, visit [www.bunn.com](http://www.bunn.com).



# BrewWISE® Hot Beverage Systems



Single SH DBC

- Perfect for Hot Milk Tea or Hot Milk Coffee.
- Single brews up to 43.2 litres and Dual brews up to 71.5 litres of tea or coffee per hour with three variable batch sizes.
- Reduce accidents with safety features that decrease hot splashes from funnel, eliminate brewing when funnel or server is not present.
- Troubleshoot all switches and electrical components from the front panel with advanced diagnostic service tools.
- Consistently brew perfect tea using Digital Brewer Control with pulse brew. 
- Metric volume and Celsius temperature settings.
- Holds tea or coffee at just the right temperature for preparing superior Hot Milk beverages.

### RELATED PRODUCTS

**Single/Dual Filter Pack**  
Product No.: 20138.0000



**EQHP-10**  
Product No.: 39000.0004



**EQHP-10L**  
Product No.: 39000.0001


**Soft Heat servers sold separately.**  
Product No.: 27850.0023  
Specifically designed for use with Hot Beverage System  
**See page 34 for details.**



**One Position Drip Tray**  
For use with Single/Single SH  
Product No. : 26830.0000





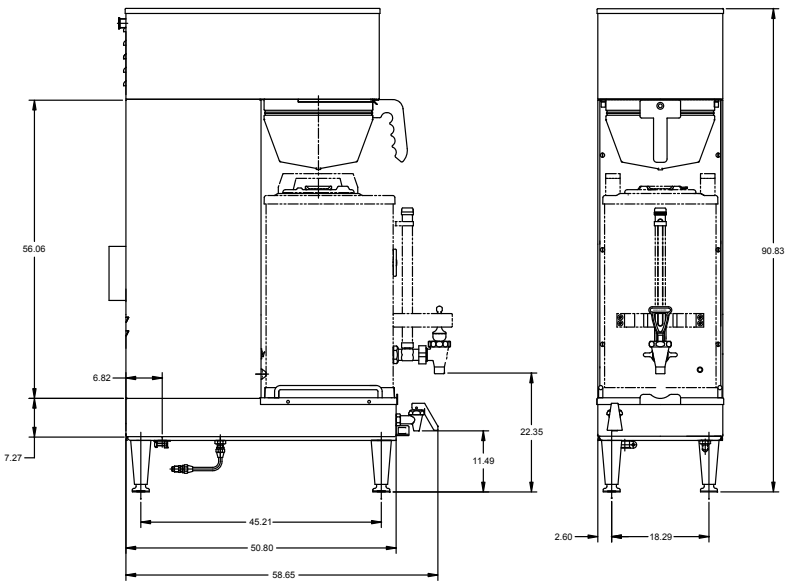




**Two Position Drip Tray**  
For use with Dual/Dual SH  
Product No. : 27150.0000



Single SH DBC



Dual SH DBC

Product #	Description	Weight	Volts	Amps	Watts	Hertz	Phase	Cord	Agency
33600.0006	SINGLE SH DBC, funnel lock	26.8 kg	230	19	4400	50/60	I	No	  
33600.0021				13.5	3100				
33500.0034	DUAL SH DBC, lower faucet	40.8 kg		26.9	6200				   

Plumbing: 138-621 kPa. Machine supplied with 1/4" male fitting. All plumbed models that are CE listed feature backflow prevention.

Dimensions shown in centimetres For capacities, additional specs, manuals, care & cleaning, visit [www.bunn.com](http://www.bunn.com).