

## Twin Airpot Coffee Brewer

### Features

#### Twin Airpot Coffee Brewer

- Brews 15 gallons (56.8 litres) of perfect coffee per hour.
- Brews directly into 1.9 to 3 litre airpots.
- Twin brew head system.
- Hot water faucet.
- Convenient airpots keep coffee hot for hours.
- Airpots are easily transported to remote meeting rooms, breakfast bars, etc.
- Digital timer enables users to make brew cycle adjustments from the front panel.
- Pourover feature on both sides.
- SplashGard® funnel deflects hot liquids away from the hand.
- Gourmet funnel model available for use with heavier throw weights of coffee.



#### Model CWTF Twin APS with Airpots

(airpots sold separately)

Dimensions: 23.5" H x 16" W x 19.7" D  
(59.7cm H x 40.6cm W x 50.0cm D)

For current specification sheets and other information, go to [www.bunn.com](http://www.bunn.com).

### Related Products

**Easy Clear® EQHP-10**  
Product No. : 39000.0004



**Easy Clear® EQHP-10L**  
Product No. : 39000.0001

**Paper Filter Pack**  
Product No. : 20115.0000  
Packed per case: 1,000

Dimensions: 4 1/4" Base x 2 3/4" Sidewall  
10.8 cm Base x 6.98 cm Sidewall



**2.2 liter Push-Button Airpot**  
Product No. : 28696.0002  
Capacity: 74 oz. (2.19 L)

**2.5 liter Push-Button Airpot**  
Product No. : 13041.0001  
Capacity: 84 oz. (2.48 L)

**2.5 liter Lever-Action Airpot**  
Product No. : 32125.0000  
Capacity: 84 oz. (2.48 L)

**3.0 liter Lever-Action Airpot**  
Product No. : 32130.0000  
Capacity: 102 oz. (3.0 L)



**Universal Airpot Racks**  
for push-button and lever-action airpots.  
See page A3.9 for more information.



**Gourmet C Funnel**  
Product No.: 34559.0000 (7.12 inch width)  
34559.0001 (7.62 inch width)

- Universal design – handle may be moved to appropriate side
- Allows brewing with heavier throw weights of coffee.
- Paper Filter Pack  
Product No. : 20100.0000  
Packed per case: 1,000



#### Model

CWTF Twin APS

#### Agency Listing



## Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Cu. Ft.	Shipping Weight	Cord Attached
CWTF Twin APS	23400.0041	120/240	25.8	2 @ 3000	6250	15 gal./hr.	6.4	60 lbs.	No
CWTF Twin APS*	23400.0046	120/240	27	2 @ 3000	6250	15 gal./hr.	8.4	60 lbs.	No


Airpots not included \*Model has gourmet funnel.

**Brewing capacity:** based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: 3-wires plus ground service rated 120/240V, single phase, 60Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 3/8" male flare fitting.

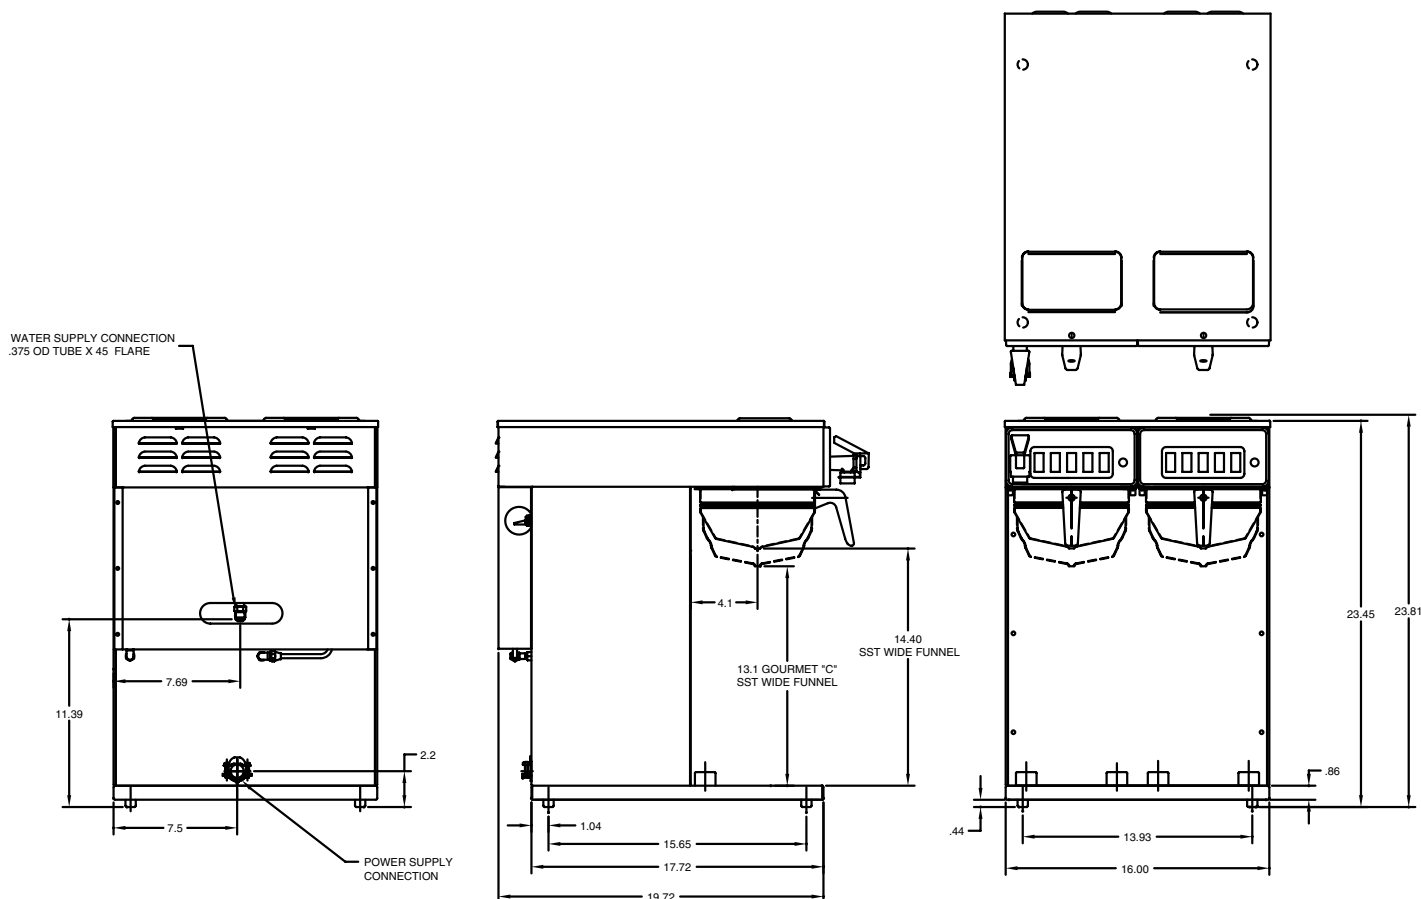

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • [www.bunn.com](http://www.bunn.com)

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches.

10/09 © Bunn-O-Matic Corporation