

BrewWISE® Single Soft Heat® DBC Brewer

ITEM#		
PROJECT		

DATE



Model Single SH DBC shown with 1.5 gallon SH Servers*

(servers sold separately)
Dimensions: 35.8" H x 9.3" W x 23.1" D
(90.9cm H x 23.6cm W x 53.8cm D)

Features

BrewWISE® Brewing System

- Brews 11.4 gallons (43.2 liters) of perfect coffee per hour.
- Brews ½, 1, or 1½ gallon (1.9, 3.8 or 5.7 liter) batches.
- Stores individual coffee and flavor profiles using adjustable water volume, bypass percentage, Pulse-Brew, and pre-infusion timing.
- Operate any combination of BrewWISE®equipment error-free with wireless brewer-grinder interface via Smart Funnel.
- Reduce accidents with safety features that decrease hot splashes from funnel, eliminate brewing when funnel or server is not present.
- Troubleshoot all switches and electrical components from the front panel with advanced diagnostic service tools.
- Consistently brew perfect coffee using Digital Brewer Control with pulse brew
- Simplify installation and calibration by creating your own recipe cards and dedicated funnels with the BrewWISE Recipe Writer on your PC (Windows® compatible).
- International electrical configurations available.

For current specification sheets and other information, go to www.bunn.com.

*International models may vary in appearance.

Related Products

Easy Clear® EQHP-10 Product No.: 39000.0004

Easy Clear® EQHP-10L Product No.: 3900.1001



BrewWISE® Recipe Writer (BRW)

Product No.: 34444.0000 (120V)

Dimensions:

 $2\%_{16}$ " H x 6% " W x 9% " D 5.56 cm H x 16.2 cm W x 24.1 cm D



G9-2T DBC

Product No.: 33700.6000

 Grinder holds 6 pounds each of regular and decaf or specialty

beans.



Recipe Card

Product No.: 34447.0000

 Program a recipe to be used on brewer or grinder.



Ad Card

Product No.: 34448.0000

 Program a message to appear on the brewer's display.



Product No.: 20138.0000 Packed per case: 500 Dimensions:

Single/Dual Filter Pack

 $5\frac{1}{4}$ " Base x $4\frac{1}{4}$ " Sidewall 13.3 cm Base x 10.8 cm Sidewall

Model	Agency Listing
Single SH DBC	®
G9-2T DBC	(
SH Server and Stands	®

E9001.7025B Patents Apply 12/06 A2.8

Dimensions & Specifications





Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	Capacity per hour	Cubic ft³/m³	Weight lbs/kg	Cord Attached
Single SH DBC	33600.6000	120/240	17.5	4000	4100	11.4 gal /43.2 liter	7.9 /.22	59 /26.8	No
Single SH DBC [†]	33600.6001	120/240	17.5	4000	4100	11.4 gal /43.2 liter	7.9 /.22	59 /26.8	No
G9-2T DBC	33700.6000	120	9.4	n/a	n/a	n/a	5.1 /.14	66 /29.9	Yes
SH Server(1.5 gal.)	27850.6001	n/a	n/a	n/a	n/a	1.5 gal /5.68 liter	2.9 / .08	18 /8.2	No
1SH Stand	27825.6000	120	.75	n/a	90	Holds 1 SH Server	1.5 /.04	13 /5.9	Yes
2SH Stand	27875.6000	120	1.5	n/a	180	Holds 2 SH Servers	2.5 /.07	22 /10.0	Yes


[†]Model has funnel lock system. Note: Soft Heat® Brewers and Servers are boxed and shipped separately. Brewing capacity: based upon incoming water temp of 60°F (140°F rise).

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: Brewer is 3-wires plus ground service rated 120/208V or 120/240V, single phase, 60Hz.

Grinder is 2-wires plus ground service rated 120V, 60Hz, circuit required, ¾ HP motor.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 1/4" (6.4 mm) male fitting.

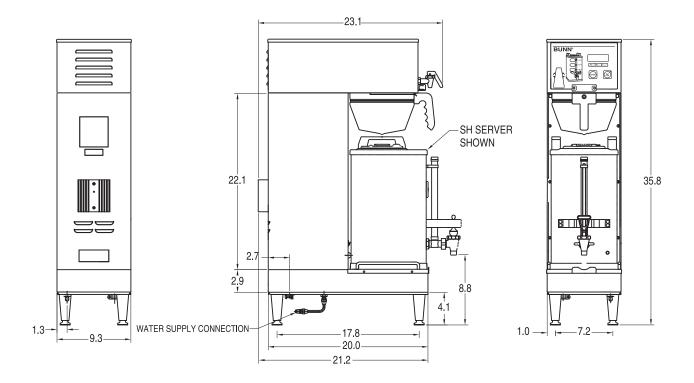

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com