

## Titan™ Single Brewer



### Features

#### Titan Single Brewer

*High-volume brewing solution that features simple operation, precise extraction control and portable servers*

- Brews up to 22.5 gallons (85.2 litres) of perfect coffee per hour.
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- BrewMETER™ allows automatic programming of pulse routine.
- SplashGard® funnel and funnel lock help improve safety.
- Funnel has 28 ounce (.8 kg) ground coffee capacity and paper filter retainers to eliminate fold-over.
- Titan TF servers are insulated to keep coffee hot for hours.
- Hot water faucet.

#### Model Titan Single Brewer with 3 gallon TF Server

*(servers sold separately)*

Dimensions: 40.02" H x 21.3" W x 21.74" D  
(101.7cm H x 54.1cm W x 55.2cm D)

For current specification sheets and other information, go to [www.bunn.com](http://www.bunn.com).

### Related Products

#### Easy Clear® EQHP-54

Product No. : 39000.0006



#### Easy Clear® EQHP-54L

Product No. : 39000.0003

#### Titan/Urn Filter Pack

Product No. : 20111.0000

Packed per case: 250

Dimensions:

20" Base x 8" Sidewall

50.8 cm Base x 20.3 cm Sidewall



#### Titan TF Server

Product No.: 39400.6000

3 gallon



#### Titan Funnel

Product No.: 40105.0000



#### Model

Titan Single

#### Agency Listing



## Dimensions & Specifications

CANADA



Model	Product #	Volts	Amps	Total Watts	Capacity per hour	Cubic ft <sup>3</sup> /m <sup>3</sup>	Weight lbs/kg	Funnel Locks	Cord Attached
Titan Single	39300.6000	120/208 (3-phase)	33.4	12000	22.5 gal/85.2 L	17.4/.49	110/49.9	Yes	No
		*120/208 (single-phase)	40.1	8200	17 gal/64.3 L				


**Brewing capacity:** based upon incoming water temp of 60°F (140°F rise).

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

\*Brewer can easily be rewired in the field for single-phase operation.

Electrical: Brewer is 4-wires plus ground service rated 120/208V, 3-phase, 50/60Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 3/8" male flare fitting. Requires 4 gpm minimum water flow.

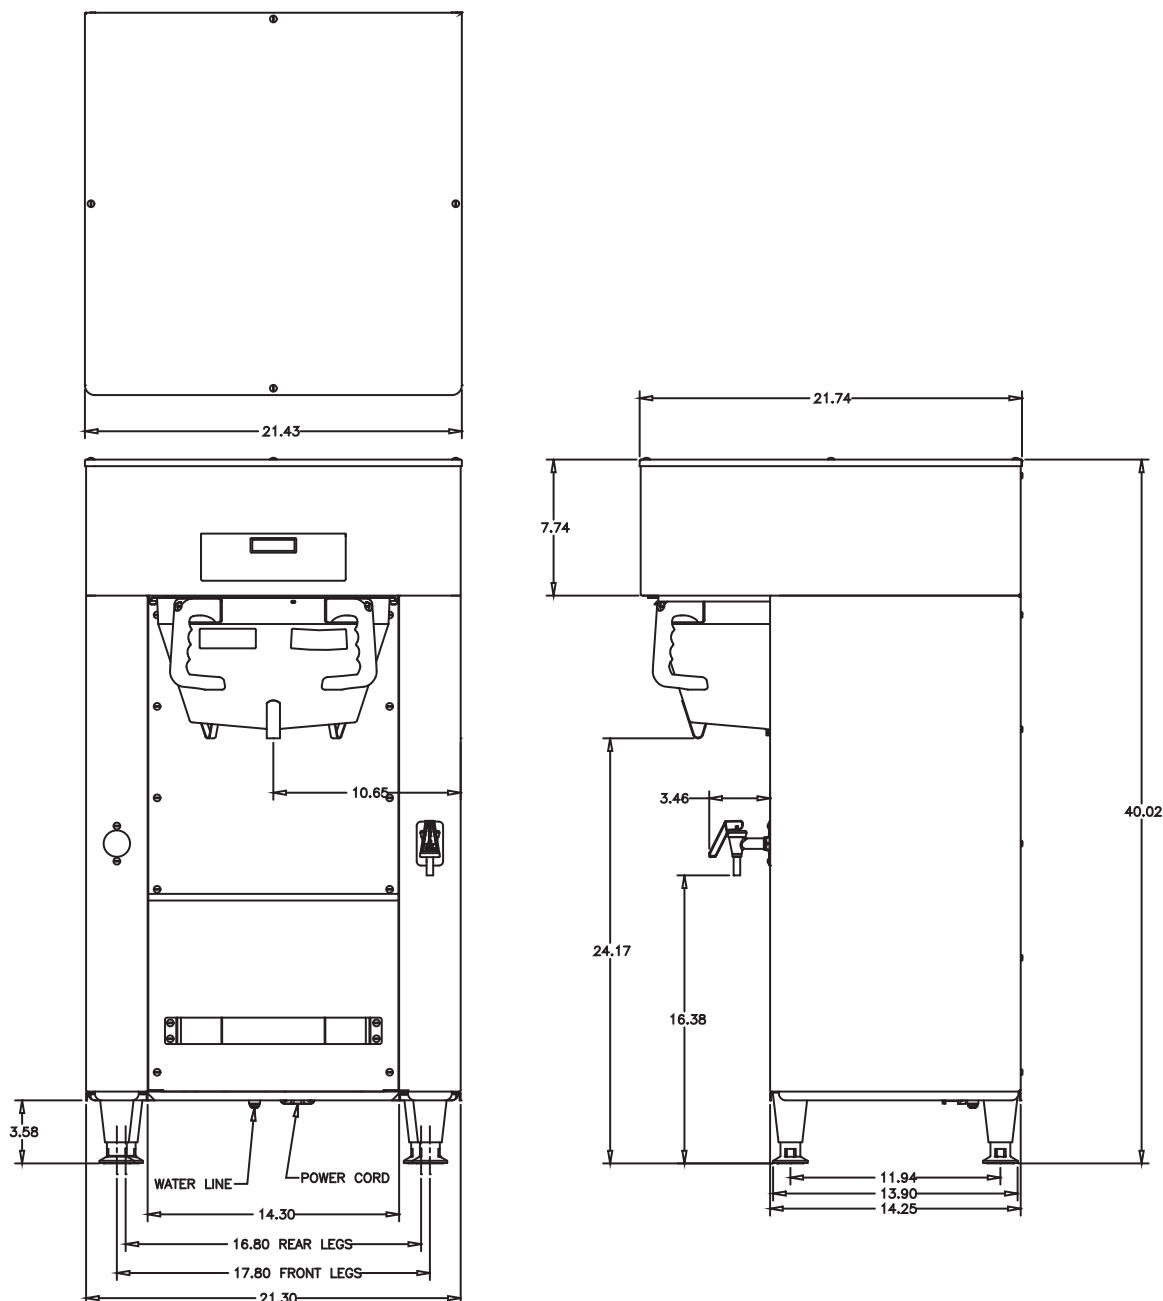

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • [www.bunn.com](http://www.bunn.com)

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.