BUNN[®] INTERNATIONAL

| II⊏IVI# | | |
|---------|--|--|
| | | |
| | | |

PROJECT

DATE

G2 trifecta™ Grinder



Features

G2 trifecta™ Grinder

- · Chute assembly accommodates trifecta brewer brew cup.
- Expanded range of precise grinds can be selected.
- Heavy-duty precision burrs for quality, finer grinds.
- Convenient cleaning lever ensures complete clean out of coffee from grind chamber.
- May also be used as a bulk grinder in behind-the-counter applications.
- Hopper holds 2 lbs. (.91 kg) of fresh coffee beans.
- Three year warranty on grinding burrs.

G2 trifecta[™] GrinderDimensions: 26.5"H x 7.3"W x 15.9"D
(67.3cm H x 18.54cm W x 40.4cm D)
See page 2 for installation space requirements.

For current specification sheets and other information, go to www.bunn.com.

Related Products

Precision Burrs

All BUNN grinders use precision burrs to cut (not crush) the coffee beans and deliver consistent grind distribution. BUNN burrs are rated at a Rockwell hardness of 66C, resulting in an exceptionally long burr life.



trifecta Conversion Kit G2/G3

Product No.: 43233.1001


trifecta Conversion Kit G1 Product No.: 43233.1000



Dimensions & Specifications

| Model | Product # | Volts | Amps | Capacity | Shipping Weight | Cord Attached | Agency |
|-------------|------------|-------|------|----------|--------------------|------------------|--------|
| G2 TRIFECTA | 41900.0001 | 230 | 4.5 | 2 lbs. | 59 lbs. | Yes | (€ |
| | | | | (09 kg.) | (26.8 kg) | No Plug | |
| G2 TRIFECTA | 41900.0002 | 100 | 9.4 | 2 lbs. | 59 lbs. | Yes | |
| | | | | (09 kg.) | (26.8 kg) | NEMA Plug | |

Electrical: 230V model requres 2-wires plus ground service rated 220-240V, single phase, 50 Hz., ¾ HP motor. 100V model requres 2-wires plus ground service, single phase, 60 Hz., ¾ HP motor.

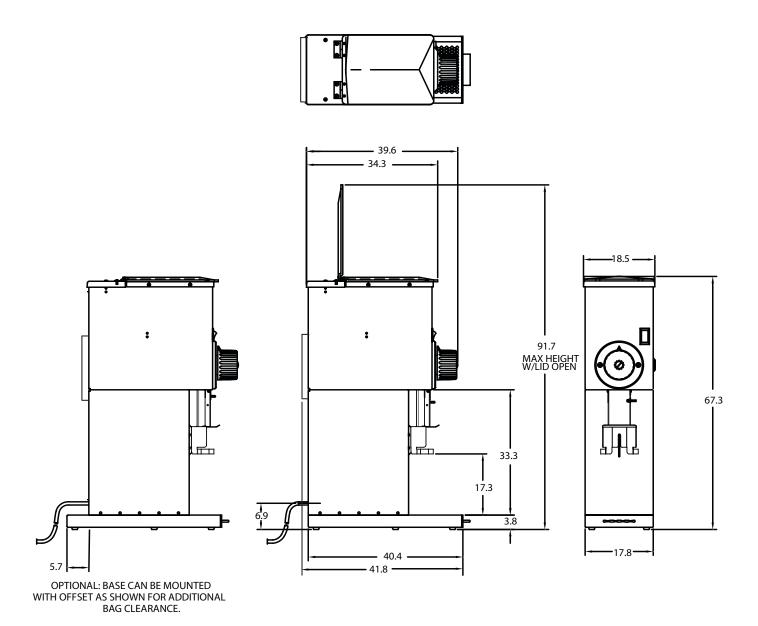

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com