

Liquid Coffee Ambient Dispenser For Iced Coffee

Features

Liquid Coffee Ambient Dispenser

- Attractive appearance and narrow 12" (30.5 cm) width.
- Accommodates all ½ gallon (1.9 liter) and most 1 gallon (3.8 liter) bag-in-box (BIB) containers.
- Connects to ambient water supply for a final coffee beverage served over ice.
- Refill or rinse LED lights alert the operator when more concentrate or cleaning is needed.



Model LCA-2, IC

Dimensions: 30" H x 12.2" W x 24.9" D
(76.2 cm H x 31 cm W x 63.3 cm D)

For current specification sheets and other information, go to www.bunn.com.

Related Products

Easy Clear® EQHP-10
Product No. : 39000.0004


Easy Clear® EQHP-10L
Product No. : 39000.0001

Easy Clear® EQHP-25
Product No. : 39000.0005

Easy Clear® EQHP-25L
Product No. : 39000.0002



3/16" Replacement tube kits
Product No. : 34727.1000



Scholle BIB connector
Product No. : 35057.0000



**LiquiBox QC/D II
BIB connector**
Product No. : 35055.0000

50ml Graduated Cylinder Kit
Product No. : 34843.1000
For use in calibration of pumps.



Model

LCA-2, IC

Agency Listing



Dimensions & Specifications

CANADA



Model	Product Number	Dispense Rate/Sec. 1.8 oz. (53.2 ml) 2.5 oz. (73.9 ml)*	Connector Type	Volts	Amps	Watts	Cubic ft ³ /m ³	Weight lbs/kg	Cord Attached
Product Ratios									





LCA-2, IC	37700.6000	45:1-100:1 65:1-100:1	Scholle 1910LX	120	2	240	9.8/.28	83 / 37.6	Yes
-----------	------------	--------------------------	----------------	-----	---	-----	---------	-----------	-----

*Unit shipped with dispense rate set at 1.8 oz./sec.

Power cord (NEMA 5-20P) 20 Amp-120V attached.

Electrical: 120V model requires 2-wires plus ground service rated 120V, single phase, 60 hz.

Plumbing: 20-90 psi (138-621 kPa) from a $\frac{3}{8}$ " (10 mm) or larger supply line. Unit requires a 2.2 gpm line flow capacity. A shut-off valve should be installed in the line before the unit. Install a regulator in line when pressure is greater than 90 psi to reduce pressure to 50 psi. Supplied with $\frac{3}{8}$ " (10 mm) male flare fitting.

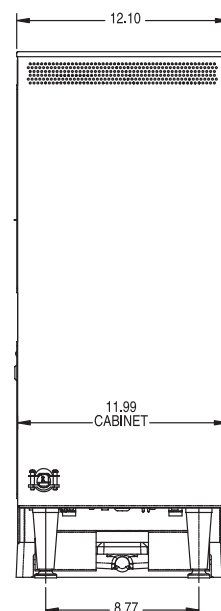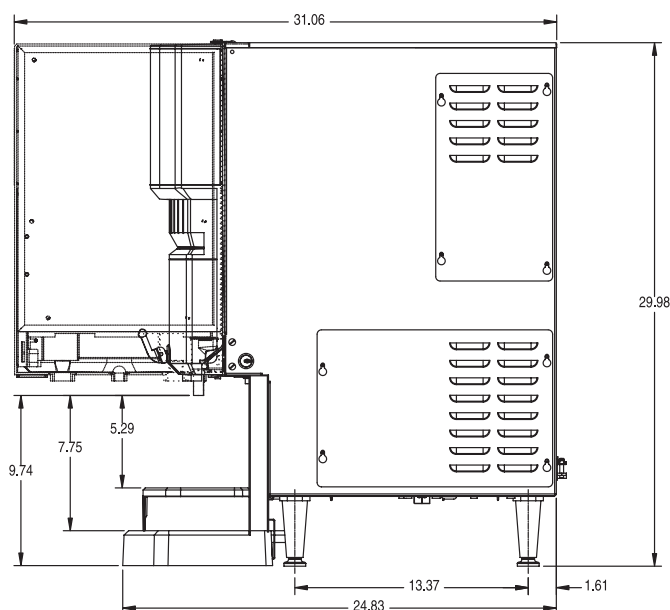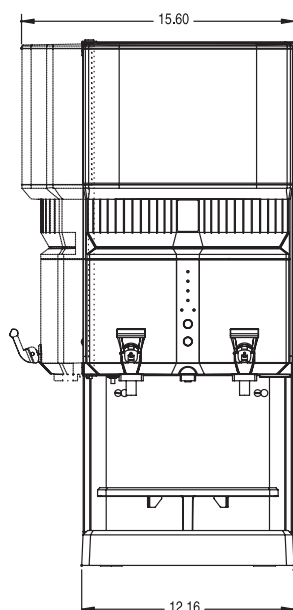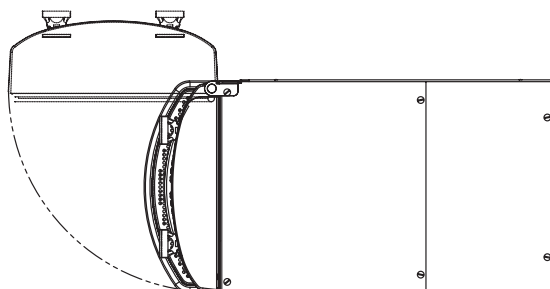

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.