# **BUNN**° INTERNATIONAL

# Iced Tea Brewer with Portable Server

ITEM#		
PROJECT		

DATE



### Features

#### **Iced Tea Brewer**

- Brews directly into most portable servers.
- Meet your volume needs; brew 3 gallons (11.4 litres) of iced tea at a time.
- SplashGard® funnel deflects hot liquids away from the hand.
- Quickbrew (Q) models available for shorter brew cycles.
- 100 volt model offers 1/2 batch option and two funnels.
- Brew capacity varies by model. See back for details.

# TB3Q with TD0-4 Dispenser

(TDO-4 sold separately)
Dimensions (29" trunk): 34" H x 11.6" W x 22.4"D
(86.4cm H x 29.5cm W x 58.4cm D)
Dimensions (25.75" trunk): 31" H x 11.6" W x 22.4" D
(78.7cm H x 29.5cm W x 58.4cm D)

For current specification sheets and other information, go to www.bunn.com.

International models may vary in appearance.

### Related Products

Easy Clear® EQHP-TEA Product No.: 39000.0007

Easy Clear® EQHP-TEACRTG Product No.: 39000.1007



**TDO-4 – Tea Dispenser** Product No.: 34100.0002



TDS-3.0 – Tea Dispenser Product No.: 33000.0000



**TD4T – Tea Dispenser** Product No.: 03250.0004



(BUNNO

Translucent Pouchpack Tea Funnel

Quick dispense, TU-3Q Product No.: 35282.0001 Standard dispense, TU-3 Product No.: 35282.0002



## Dimensions & Specifications


Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Shipping Weight	Cord Attached	Agency
TB3A	36700.0063	230	8	1680	1800	16.3 gal./hr.	43 lbs.	Yes	( <b>{ G</b>
29" (73.7cm)	trunk					(61.7 L/hr.)	(19.5 kg)		
TB3A	36700.0084	230	8	1680	1800	16.3 gal./hr.	43 lbs.	Yes	( <b>E GS</b>
25.75" (65.40	em) trunk					(61.7 L/hr.)	(19.5 kg)		
TB3QA	36700.0062	230	8	1680	1800	26.7 gal./hr.	42 lbs.	Yes	(E <b>GS</b>
25.75" (65.40	em) trunk					(101 L/hr.)	(19.1 kg)		
TB3B	36700.0046	100	17.2	1680	1718	16.3 gal./hr.	43 lbs.	No	
25.75" (65.40	em) trunk					(61.7 L/hr.)	(19.5 kg)		

Brewing capacity: based upon incoming water temp of 60°F/15°C (140°F/60°C rise) per 1.9 litre (1/2 gallon) brew time of 4 minutes.

Electrical: 230 volt models require 2-wires plus ground service rated at 220-240V, single phase, 50/60 Hz.

100 volt model requires 2-wires plus ground service, single phase, 50 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 1/4" OD male flare fitting.

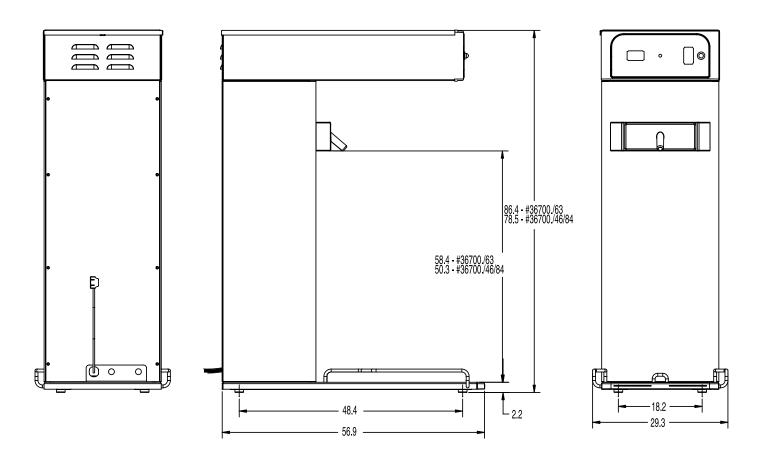

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com