# 

## **3 Gallon Iced Tea Brewer** with Portable Server

Model TB3Q with **TDO-4** Dispenser

Dimensions (29" trunk): 34" H x 11.6" W x 22"D (86.4cm H x 29.5cm W x 58.4cm D) Dimensions (25.75" trunk): 31" H x 11.6" W x 22" D (78.7cm H x 29.5cm W x 58.4cm D)

For current specification sheets and other information, go to www.bunn.com.

### Related Products

Easy Clear<sup>®</sup> EQHP-Tea Product No. : 39000.0007

Easy Clear® EQHP-TEACRTG **Replacement Cartridge** Product No. : 39000.1007

Single/Dual Filter Pack Product No. : 20100.0000 Packed per case: 500 Dimensions:  $5\frac{1}{4}$ " Base x  $3\frac{3}{4}$ " Sidewall 13.34 cm Base x 9.52 cm Sidewall



Product No. : 34100.0002 Capacity: 4 gal./15 L Weight: 13 lbs./5.9 kg Dimensions: 19" H x 10.7" W x 13.7" D 48.26 cm H x 27.18 cm W x 34.8 cm D

55.63 cm H x 22.86 cm W x 33.02 cm D

• Brews 16.3 to 23 gallons (61.7 to 87 litres) per hour from real tea leaves.

• Meet your volume needs; brew 3 gallons (11.36 litres) of iced tea at a time.

• TB3 has adjustable steep time for more control over flavor extraction.

TD4T – Tea Dispenser Product No. : 03250.6002 Capacity: 4 gal./15 L Weight: 14 lbs./ 6.35 kg Standard dispense, TU-3 Product No. : 35282.0002 21.9" H x 9" W x 13" D

48.3cm H x 24.9cm W x 32.5cm D **Translucent Pouchpack Tea Funnel** Quick dispense, TU-3Q Product No. : 35282.0001

TDS-3.0 – Tea Dispenser

Product No. : 33000.0000

Capacity: 3.0 gal./11.35 L

Weight: 9.4 lbs./4.26 kg

19"H x 9.8"W x 12.8"D

Dimensions:



#### Model

Agency Listing

Dimensions:

ITEM#

PROJECT

DATE

(TDO-4 sold separately)



Features

Iced Tea Brewer

· Brews directly into any style portable server.

· International electrical configurations available.

• Quickbrew (Q) models available for shorter brewing cycles. • SplashGard<sup>®</sup> funnel deflects hot liquids away from the hand.

#### **Patents Apply**


12/08**B1** 

TB3Q TB3

Dimensions & Specifications CANADA									
Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	Capacity per hour	<b>Cubic</b> ft <sup>3</sup> / m <sup>3</sup>	Weight Ibs/kg	Cord Attached
TB3Q w/TD4T	36700.6041	120	12	1400	1460	23 gal /87 liters	10 / .35	55 / 19	Yes <sup>†</sup>
<sup>†</sup> Power cord (NEMA 5-15P) 15 Amp-120V machine only.									

Electrical: Models require 2-wires plus ground service rated at 120V, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 1/4" OD male flare fitting.

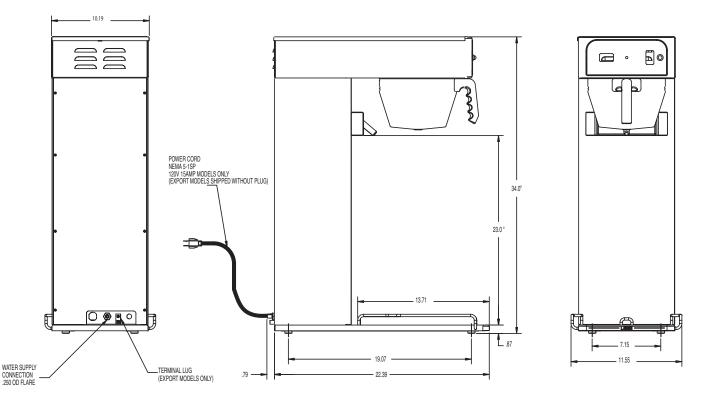

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com

BUNN<sup>®</sup> practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.