

## 5 Gallon Hot Water Machine

### Features

#### 5 Gallon Hot Water Machine

- Dispenses up to 18 gallons (68.14 liters) of boiling water (H5X) per hour for food prep and cleaning.
- Precise temperature (72°–212°F) (22.2°C–100°C) ensures consistent, high quality results.
- Locate hot water at preparation site to increase speed, safety and efficiency of kitchen staff.
- Prepare large amounts of mashed potatoes, gravy, cheese sauce, gelatin, oatmeal, & many more foods.
- International electrical configurations available.
- Available with 3" and 8" faucet extensions.



#### Model H5E/H5X\*

Dimensions: 28.5"H x 7.1"W x 17.5"D  
(72.4cm H x 18.03cm W x 44.5cm D)

For current specification sheets and other information, go to [www.bunn.com](http://www.bunn.com).

\* International models may vary in appearance.


### Related Products

#### Easy Clear® EQHP-10

Product No. : 39000.0004

#### Easy Clear® EQHP-10CRTG

Product No.: 39000.1004

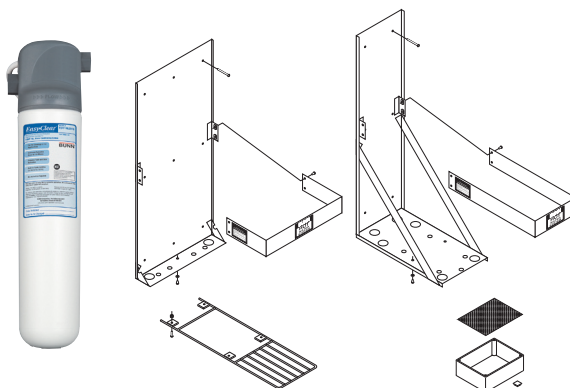

#### 1. Wall Mount Bracket (side)

Product No. : 12542.0000

Dimensions: 30" H x 13 1/2" W x 4 1/2" D  
76.2 cm H x 34.29 cm W x 11.43 cm D

#### 2. Wall Mount Bracket (front)

Product No. : 13125.0001

Dimensions: 30 1/2" H x 8 1/2" W x 15 1/4" D  
77.47 cm H x 21.59 cm W x 38.74 cm D

#### 3. Container Holding Shelf

Product No. : 12599.0000

Dimensions: 6 3/4" W x 21" D  
17.15 cm W x 53.34 cm D

#### 4. Drip Tray

Product No. : 02597.7998

#### Model

#### Agency Listing

H5E



H5X



## Dimensions & Specifications

**CANADA**




Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	°F/°C Settings	Capacity/Hr. cold water input 35°F/1.7°C	Capacity/Hr. hot water input 140°F/60°C	Cubic ft <sup>3</sup> /m <sup>3</sup>	Weight lbs/kg	Cord Attached
H5E-15-120	12500.6031	120	12.5	1500	1500	155-200/68.3-93.3	Varies with application		4.1 / .116	34 / 15.4	Yes*
H5E-15-120	12500.6000	120	12.5	1500	1500	85-115/29.4-46.1	Varies with application		4.1 / .116	34 / 15.4	Yes*
H5E-40-208	12500.6008	208	19.2	4000	4000	200/93.3	Varies with application		4.1 / .116	34 / 15.4	No
H5X-40-240	12500.6004	240	16.7	4000	4000	212/100	7.3gal/27.6 liter	14.7 gal/55.7 liter	4.1 / .116	34 / 15.4	No
H5X-40-208	12500.6002	208	19.2	4000	4000	212/100	7.3gal/27.6 liter	14.7gal/55.7 liter	4.1 / .116	34 / 15.4	No
H5X-15-120	12500.6001	120	12.5	1500	1500	212/100	3.7gal/14.0 liter	8.1gal/30.7 liter	4.1 / .116	34 / 15.4	Yes*
H5X-60-240	12500.6005	240	25.0	6000	6000	212/100	9.9gal/37.5 liter	18.6gal/70.5 liter	4.1 / .116	34 / 15.4	No
H5X-60-208	12500.6003	208	28.8	6000	6000	212/100	9.9gal/37.5 liter	18.6gal/70.5 liter	4.1 / .116	34 / 15.4	No

\*Power cord (NEMA 5-15P) 15 Amp-120V machine only.

Electrical: Models - 15 Models have attached cordset and require 2-wire grounded service rated 120V, single phase, 60 Hz. Other models require 2-wires plus ground service, single-phase. Supplied strain relief on rear side of machine.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 1/4" (6.3 mm) OD male flare fitting.

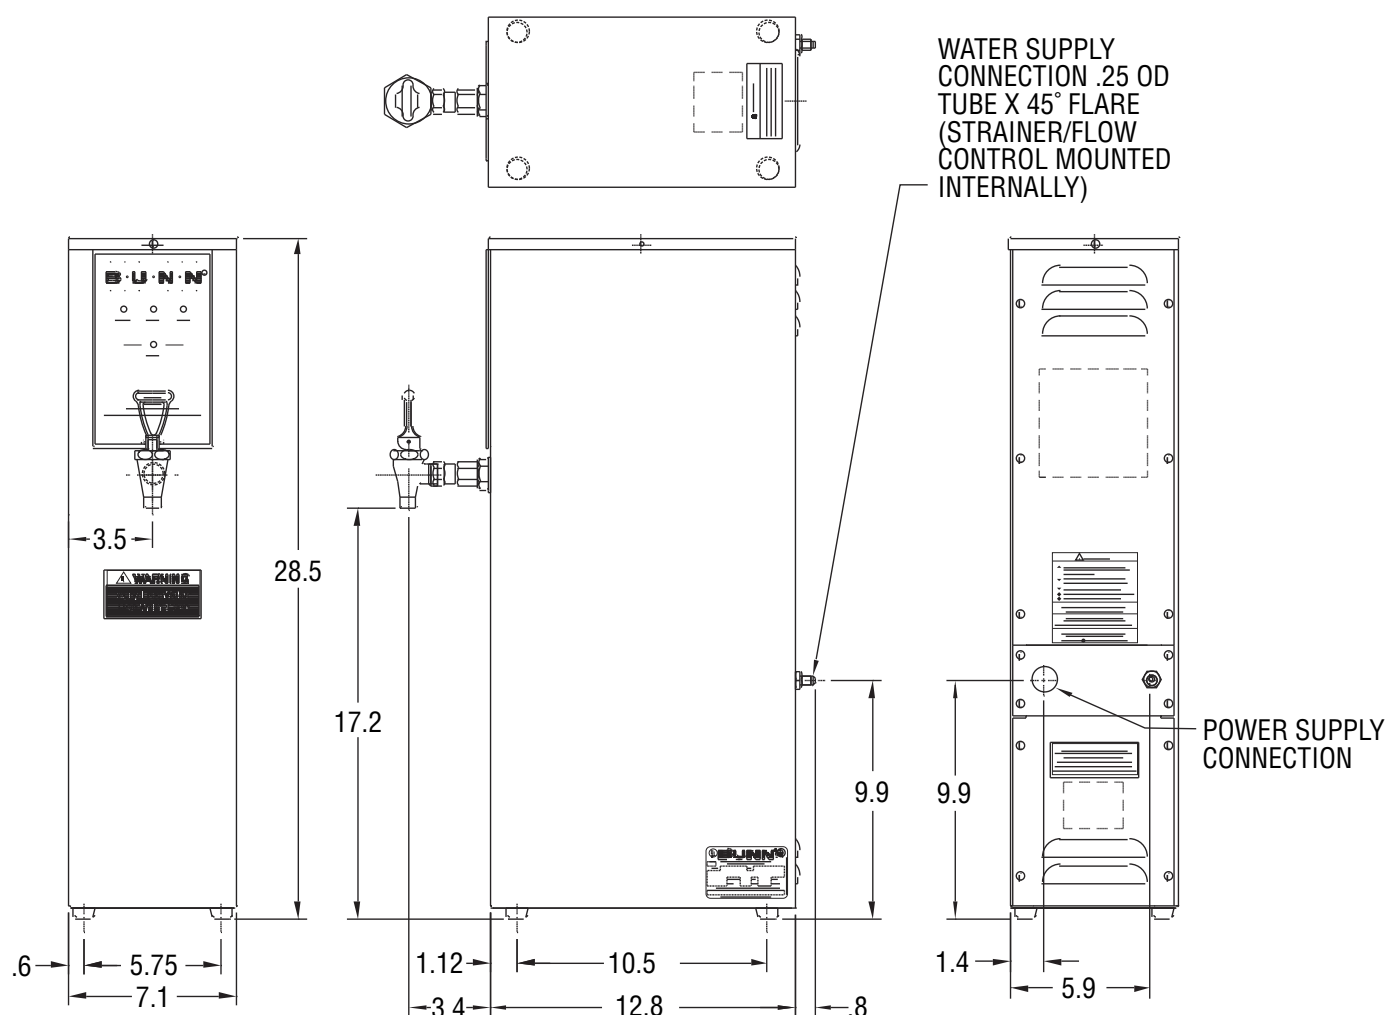

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • [www.bunn.com](http://www.bunn.com)

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.