

## 18.9 Litre (5 Gallon) Element Hot Water Dispenser

ITEM#

PROJECT

DATE



### H5E/H5X Element

Dimensions: 28.5"H x 7.1"W x 17.5"D  
(72.4cm H x 18.03cm W x 44.5cm D)

### Features

*Providing accuracy, adjustability, energy efficiency and styling to our quality line of hot water equipment*

- Digital thermostat provides consistent and accurate temperatures of 60°-212°F (15.6°-100°C).
- New contemporary, space-saving design.
- LED display provides simple temperature adjustment.
- Programmable "Energy Saver Mode" reduces operating cost during idle periods.
- Thinsulate<sup>®</sup> tank insulation provides over increased energy efficiency.
- The perfect tool for added control over quality coffee and tea.


For current specification sheets and other information, go to [www.bunn.com](http://www.bunn.com).

*\*International models may vary in appearance.*

### Related Products

**Easy Clear<sup>®</sup> EQHP-10**  
Product No. : 39000.0004

**Easy Clear<sup>®</sup> EQHP-10L**  
Product No. : 39000.0001

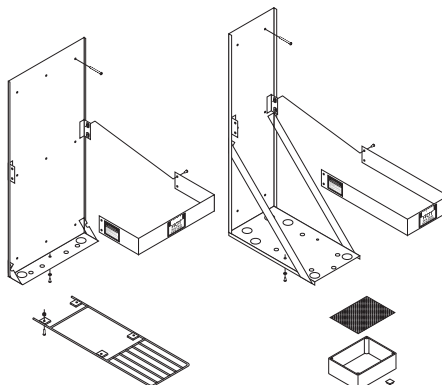

- 1. Wall Mount Bracket (side)**  
Product No. : 12542.0000  
Dimensions: 30" H x 13 1/2" W x 4 1/2" D  
76.2 cm H x 34.29 cm W x 11.43 cm D
- 2. Wall Mount Bracket (front)**  
Product No. : 13125.0001  
Dimensions: 30 1/2" H x 8 1/2" W x 15 1/4" D  
77.47 cm H x 21.59 cm W x 38.74 cm D
- 3. Container Holding Shelf**  
Product No. : 12599.0000  
Dimensions: 6 3/4" W x 21" D  
17.15 cm W x 53.34 cm D
- 4. Drip Tray**  
Product No. : 02497.0000

## Dimensions & Specifications





Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Temp Settings	Gal./Hr. cold water input 35°F (1.6°C)	Gal./Hr. hot water input 140°F (60°C)	Shipping Weight	Cord Attached	Agency
H5E Element	43600.0012	230	16	3670	3700	200°F 93.3°C	9.1 gal (39.4 L)	25 gal. (94.6 L)	32 lbs. (14.5 kg)	No	CE
H5X Element	43600.0013	230	16	3670	3700	212°F 100°C	9.1 gal (39.4 L)	25 gal. (94.6 L)	32 lbs. (14.5 kg)	No	CE

Electrical: Model requires 2-wires plus ground service, rated 220-240V, single-phase, 50/60Hz.

Supplied strain relief on rear side of machine.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 1/4" OD male flare fitting.

Tank capacity: 5 gallons (18.9 litres).

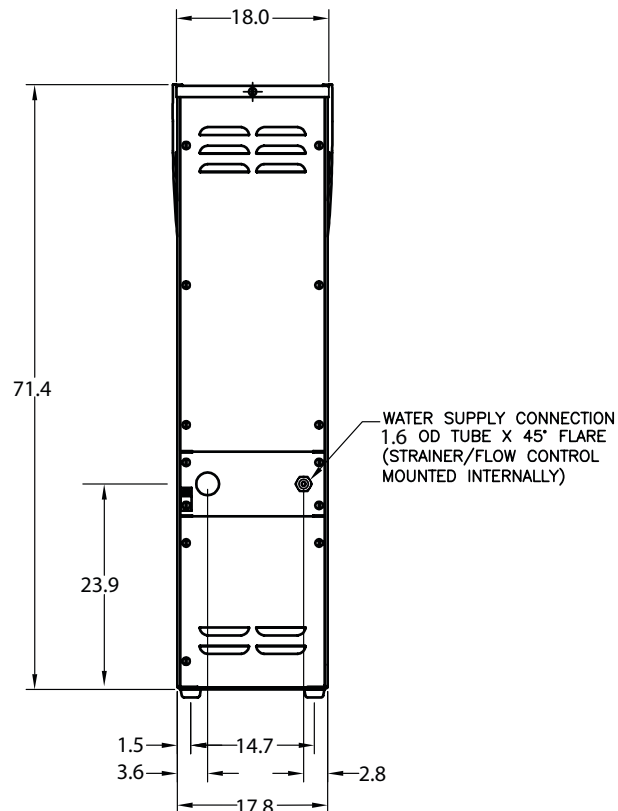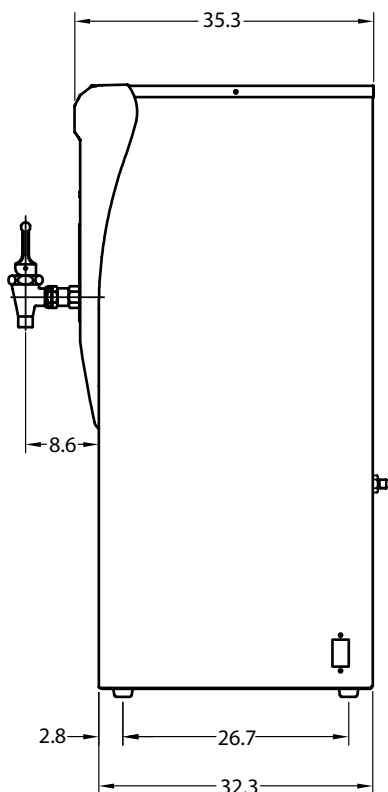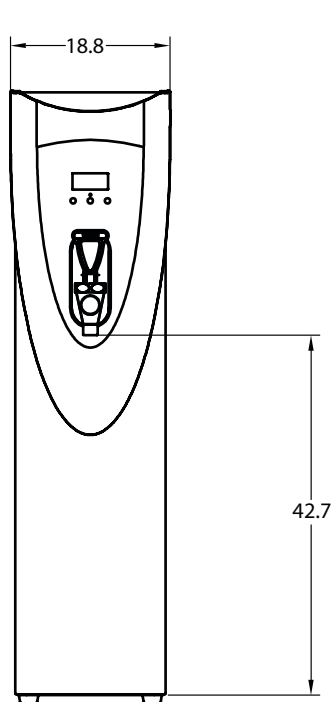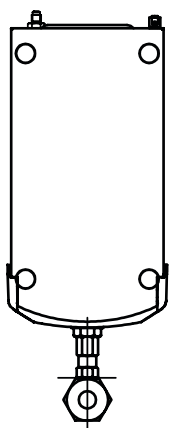

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • [www.bunn.com](http://www.bunn.com)

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.