

Champion®

The Dishwashing Machine Specialists

Project _____
Item No. _____
Quantity _____

STANDARD FEATURES

- Dual-pawl cradle drive system
- One-piece cast stainless steel upper & lower spray arm assemblies
- Internal removable scrap baskets and two-piece scrap screens
- Standard vertical opening accommodates 18" x 26" sheet pans
- Wide 26" leakproof doors, internally-fitted
- Anti-jam conveyor drive system
- Energy Sentinel (Idle pump shut-off)
- Convenient top-mounted controls
- Automatic tank fill
- Common utility connections
- Door safety switch
- Door activated drain closure
- Enclosure panels (front and sides)
- Splash shields
- Low-water tank heat protection
- Rinse-saver device
- Stainless steel heavy-gauge construction, including base and feet
- Electric tank heat
- Prewash pump 1 Hp motor
- External prewash scrap basket
- Wash pump 2 Hp motor
- Stainless steel pump and impeller
- Single-point electric connection

MODEL 80 HDPW

44" Single Tank with 36" Heavy Duty Prewash
High-Temperature
Rack Conveyor Dishwashing Machine



Shown with Vent Cowl
and Damper Option

SPECIFIER STATEMENT

Specified unit will be Champion Model 80 HDPW high temperature rack conveyor dishwashing machine with 36" prewash. Constructed of Type 304 stainless steel and measuring 80" long with 20-3/4" vertical opening. Features top mounted control cabinet; upper and lower one-piece stainless steel spray arm assemblies, removable internal scrap basket with two-piece scrap screen. Large 26" access doors with front access and double-hook safety latch. Anti-jam conveyor drive system. 1 year parts and labor warranty.



2674 N. Service Road,
Jordan Station, Ontario, Canada L0R 1S0
Tel: 800/263-5798 Fax: 905/562-4618

E-SERIES

Champion Industries, Inc.
P. O. Box 4149, Winston-Salem, NC 27115
Tel: 800/532-8591 Fax: 336/661-1979
www.championindustries.com

Champion®

The Dishwashing Machine Specialists


MODEL 80 HDPW

44" Single Tank with 36" Heavy Duty Prewash
High-Temperature
Rack Conveyor Dishwashing Machine

EFFICIENT NEW SPRAY SYSTEM DESIGN

To make the E-Series more efficient and more forgiving we designed a new spray arm system that includes:

- Wall-of-water spray pattern via stainless steel fluted directional spray jets for quick and efficient washing
- Easily removable spray arm assembly for ease of cleaning
- Stainless steel pump housing and impeller
- Larger tanks hold more water for better washing results

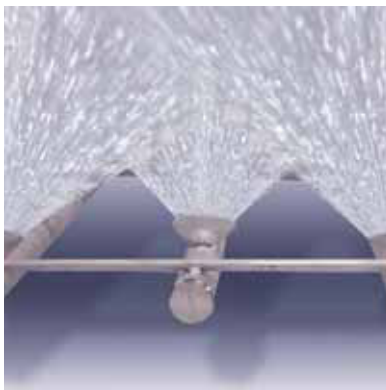

Wall-of-Water Spray Pattern



One-Piece Cast Stainless Steel Spray Assembly

INTEGRATED BOOSTER HEATER

As well as the E-Series performs, we created a way to make it perform even better. The electric booster heater may be optional, but it is an exceptional value — engineered within the E-Series footprint to offer a variety of advantages over other booster designs, such as:

- Inter-plumbed and inter-wired
- One control shuts off washer and booster
- 27 kW for 40°F rise
- 48 kW for 70°F rise (external)
- Conductive heat transfer to wash tank
- Stainless steel booster heater lasts the life of the machine
- Integrated design saves floor space



Large Heating Element



Stainless Steel Built-in Nested Booster



Two-Piece Scrap Screen




Built-in Scrap Basket

E-SERIES


MODEL 80 HDPW

44" Single Tank with 36" Heavy Duty Prewash
High-Temperature
Rack Conveyor Dishwashing Machine

Champion®
The Dishwashing Machine Specialists

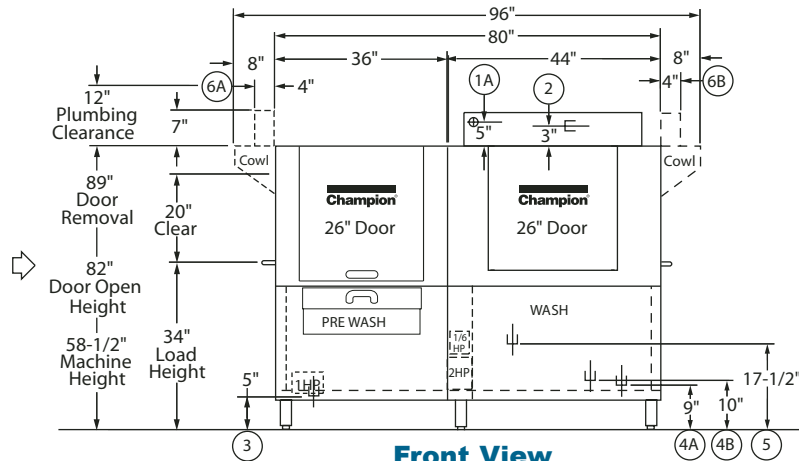


**Front View
Without Booster**

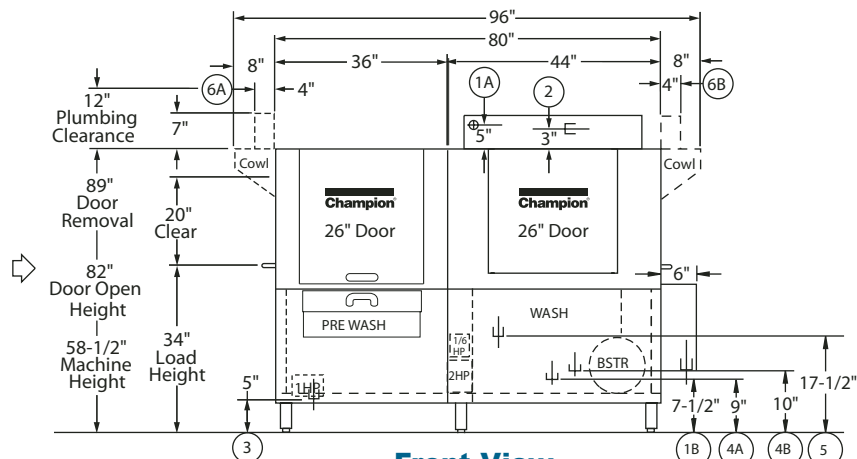


**Front View
With Booster**


Left-to-Right Operation

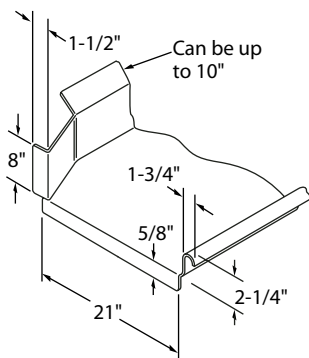

**Suggested Table
Construction**

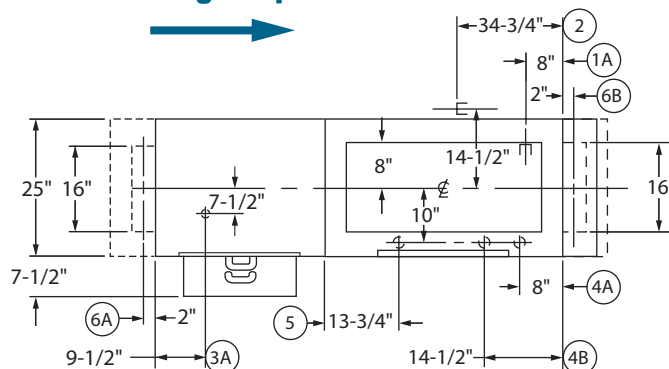

Plan View





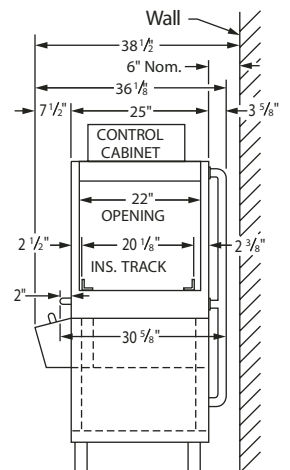


End View

MODEL 80 HDPW

44" Single Tank with 36" Heavy Duty Prewash
High-Temperature
Rack Conveyor Dishwashing Machine

Champion®
The Dishwashing Machine Specialists

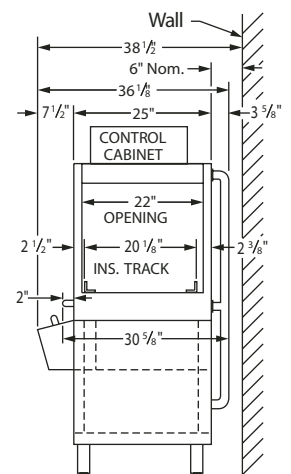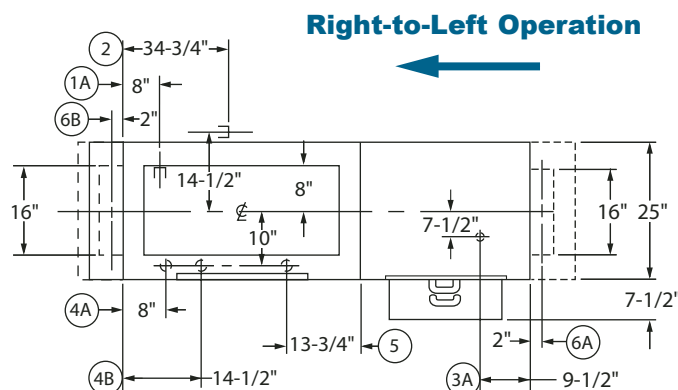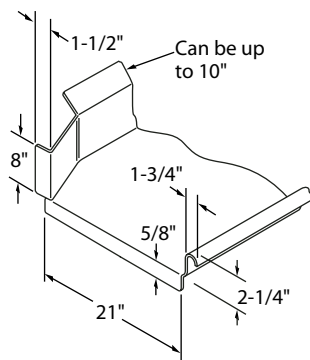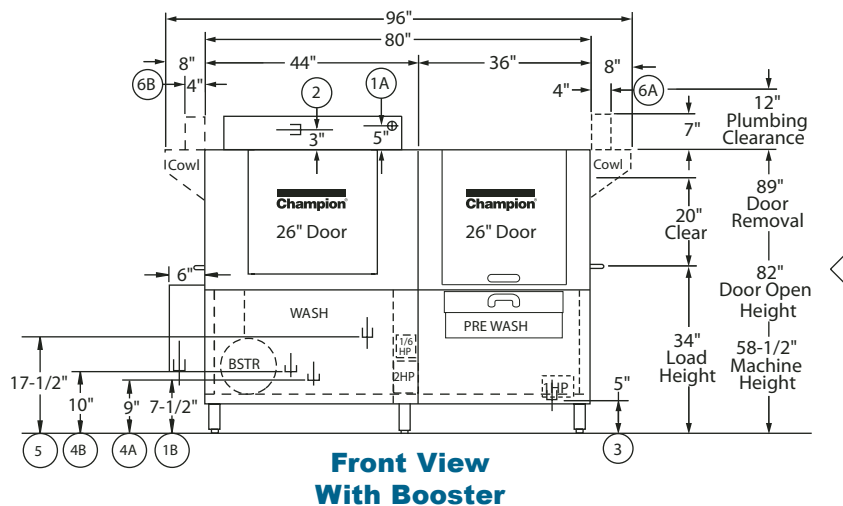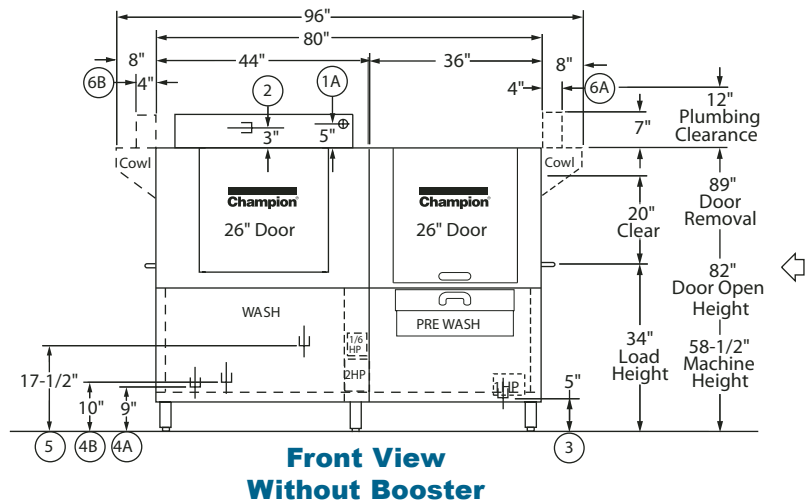

MODEL 80 HDPW

Champion®
The Dishwashing Machine Specialists

44" Single Tank with 36" Heavy Duty Prewash
High-Temperature
Rack Conveyor Dishwashing Machine

Volume crated: 156 cu. ft.
Shipping weight crated: 900 lbs.

Dimensions shown in inches

Utilities

1	Electrical A Machine connection (see Table A) B Booster connection (see Table B)
2	Hot Water 3/4" NPT 180°F/82°C min. hot water connection. (Machine without booster.) 3/4" NPT 140°F/60°C min. hot water connection. (40°F/22°C rise booster) 3/4" NPT 120°F/49°C min. hot water connection. (60°F/34°C rise booster) 3/4" NPT 110°F/49°C min. hot water connection. (70°F/39°C rise booster) Flow pressure 20-22 psi.
3	Drain 1-1/2" NPT machine connection. Maximum flow 15 gpm.
4	Steam A 3/4" NPT machine connection. Flow pressure 15-30 PSI. (Steam coil) B 3/4" NPT machine connection. Flow pressure 15-30 PSI. (Steam injector)
5	Condensate (no back pressure) 1/2" NPT machine return to boiler
6	Vents A Load end: 200 CFM @ 1/4" S.P. B Unload end: 400 CFM @ 1/4" S.P. (With blower-dryer increase room ventilation by 600 CFM.)

TABLE A - MACHINE CONNECTION

Machine only			
Elec. Specs.	Rated Amps	Minimum Supply Ckt. Conductor Ampacity	Maximum Overcurrent Protective Device
208/60/1	103	125	125
240/60/1	90	110	110
208/60/3	58	70	70
240/60/3	50	60	60
480/60/3	25	35	35
575/60/3	19	25	25

TABLE B - BOOSTER CONNECTION

40°F/22°C Rise – 27kW Electric built-in booster			
Elec. Specs.	Rated Amps	Minimum Supply Ckt. Conductor Ampacity	Maximum Overcurrent Protective Device
208/60/3	75	100	100
240/60/3	65	80	80
480/60/3	32	40	40
575/60/3	27	35	35

70°F/39°C Rise – 48kW Electric built-in booster			
Elec. Specs.	Rated Amps	Minimum Supply Ckt. Conductor Ampacity	Maximum Overcurrent Protective Device
208/60/3	133	175	175
240/60/3	115	150	150
480/60/3	58	80	80
575/60/3	48	60	60

Machine and steam built-in booster			
Elec. Specs.	Rated Amps	Minimum Supply Ckt. Conductor Ampacity	Maximum Overcurrent Protective Device
208/60/1	25	35	35
240/60/1	22	30	30
208/60/3	13	20	20
240/60/3	11	20	20
480/60/3	6	15	15
575/60/3	5	15	15

SPECIFICATIONS

Capacity
Racks per hr. (NSF rated) 208
Wash tank (US gal.) 21
Conveyor speed (ft./min.) 5.8

Motor Horsepower
Drive 1/6
Prewash 1
Wash 2

Water Consumption
US Gal. per hr. (max. use) 234
US Gal. per rack 1.12

Heating
Tank Heat, electric (kW) 15
Tank heat, steam (lbs./hr. required at 15 PSI flow pressure) 75
Electric booster (built-in) (kW supplied for 40°F rise) 27
(kW supplied for 60°F rise) 36
Electric booster (kW supplied for 70°F rise) 48
Steam booster (lbs./hr. required for 40°F rise) 120
Steam booster (lbs./hr. required for 70°F rise) 205

Venting
Load end (minimum CFM) 200
Unload end (minimum CFM) 400

Standard 20" x 20" rack complement
Peg 2
Flat 1

Warning: Plumbing and electrical connections should be made by qualified personnel who will observe all the applicable plumbing, sanitary, safety codes and the National Electrical Code.

Note: Water Hammer Arrestor (meeting ASSE-1010 standard or equivalent) to be supplied (by others) in common water supply line at service connection.

Plumbing Notes: Because of the variation in house-supplied steam and water pressures, steam and water pressure regulating valves (PRVs) may be needed. (Water PRV is standard on machines with booster.) The PRVs can either be purchased from Champion or obtained locally.

Venting Notes: Fabricated duct size: 3-7/8" x 15-7/8" (Outside dimensions)

Due to an ongoing value analysis program at Champion, specifications contained in this catalog are subject to change without notice.

Champion Industries, Inc., P. O. Box 4149, Winston-Salem, NC 27115 • 800/532-8591 • Fax: 336/661-1979 • www.championindustries.com

MODEL 80 HDPW

44" Single Tank with 36" Heavy Duty Prewash
High-Temperature
Rack Conveyor Dishwashing Machine

Champion®

The Dishwashing Machine Specialists

OPTIONS & ACCESSORIES

- ☐ Tank heat: choice of steam coil, steam injector, hot water coil
- ☐ Blower-dryer with 60" hood, table, legs and pawl bar assembly
- Booster Heaters
(completely interplumbed, controls are interwired)
 - ☐ Steam: 40°F - 70°F rise
 - ☐ Electric: 27 kW (40°F rise) (built-in 3 phase only)
 - ☐ Electric: 48 kW (External 70°F rise) (3 phase only)
- ☐ Cantilever sideloader (with or without hood) for 90° load operation
- ☐ Extended pawl bar (extended drive unit) for use with load tabling
- ☐ 90° Motorized rack advance conveyor (unload)
- ☐ 180° Motorized rack advance conveyor (unload)
- ☐ Racks: peg or flat racks (specify type)
- ☐ Roller conveyor table (mobile or stationary)
- ☐ Steam pressure regulating valve (unmounted)
- ☐ Table limit switch, unmounted (recommended on all rack conveyor installations)
- ☐ Vent cowl, stainless steel with 7" stack and locking damper
- ☐ Extended Vent hood, stainless steel with 7" stack and locking damper
- ☐ Water pressure regulating valve (unmounted) (standard with booster)
- ☐ Vent fan control
- ☐ Water hammer kit
- ☐ Drain temp kit
- ☐ Vertical clearance through machine: 24" (instead of standard 20-3/4") for large ware

Model MRC 180
180° Motorized
Rack Curve
(Must be ordered with
Roller Conveyor Table)



Model MRC 90
90° Motorized
Rack Curve
(Must be ordered with
Roller Conveyor Table)



Cantilever
Sideloader
(No hood)

Model RCT 64
or RCT 84
Roller
Conveyor Table

