



# 18600BUCM

Self-Contained Refrigerated Work Tables

Project \_\_\_\_\_  
Item \_\_\_\_\_  
Quantity \_\_\_\_\_  
CSI Section 11400  
Approved \_\_\_\_\_  
Date \_\_\_\_\_

18600BUCM:

Self-Contained Refrigerated Work Tables

## Models

- 18648BUCM 48" refrigerated work table
- 18660BUCM 60" refrigerated work table
- 18672BUCM 72" refrigerated work table
- 18691BUCM 91" refrigerated work table
- 18699BUCM 99" refrigerated work table
- 186114BUCM 114" refrigerated work table



18648BUCM


## Standard Features

- Stainless steel exterior is standard
- Compressor is located on right
- Finished stainless steel ends
- Stainless steel top
- Environmentally friendly HFC-404A refrigerant
- Standard on casters
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low
- One year parts 90 day labor standard warranty


## Options & Accessories

- Stainless steel back
- Laminate facing (full front)
- Laminate end
- Laminate back
- Tray racks
- Cutting board (20" wide x .5" thick)
- Legs, set of four or six
- 18" deep single tier stainless steel overshell
- Refrigerated drawers, (2 or 3 high) 19", 24", 27" or 32" wide
- Lock
- 230V/50 cycle electrical system
- Additional shelf (specify door size)
- Remote refrigeration


## Elevation Views & Door Clearances




**Elevation View  
18648BUCM**

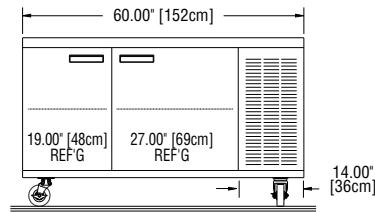


**Elevation View  
18660BUCM**

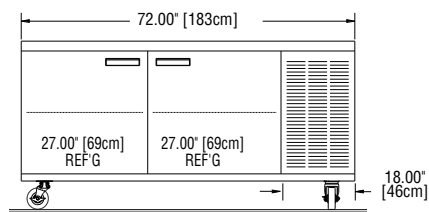


**Elevation View  
18672BUCM**

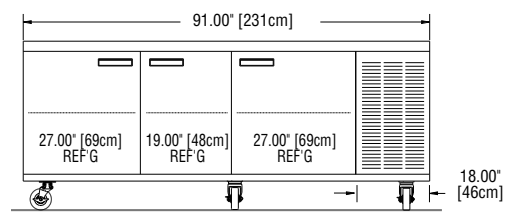


**Elevation View  
18691BUCM**

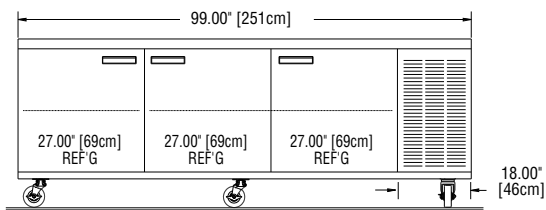


**Elevation View  
18699BUCM**

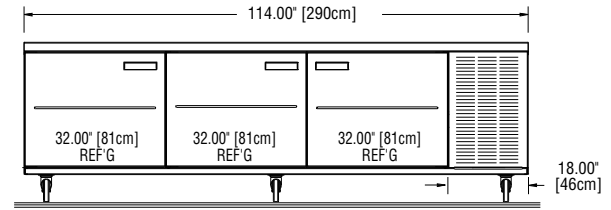


**Elevation View  
186114BUCM**




**19.00" [48cm]  
Door**



**24.00" [61cm]  
Door**



**27.00" [69cm]  
Door**

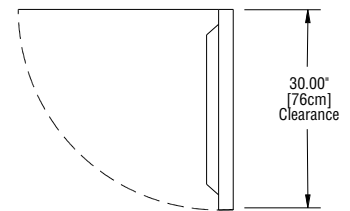


**32.00" [81cm]  
Door**

NOTE: Unobstructed airflow must be maintained to insure unit performance and maintain warranty

## All Models Plan View



## All Models End View

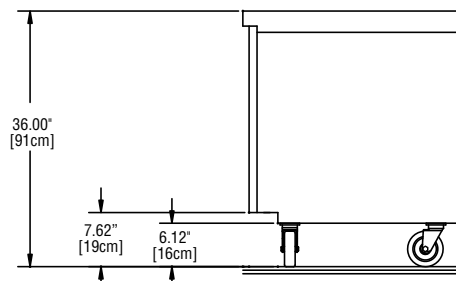

## 18600BUCM

### Specifications

Model	Number of Doors	Shelf Area	Storage Capacity	BTU Load	BTU Capacity	H.P.	Volts/Hertz/Phase	Amps	Nema Plug	Ship Weight LBS/KG
18648BUCM	(1) 27"	3.95ft <sup>2</sup>	10.23ft <sup>3</sup>	475	1462	1/5	115/60/1	8.0	5-15P	390/177
18660BUCM	(1) 19" & (1) 27"	6.51ft <sup>2</sup>	15.12ft <sup>3</sup>	686	1462	1/5	115/60/1	8.0	5-15P	435/197
18672BUCM	(2) 27"	7.90ft <sup>2</sup>	18.10ft <sup>3</sup>	856	2261	1/4	115/60/1	10.0	5-15P	495/225
18691BUCM	(2) 27" & (1) 19"	10.29ft <sup>2</sup>	24.48ft <sup>3</sup>	1169	2261	1/4	115/60/1	10.0	5-15P	535/243
18699BUCM	(3) 27"	11.85ft <sup>2</sup>	27.46ft <sup>3</sup>	1220	2261	1/4	115/60/1	10.0	5-15P	594/269
186114BUCM	(3) 32"	14.42ft <sup>2</sup>	37.24ft <sup>3</sup>	1373	2591	1/3	115/60/1	12.0	5-15P	685/310

Delfield reserves the right to make changes to the design or specifications without prior notice.



# 18600BUKM

## Self-Contained Refrigerated Work Tables

### Specifications

**Exterior** top is constructed of heavy duty stainless steel, with integral 2.12" (5cm) high square nosing at the front. Top is insulated with high-density insulation. Exterior back and bottom are galvanized steel. Exterior ends are finished with stainless steel.

**Interior** base has stainless steel back and bottom. Interior ends and door frames are thermoformed ABS plastic. Base is insulated with high-density foamed-in-place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane. Each interior door section has (1) removable epoxy-coated wire shelf.

**Door(s)** have stainless steel exterior front, with a thermoformed ABS plastic interior liner. Black recessed handle(s) and a snap-in magnetic gasket which is readily replaceable.

**Base** has a machine compartment, standard on right, with a condensing unit with condensate evaporator and an electrical junction box installed. Machine compartment has a removable louver for access to condensing unit. Blower coil(s) with expansion valve are located behind the door mullions.

**Refrigeration system** uses HFC-404A refrigerant, and will maintain 36°F (2°C) to 40°F (4°C) interior cabinet temperature.

**Electrical connections** are 115 volts, 60 Hertz, single phase. Unit has a 8' (2.4m) long cord and plug.

**Casters:** Unit is mounted on 5" (13cm) diameter casters; overall height of casters is 6.13" (16cm).

