



PROJECT	
ITEM #	
QUANTITY	DATE
APPROVAL	

F17C

Self-Contained Refrigerated Base Equipment Stands


Long Form Specifications

Top is constructed of 18-gauge stainless steel, with integral front marine edge nosing and rear backsplash. Spline bars made of 12-gauge stainless steel and run front to back on both the left and right stainless steel sides for support and spline purposes. Interior sub-top made of 22 gauge 2BF stainless steel is made integral with the top by injecting 2.00" of high density polyurethane foam between the exterior and interior tops. As a standard, 14-gauge cutting board brackets are attached to each side and house a 1.25" thick x 9.5" deep maple cutting board.

Refrigerated base interior back and bottom is constructed of 22-gauge 2BF stainless steel. Exterior sides are constructed of 18-gauge stainless steel. Bottom and back are made of 22 gauge galvanized steel. Both left and right interior sides are formed of ABS plastic. The base is injected with 2.00" of high density polyurethane foam between the exterior and interior. Refrigerated base fronts are made of .095" thick ABS thermoformed plastic and backed up by ridged polyurethane water blown injection molded frames. The frames are an excellent thermo-break and superior structural material for fastening doors and drawers. Exterior machine compartment side is constructed of 18-gauge galvanized steel.

Single units are supplied with wall-mounted bracket and threaded rod to allow installation of the unit against a solid surface. Units shipped, as part of a line-up do not come standard with a wall mounted bracket assembly.

Full Extension Plus drawer system is a complete drawer system, which can operate independent of the unit it's installed in. Drawer system is sized to hold 12 x 20 x 4 " deep hotel pans and smaller fractional pans. Drawer system is all stainless steel construction for maximum durability. Outer drawer track is made of 11-gauge stainless and held in place with 12-gauge up-right and cross supports. Drawer track rollers are made of Delrin™ 100 NC-10 and do not require grease for operation. Intermediate tracks are removable without tools and house Delfield's "anti-friction binary roller system". Drawer boxes are designed with "easy pan grip flanges". Tracks are designed with a stay shut feature that holds the drawer gasket tight to the base front on uneven floors. Exterior drawer fronts are made of 22- gauge stainless steel; and an interior made of ABS plastic with formed in channels to house the snap-in dart style santoprene gasket. A 12-gauge galvanized brace is foamed in place to be an integral part of the drawer front assembly. Each drawer front is injected with 1.87" of high density polyurethane foam between the exterior and interior. Handles are recessed black plastic and held in with a positive lock system.

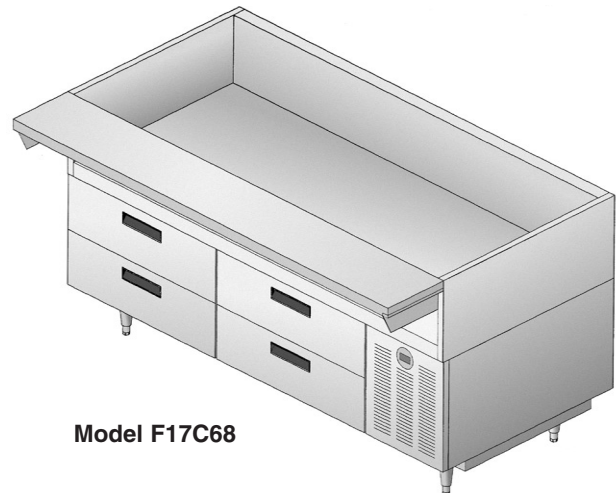

Model F17C68

Unit is supported with two 14-gauge leg rails that run the entire length of the unit. Leg rails are welded to the bottom side of the unit and are tied together with two 12-gauge braces running front to back. Caster/leg boxes are welded inside the leg rail and 6.12" adjustable stainless steel legs are mounted as standard with (4) 5/16" bolts.

Self-contained models have a pre-wired condensing unit and a digital thermometer installed in the machine compartments (standard on right) louver panel and supplied with an 8' cord and plug. Interior refrigerated base cabinet will maintain 36 to 40 degree temperatures at 100-degree ambient room temperature.

Refrigeration system components are HFC-404A. Interior cabinet is cooled with mullion style blower coils (coated) mounted between each door/drawer section for even air and temperature control. Electrical connections are 115V-60H-1PH.


Optional Accessories and Modifications

- 505B Stainless steel back
 - 906A Stainless steel end
 - 505F Laminate facing (drawers only)
 - 905A Laminate back
 - 906E Laminate end
 - 1027A Casters
 - 104 Doors, except 32"
 - 108 Locks
 - 213 *220V/50 cycle electrical
- *Inclusion of this option will alter electrical specifications.




Delfield's
MARK7


Self-Contained Refrigerated Base Equipment Stands




**ELEVATION VIEW
F17C52**




**ELEVATION VIEW
F17C60**




**ELEVATION VIEW
F17C68**

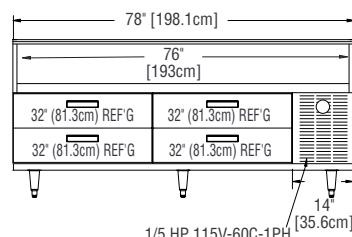


**ELEVATION VIEW
F17C78**

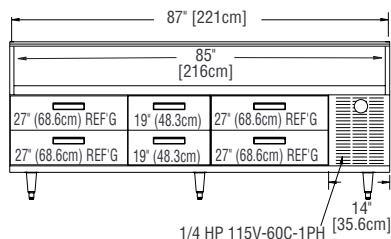


**ELEVATION VIEW
F17C87**

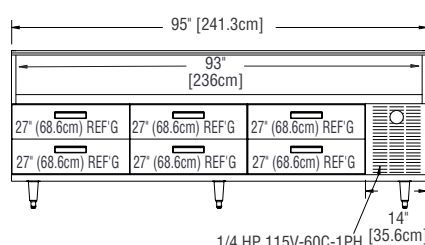

**ELEVATION VIEW
F17C95**

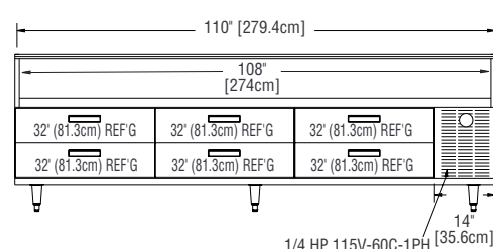


**ELEVATION VIEW
F17C110**

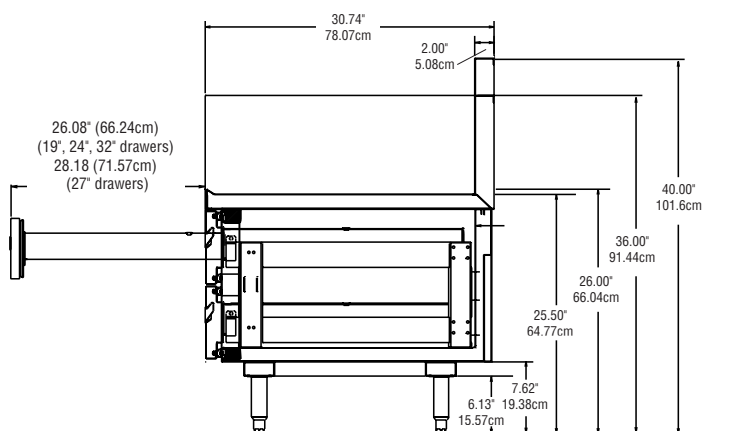


**END VIEW
ALL MODELS**

**END VIEW
ALL MODELS**

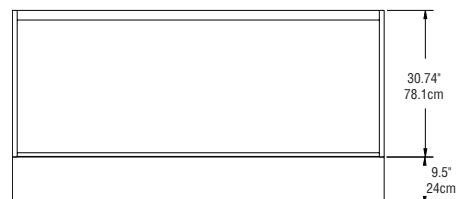

MECHANICAL ACCESS



C = CONDENSING UNIT
J = JUNCTION BOX
W/8FT (2.4M) CORD
AND PLUG

Mechanical Data—Standard Unit

MODEL NUMBER	NUMBER OF DRAWERS	PAN* CAPACITY	H.P.	VOLTS, HERTZ PHASE	AMPS	BTU DESIGN LOAD	BTU SYSTEM CAPACITY	SHIP WEIGHT
F17C52	(2) 32"	4	1/5	115/60/1	8.0	452	1727	410 lbs/ 186 kg
F17C60	(2) 19" & (2) 27"	6	1/5	115/60/1	8.0	556	1727	460 lbs/ 208 kg
F17C68	(4) 27"	8	1/5	115/60/1	8.0	632	1727	500 lbs/ 227 kg
F17C78	(4) 32"	8	1/5	115/60/1	8.0	726	1727	580 lbs/ 263 kg
F17C87	(2) 19" & (4) 27"	10	1/4	115/60/1	10.0	868	2341	625 lbs/ 283 kg
F17C95	(6) 27"	12	1/4	115/60/1	10.0	1001	2341	700 lbs/ 317 kg
F17C110	(6) 32"	12	1/4	115/60/1	10.0	1143	2341	750 lbs/ 340 kg

*12" x 20" x 4" deep pans not included. 5-15P NEMA plug used on all lengths.