



PROJECT	
ITEM #	
QUANTITY	DATE
APPROVAL	

F18MR

31.5" (80cm) Deep Reomte Mega Top Salad Tables

Short Form Specifications

Exterior Top is constructed of one piece 16-gauge stainless steel, with integral 2.12" (5.4cm) square nosing on front and 4" (10.2cm) high by 2" (5.1cm) thick backsplash on rear. Top has opening for use with 1/6 size pans. Pans and adapter bars supplied by others. Pans are recessed 3" (7.6cm) or 2" (5.1cm) and rest on adjustable pan supports. Opening is supplied with removable 20-gauge stainless steel cover. Temperature in top opening maintains 33°F (1°C) to 41°F (5°C), with pans recessed 3" (7.6cm), at 86°F ambient room temperature, meeting NSF7 requirements.

Exterior back and bottom of base are constructed of 24-gauge galvanized steel. Exterior ends are constructed of 18-gauge stainless steel.

Base interior has a 22-gauge stainless steel back and bottom. Interior ends and door frames are formed of ABS plastic. Base is insulated with a minimum of 1.50" (3.8cm) foamed in place high density polyurethane.

Door(s) are constructed with ABS plastic interior liner and 22-gauge stainless steel exterior front. Door(s) have a black recessed handle and a snap in magnetic gasket which is easily replaceable.

Base is furnished with a blower coil especially made to fit behind door mullion. Blower coil housing encloses refrigeration lines, evaporator coil, expansion valve and fans. Unit is designed to maintain 36°F (2°C) to 40°F (4°C) in the base.

Unit is mounted on 6.13" (15.6cm) high adjustable stainless steel legs.

Electrical connections are 115 volt, 60 Hertz, single phase. Unit must be hard wired.

Refrigeration System Component — HFC-404A.



Model F18MR44D


Optional Accessories & Modifications

- 906A** Stainless steel end
- 505H** Stainless steel back
- 505F** Laminate facing (full front)
- 906E** Laminate end
- 905A** Laminate back
- 1030A** Cutting board (Salalite or composite)
- 109** Condensate evaporator (1 per coil) for base
- 107F** Tray rack
- 102** Drawers
 - A-(2) 19" in lieu of one door
 - B-(2) 27" in lieu of one door
 - C-(2) 32" in lieu of one door
- 108** Locks
- 120F** Cold pan drain
- 213** *220V/50 cycle


*Inclusion of this option will alter the electrical specifications of the unit




Delfield's
MARK7
modular equipment

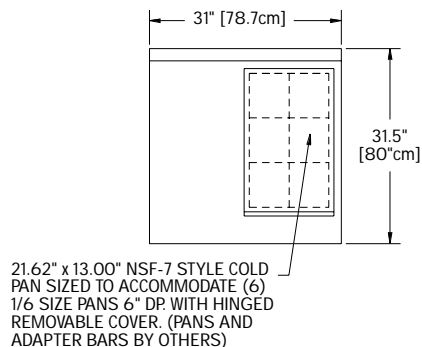


PLAN VIEW
F18MR31A

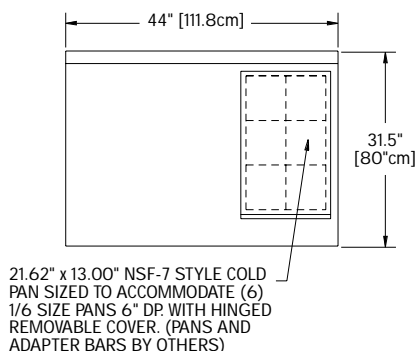


PLAN VIEW
F18MR44A

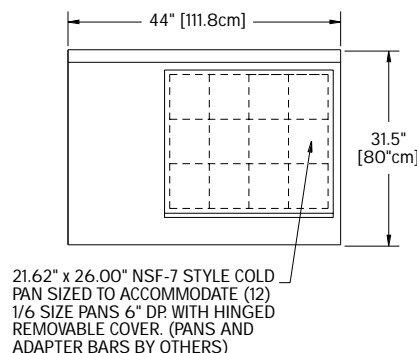


PLAN VIEW
F18MR44D

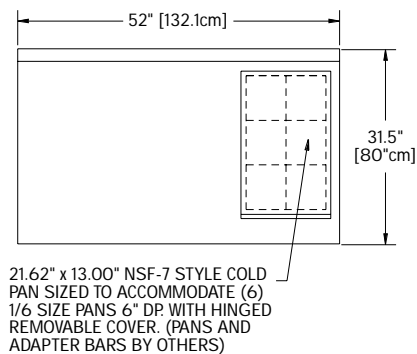


PLAN VIEW
F18MR52A

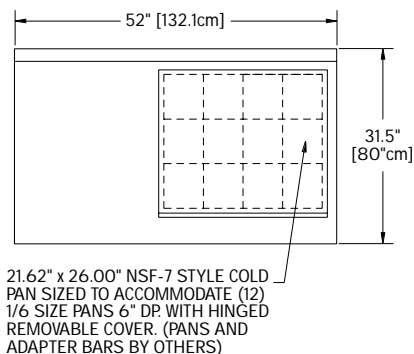

PLAN VIEW
F18MR52D

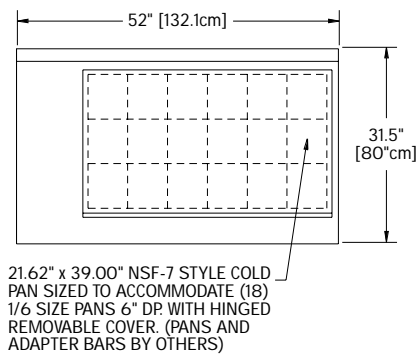


PLAN VIEW
F18MR52E

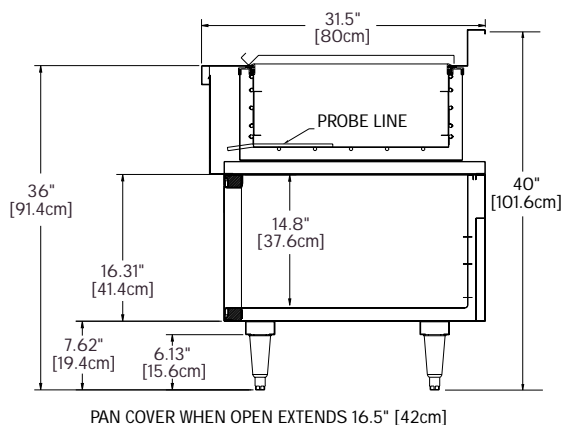

END VIEW
ALL MODELS




19" [48.3cm]
DOOR

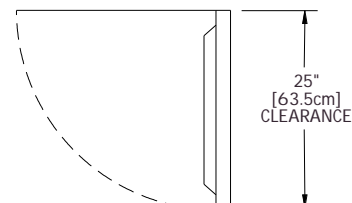


27" [68.6cm]
DOOR


ELEVATION VIEW
F18MR31A




ELEVATION VIEW
F18MR44A,
F18MR44D

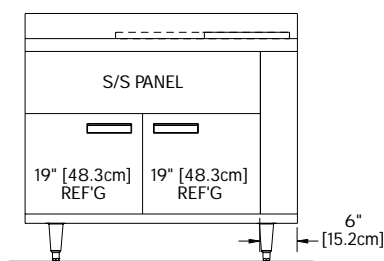

ELEVATION VIEW
F18MR52A,
F18MR52D,
F18MR52E

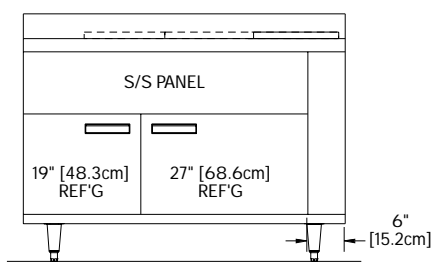

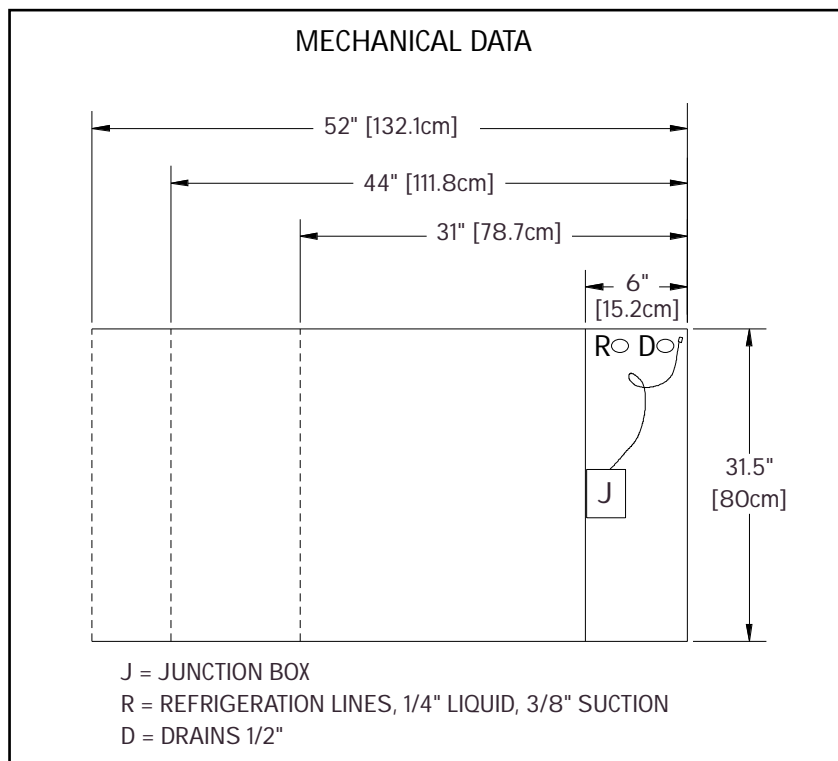

Mechanical Data-Standard Unit

MODEL NUMBER	NUMBER OF DOORS	NUMBER OF PANS	STORAGE CU. FT.	*H.P.	VOLTS/HERTZ/ PHASE	AMPS	SHIP WEIGHT LBS/KG	BTU DESIGN LOAD BASE/RAIL	EVAP. CAP BTU/*TD BASE/RAIL
F18MR31A	(1) 19"	6	4.11	1/4*	115/60/1	3.0	350/159	280/265	120/12
F18MR44A	(2) 19"	6	6.94	1/4*	115/60/1	3.0	390/177	444/265	120/12
F18MR44D	(2) 19"	12	6.94	1/4*	115/60/1	3.0	380/172	444/529	120/22
F18MR52A	19" & 27"	6	8.69	1/3*	115/60/1	3.0	440/199	515/265	120/12
F18MR52D	19" & 27"	12	8.69	1/3*	115/60/1	3.0	430/195	515/529	120/22
F18MR52E	19" & 27"	18	8.69	1/3*	115/60/1	3.0	420/190	515/794	120/31

*Recommended horsepower