

PROJECT	
ITEM #	
QUANTITY	DATE
APPROVAL	

# KHC-NU

## Mobile Hot and Cold Combination Counters

### Short Form Specifications

**Exterior Body** is seamless, one-piece molded fiberglass, having perfectly smooth exterior surface with all corners fully rounded. The fiberglass reinforced polyester (F.R.P.) is molded with permanent color. Stress points are internally reinforced.

**Exterior top** is constructed of 14-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners. Top has one to four electrically heated, recessed, die-stamped stainless steel hot food warmers. Each warmer accommodates one 12.75" x 20.75" x 6" (32.4cm x 52.7cm x 15.2cm) pan.

**Heated food warmers** are constructed of die-stamped stainless steel. Each Heated food warmer is individually equipped with a heated element rated at 1000 watts for 120 volt or 208/230 volt, 60 hertz, single phase service and wired to an adjustable control switch and indicator light in the control panel. Heated food warmers are interwired to a 3-wire, grounded plug for 120 volt or 208/230 volt, 60 hertz, single phase electrical service. Unit has on/off switch mounted on the exterior.

**Insulated ice pan** is 7" (17.8cm) deep and constructed of 22-gauge stainless steel. A removable, perforated false bottom 1" (2.54cm) high, constructed of stainless steel is supplied. The ice pan is separated from the exterior top by a concealed breaker strip and fully insulated with foamed-in-place polyurethane insulation. Ice pan is equipped with a drain valve located at the bottom of the unit.

**Casters:** Unit is mounted on 5" (12.7cm) diameter swivel casters with non-marking polyolefin tires and plate brakes. Overall height of caster assembly is 6.00" (15.2cm).

### Optional Accessories and Modifications:

- A) 12" (30.5cm) wide stainless steel fold-down tray slide
- C) 10" (25.4cm) wide three-bar fold-down tray slide
- D) 10" (25.4cm) wide composite fold-down cutting boards
- E) 10" (25.4cm) wide stainless steel fold-down work shelf
- F) Line-up interlock device
- G) Glass-front counter protector
- H) Two tier display with glass shelves and sneezeguards
- HD) Dual service two tier display with sneezeguards
- I) Three tier display with glass shelves and sneezeguards
- J) 12" (30.5cm) wide 18-gauge stainless steel overshef
- KS) Single service flip-up sneezeguard
- KD) Double service flip-up sneezeguard
- LI) \*Incandescent light fixtures
- M) \*Radiant heat lamps
- MB) \*Bullet-style heat lamps
- P) Open understorage with shelf (KH-NU Series only)
- Q) \*120V/60Hz/1Ø, 10 amp convenience outlet with breaker
- QQ) Drains from food wells, plumbed to common valve
- ST) Stainless steel trim strips
- UU) Molded fiberglass trim strips
- V) 6" (15.2cm) high adjustable stainless steel legs in lieu of casters


*\*Inclusion of these options will alter the electrical specifications of unit.*




**Model KH2C-60-NU**

shown with option A,E and KS




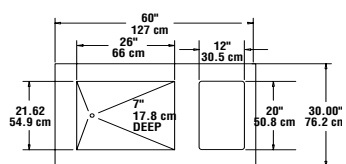


**PLAN VIEW**  
**KHC-50-NU**

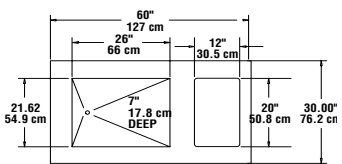


**PLAN VIEW**  
**KHC-60-NU**

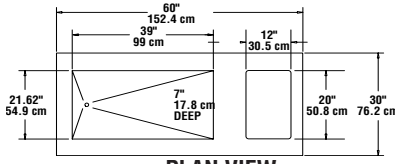


**PLAN VIEW**  
**KHC-74-NU**

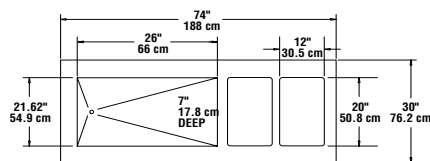


**PLAN VIEW**  
**KH2C-74-NU**

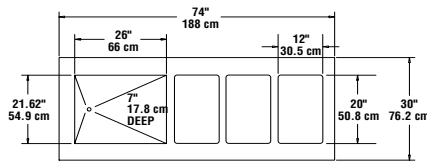


**PLAN VIEW**  
**KH3C-74-NU**

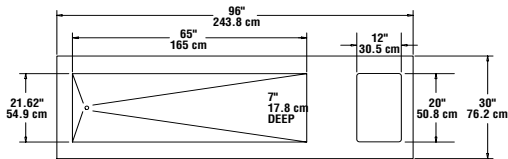


**PLAN VIEW**  
**KHC-96-NU**

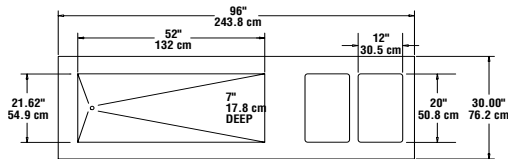


**PLAN VIEW**  
**KH2C-96-NU**

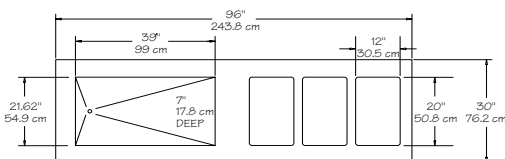


**PLAN VIEW**  
**KH3C-96-NU**

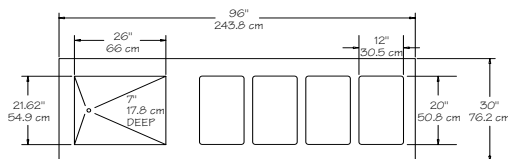

**PLAN VIEW**  
**KH4C-96-NU**

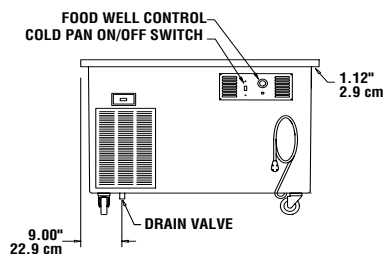

**TYPICAL ELEVATION VIEW**  
**ALL MODELS**



**RIGHT END VIEW**  
**ALL MODELS**

## Mechanical Data — Standard Unit

MODEL NUMBER	VOLTAGE (60HZ/1Ø)	AMP	NEMA PLUG	SHIP WEIGHT LBS./KG.
KHC-50-NU	120	9.0	5-15P	300/136
KHC-60-NU	120	9.0	5-15P	350/159
KHC-74-NU	120	9.0	5-15P	400/181
KHC-96-NU	120	9.0	5-15P	425/193

MODEL NUMBER	VOLTAGE/ (60HZ/1Ø)	AMP	NEMA PLUG	SHIP WEIGHT LBS./KG.
KH2C-74-NU	120/208-230	11.0	14-20P	410/186
KH2C-96-NU	120/208-230	11.0	14-20P	430/195
KH3C-74-NU	120/208-230	16.0	14-20P	420/191
KH3C-96-NU	120/208-230	16.0	14-50P	450/204
KH4C-96-NU	120/208-230	22.0	14-30P	460/209