

# LT

Drop-in tray and rack dispensers

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400  
 Approved \_\_\_\_\_  
 Date \_\_\_\_\_

## Models

- |           |                                  |            |                                  |
|-----------|----------------------------------|------------|----------------------------------|
| • LT-1014 | 15.75" X 22.12" single dispenser | • LT-1826  | 31.75" X 25.12" single dispenser |
| • LT-1216 | 21.75" X 19.12" single dispenser | • LT-2020  | 26.75" X 27.12" single dispenser |
| • LT-1221 | 26.75" X 19.12" single dispenser | • LT2-1014 | 27.75" X 21.12" double dispenser |
| • LT-1418 | 23.75" X 21.12" single dispenser | • LT2-1216 | 23.12" X 31.75" double dispenser |
| • LT-1422 | 27.75" X 21.12" single dispenser | • LT2-1221 | 31.75" X 28.12" double dispenser |
| • LT-1622 | 27.75" X 23.12" single dispenser |            |                                  |



LT-1418

## Standard Features

- Top flange and bottom support to be 16-gauge stainless steel
- Dispenser body shall have four 14-gauge uprights, reinforced with 14-gauge stainless steel angles
- Top flange, uprights and bottom support to be integrally welded
- Dispenser platform carrier shall be 18-gauge stainless steel and removable for cleaning
- Self-leveling mechanisms shall be adjustable by adding and removing stainless steel extension springs located inside the elevator housing
- One year parts and 90 day labor standard warranty

## Options & Accessories

- Special tray dispenser sizes
- Special height

## Specifications


Dispenser frame uprights shall be 14-gauge stainless steel. Bottom supports shall be 16-gauge stainless steel. Top supporting flange shall be 16-gauge stainless steel with beveled outer edges. Flange, uprights and supports shall be integrally welded together.

Dispenser platform carrier shall be 18-gauge stainless steel and shall be removable for cleaning. Each dispenser shall have two self-leveling mechanisms.

Self-leveling mechanisms shall be field adjustable by adding or removing stainless steel extension springs located inside the elevator housing



LT: Drop-in tray and rack dispensers

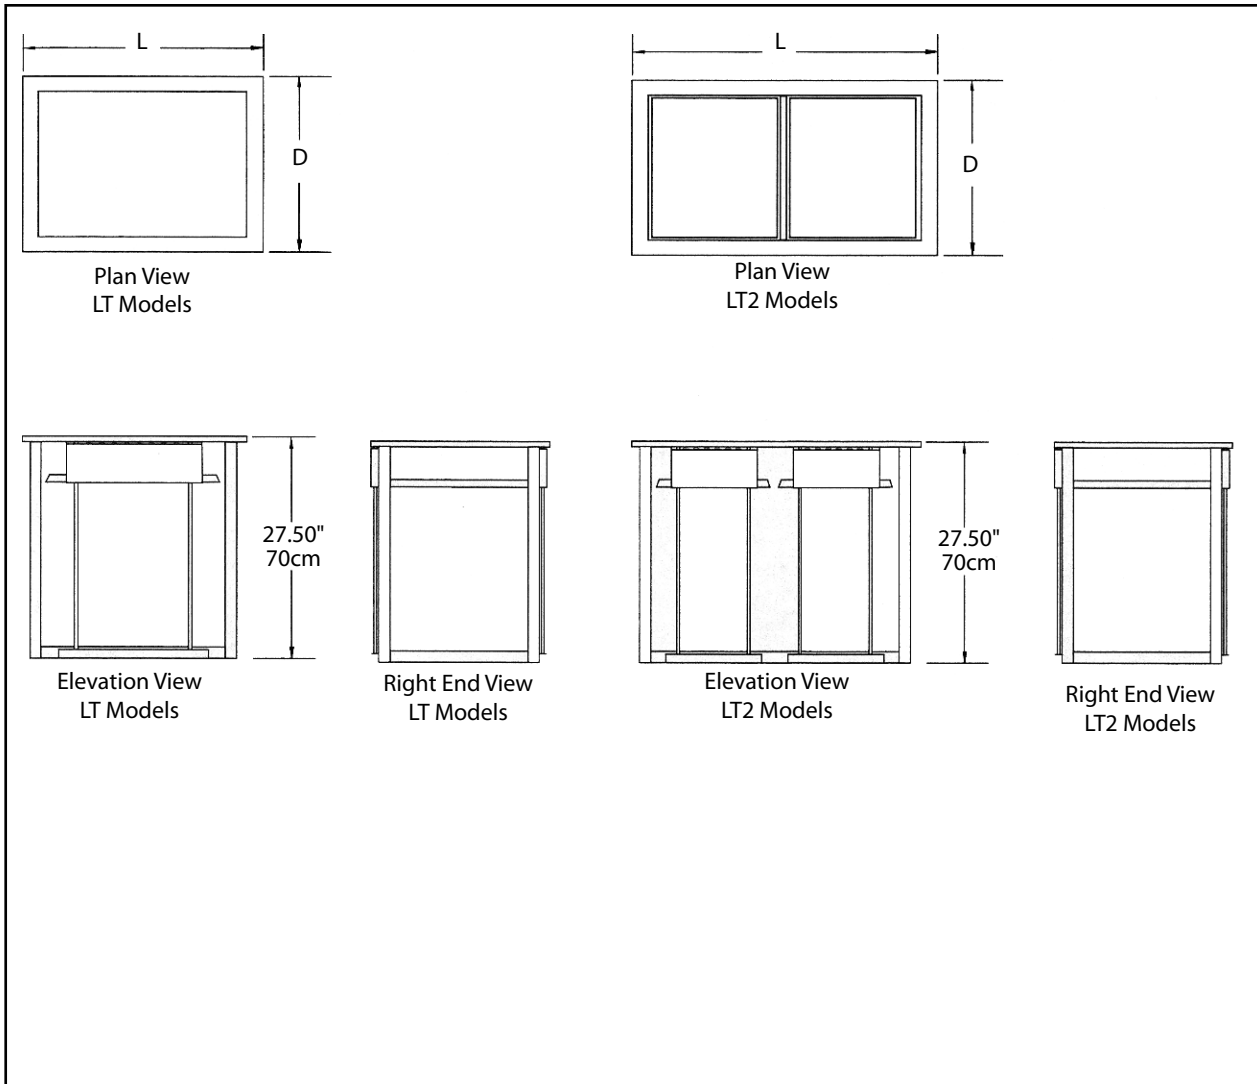

Specifications

Model	Length	Depth	Counter Top Cutout Dimensions	Maximum Tray Size	Ship Weight
LT-1014	15.75" (40cm)	22.12" (56cm)	11.75" x 21.00" (31cm x 53cm)	10" x 15" (25cm x 38cm)	43lbs/19kg
LT-1216	21.75" (55cm)	19.12" (49cm)	17.75" x 18.00" (45cm x 46cm)	12" x 16" (30cm x 41cm)	43lbs/19kg
LT-1221	26.75" (68cm)	19.12" (49cm)	22.75" x 18.00" (58cm x 46cm)	12" x 21" (30cm x 53cm)	45lbs/20kg
LT-1418	23.75" (60cm)	21.12" (54cm)	19.75" x 20.00" (50cm x 51cm)	14" x 18" (36cm x 46cm)	43lbs/19kg
LT-1422	27.75" (70cm)	21.12" (54cm)	23.75" x 20.00" (60cm x 51cm)	14" x 22" (36cm x 56cm)	45lbs/20kg
LT-1622	27.75" (70cm)	23.12" (59cm)	23.75" x 20.00" (60cm x 51cm)	16" x 22" (41cm x 56cm)	45lbs/20kg
LT-1826	31.75" (81cm)	25.12" (64cm)	27.75" x 24.00" (70cm x 61cm)	18" x 26" (46cm x 66cm)	48lbs/22kg
LT-2020	26.75" (68cm)	27.12" (69cm)	22.75" x 26.00" (58cm x 66cm)	20" x 21" (51cm x 53cm)	45lbs/20kg
LT2-1014	27.75" (70cm)	21.12" (54cm)	23.75" x 20.00" (60cm x 51cm)	10" x 14" (25cm x 36cm)	48lbs/22kg
LT2-1216	23.12" (59cm)	31.75" (81cm)	27.75" x 22.00" (70cm x 56cm)	12" x 16" (30cm x 41cm)	48lbs/22kg
LT2-1221	31.75" (81cm)	28.12" (71cm)	27.75" x 27.00" (70cm x 69cm)	12" x 21" (30cm x 53cm)	48lbs/22kg

LT2 models dispense two separate stacks of trays.

Delfield reserves the right to make changes to the design or specifications without prior notice.

Drop-in tray and rack dispensers

