

Models

- N-520 29" x 28" x 36" dispenser, 240 half pint carton capacity
- N-860 42" x 28" x 36" dispenser, 408 half pint carton capacity
- N-1200 55" x 28" x 36" dispenser, 576 half pint carton capacity
- N-1530 68" x 28" x 36" dispenser, 744 half pint carton capacity



Model N-860
shown with optional casters
and wrap-around bumpers

Standard Features

- Six anodized aluminum divider trays per opening except opening over compressor, (2) supplied over compressor
- Refrigeration system shall be HFC-134A refrigerant
- Insulated with environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane insulation
- One year parts and 90 day labor standard warranty

Options & Accessories

- Wrap-around bumpers (adds 1.75" to length and depth)
- (4) 5" diameter casters (heavy-duty polyurethane) with corner bumpers (4 locking; adds 1.75" to L & D)
- Lid locking device
- Dial-style or digital-style thermometer
- Laminate side panels
- Fiberglass side panels
- 220 volt, 50/60 cycle, single phase electrical connections
- Wire baskets
- Stainless steel divider tray
- Additional warranties

Specifications

Exterior sides shall be 20-gauge stainless steel. Top and corner supports shall be 16-gauge stainless steel, welded, ground and polished into one integral unit.

Inner liner shall be water-tight and constructed of 22-gauge stainless steel with 1.25" (3cm) I.P.S. drain. Unit shall be insulated with high-density, foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane insulation with a non-conductive to breaker strip.

Each opening shall have a stainless steel sliding lid with 4" (10 cm) chrome handles.

Three stainless steel louvers shall be installed in the end and sides of the cabinet to allow proper air flow to the condensing unit.

Each self-leveling mechanism shall be field adjustable by adding or removing stainless steel extension springs in the elevator housing inside the unit. The elevators shall be connected by removable platform carriers constructed of 18-

gauge stainless steel.

Six anodized aluminum divider trays will be supplied per deep cabinet section. Two anodized aluminum divider trays will be supplied per deep cabinet section over the machine compartment. See chart on back for milk storage capacity.

Refrigeration system shall use HFC-134a refrigerant. Refrigerant flow shall be controlled by an expansion valve. Cabinet shall maintain 36°F to 40°F (2°C to 4°C) temperature with lids closed for storage.


Refrigeration system shall be controlled by a pressure control, located near the condensing unit.

Electrical connections shall be 115 volt, 60 cycle, single phase. Unit shall have a 9' (2.7m) long electrical cord and NEMA 5-15P plug.


Unit shall be mounted on 6.00" (15cm) high adjustable stainless steel legs.

This equipment is intended for storage and /or display of pre-packaged or bottled products only.







**Plan View
Model N-520**




**Plan View
Model N-860**

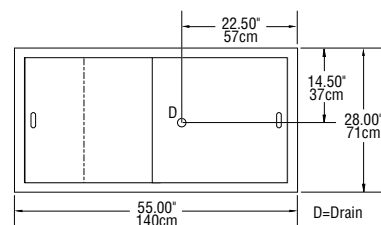


**Plan View
Model N-1200**

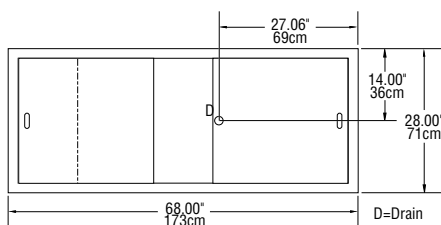


**Plan View
Model N-1530**




**Elevation View
Model N-520**




**Elevation View
Model N-860**

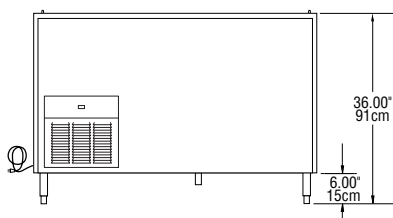

**Elevation View
Model N-1200**

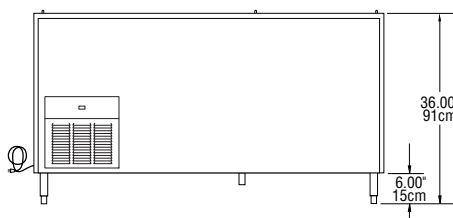

**Elevation View
Model N-1530**



**End View
All Models**

Specifications

Model	Capacity (half pint cartons)	H.P.	Amps	Volts/Hertz/Phase	BTU Load	BTU Capacity	NEMA Plug	Ship Weight	Energy (KWH)
N-520	240	1/4	5.0	120/60/1	190	1040	5-15P	327lbs/ 148kg	2.60
N-860	408	1/4	5.0	120/60/1	260	1170	5-15P	392lbs/ 178kg	2.60
N-1200	576	1/4	5.0	120/60/1	330	1270	5-15P	462lbs/ 210kg	2.60
N-1530	744	1/4	5.0	120/60/1	400	1360	5-15P	532lbs/ 241kg	2.60

Delfield reserves the right to make changes to the design or specifications without prior notice.