



| | |
|----------|------|
| PROJECT | |
| ITEM # | |
| QUANTITY | DATE |
| APPROVAL | |

NSCF**Free-Standing Self-Contained Milk & Ice Cream Dispenser****Short Form Specifications**

Exterior sides shall be 20-gauge stainless steel. Top and corner supports shall be 16-gauge stainless steel, welded, ground and polished into one integral unit.

Interior shall have (2) separate compartments, one refrigerated and one freezer. Inner liners shall be water-tight and constructed of 22-gauge stainless steel with a 1.25" (3.2cm) I.P.S. drain. Unit shall be insulated with high-density, foamed-in-place polyurethane insulation with a non-conductive top breaker strip.

Each opening shall have an insulated, stainless steel folding lid with high impact plastic liner, molded rubber edge and black plastic handles.

(3) stainless steel louvers shall be installed in the end and sides of the cabinet to allow proper air flow to the condensing unit.

Each self-leveling mechanism shall be field adjustable by adding or removing stainless steel extension springs in the elevator housing inside the unit. The elevators shall be connected by removable platform carriers constructed of 18-gauge stainless steel.

(6) anodized aluminum divider trays will be supplied per cabinet section. NOTE: See chart on back for storage capacities.

Refrigeration system shall use HFC-404A refrigerant. Refrigerator section shall be controlled by an EPR valve; the freezer section shall be controlled by a pressure control. Controls shall be located near the condensing unit. Cabinet shall maintain 36°F to 40°F (2°C to 4°C) temperature in the refrigerator section, and 0°F to 5°F (-18°C to -15°C) temperature in the freezer section with lids closed for storage.

Electrical connections shall be 115 volt, 60 cycle, single phase. Unit shall have a 9' (2.7m) long electrical cord and NEMA 5-15P plug.


Unit shall be mounted on 6.00" (15.2cm) high adjustable stainless steel legs.

Optional Accessories and Modifications

- 4.00" (10.2cm) diameter swivel casters (all locking) with corner bumpers (adds 2.50" [6.4cm] to overall length and depth and reduces overall height by 1.00" [2.5cm])
- Heavy-duty casters (contact factory)
- Corner bumpers (adds 2.50" [6.4cm] to overall length and depth)
- Wrap-around bumpers (adds 1.75" [4.4cm] to overall length and depth)
- Wire baskets (16.81" x 9.62" x 3.87" [42.7cm x 24.4cm x 9.8cm])
- Laminate panels
- Fiberglass panels
- Lid locking device
- *Special voltages (contact factory)


NOTE: This equipment is intended for storage and /or display of pre-packaged or bottled products only.

*Inclusion of this option will alter the electrical specifications of the unit.

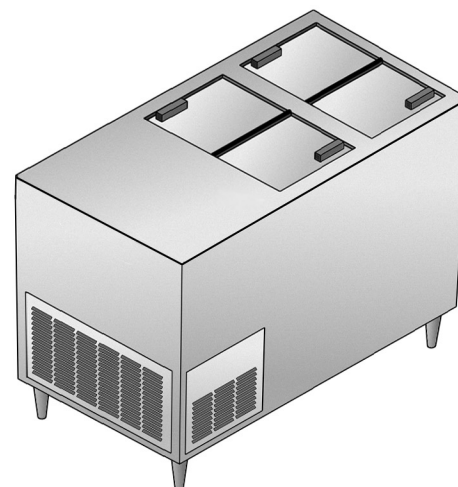


Model NSCF-48




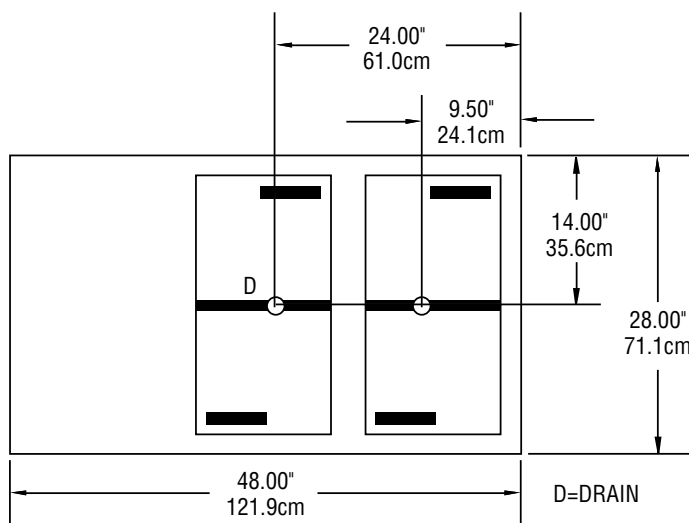


**PLAN VIEW
MODEL NSCF-48**



**LID OPENING DETAIL
MODEL NSCF-48**

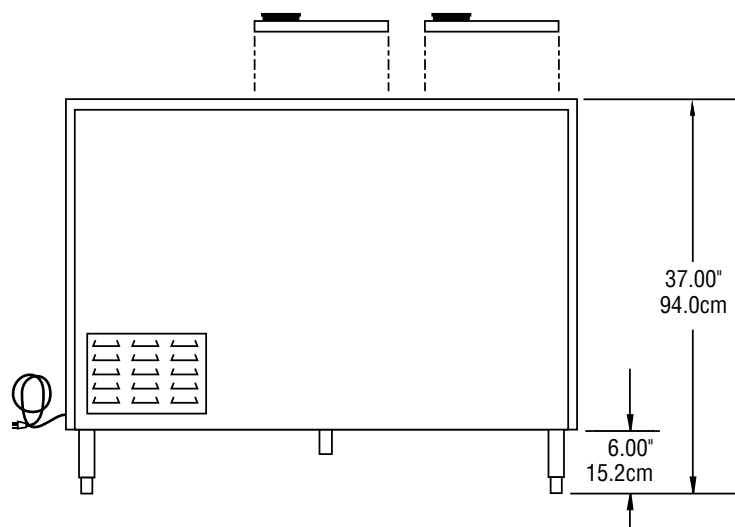

**ELEVATION VIEW
MODEL NSCF-48**



**END VIEW
MODEL NSCF-48**

Mechanical Data—Standard Unit

| MODEL NUMBER | CAPACITY | H.P. | AMPS | REFRIG. BTU LOAD | REFRIG. BTU CAPACITY | FREEZER BTU LOAD | FREEZER BTU CAPACITY | SHIP WEIGHT |
|----------------|--|------|------|------------------|----------------------|------------------|----------------------|-----------------|
| NSCF-48 | 126 half pint cartons & 210 3oz. ice cream cups | 1/4 | 6.0 | 140 | 1600 | 410 | 800 | 390 lbs/ 177 kg |