

# SCFT-NU

Mobile Self-Contained Frost Top Serving Counter

Project \_\_\_\_\_  
Item \_\_\_\_\_  
Quantity \_\_\_\_\_  
CSI Section 11400  
Approved \_\_\_\_\_  
Date \_\_\_\_\_

SCFT-NU: Mobile Self-Contained Frost Top Serving Counter

## Models

- SCFT-36-NU - 36" Mobile frost top serving counter without understorage
- SCFT-50-NU - 50" Mobile frost top serving counter without understorage
- SCFT-60-NU - 60" Mobile frost top serving counter without understorage
- SCFT-74-NU - 74" Mobile frost top serving counter without understorage
- SCFT-96-NU - 96" Mobile frost top serving counter without understorage



SCFT-74-NU

## Standard Features

- 14-gauge stainless steel top
- 18-gauge stainless steel exterior body
- 14-gauge galvanized bottom
- Frost top is 18-gauge stainless steel, one piece construction; perimeter drain with valve located at bottom of unit standard
- 18" x 26" sheet pan can rest on frost top
- On/off switch located on exterior of unit
- SCFT units are standard with enclosed base
- Environmentally friendly R404A refrigerant
- A maximum 10' long cord and plug
- All exterior panels reinforced with overlapping corners, welded in place
- All body cutouts reinforced with 14-gauge channel supports
- All units are standard on 5" diameter polyurethane swivel casters for easy cleaning
- Easy to use stainless steel interlock system is standard on base and tray slides
- Environmentally friendly HFC-404A refrigerant
- One year parts and 90 day labor standard warranty

## Options & Accessories

- Tray slides and work shelves
  - 10" (25.4cm) wide composite fold-down cutting boards
  - Line-up interlock device
  - Food shields
  - Glass-front counter protector
  - 12" (30.5cm) wide 18-gauge stainless steel overshell
  - Fluorescent or incandescent light fixtures\*
  - Open understorage with shelf
  - 120V/60Hz/1ø, 10 amp convenience outlet with breaker\*
  - Dry storage compartment
  - Stainless steel trim strips
  - 14" x 30" (35.6cm x 76.2cm) stainless steel end drop shelf
  - 6" (15.2cm) high adjustable stainless steel legs in lieu of casters
  - Laminate exterior panels in lieu of stainless steel exterior panels
- \* Inclusion of these options will alter the electrical specifications of unit

## Specifications

**Exterior body** is constructed of 18-gauge stainless steel side panels and 14-gauge galvanized bottom. All exterior side panels are reinforced with overlapping corners and are welded in place. All body cutouts are reinforced with 14-gauge galvanized channel supports.


**Exterior top** is constructed of 14-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners.

**Frost top** is 18-gauge stainless steel, one-piece construction and perimeter trough. Underside of frost top is sealed with refrigeration lines and insulated with high-density, closed cell environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane. Frost top assembly is enclosed in a galvanized steel jacket. The frost top is separated from the exterior top by a thermal break.


**Refrigeration system** uses HCFC-404a refrigerant and has a self-contained 115 volt, 60 Hertz, single phase hermetically sealed condensing unit. Unit is wired with a 3-wire, grounded, maximum 10' (3m) cord and plug. Unit has an on/off switch mounted on the exterior.

**Casters:** Unit is mounted on 5" (12.7cm) diameter swivel casters with non-marking polyolefin tires and plate brakes. Overall height of caster assembly is 6.00" (15.2cm).




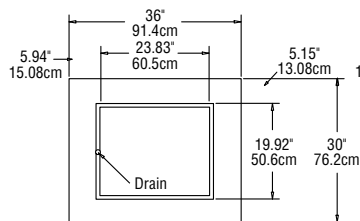


**Plan View  
SCFT-36-NU**

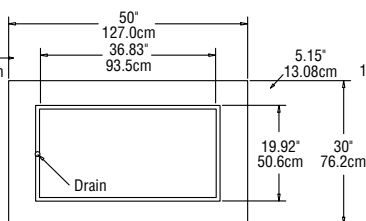


**Plan View  
SCFT-50-NU**

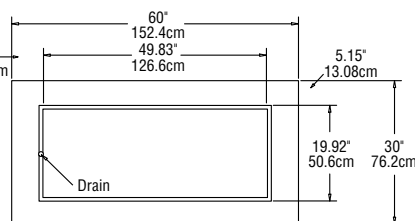


**Plan View  
SCFT-60-NU**

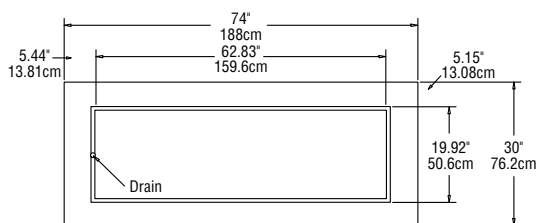


**Plan View  
SCFT-74-NU**

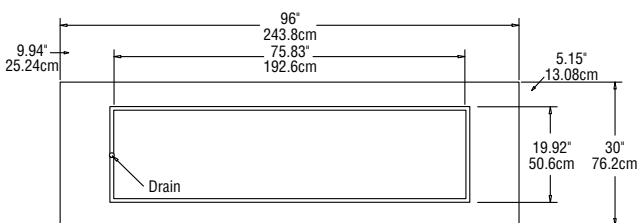

**Plan View  
SCFT-96-NU**



**Elevation View  
All SCFT-NU Models**



**End View  
All SCFT-NU Models**

Specifications					
Model	V/Hz/Ph	Amps	H.P.	Nema Plug	Ship Weight
SCFT-36-NU	115/60/1	8.0	1/4	5-15P	380 lbs/172 kg
SCFT-50-NU	115/60/1	8.0	1/4	5-15P	455 lbs/206 kg
SCFT-60-NU	115/60/1	8.0	1/4	5-15P	540 lbs/245 kg
SCFT-74-NU	115/60/1	8.0	1/4	5-15P	610 lbs/277 kg
SCFT-96-NU	115/60/1	8.0	1/4	5-15P	680 lbs/308 kg

Delfield reserves the right to make changes to the design or specifications without prior notice.