

| | |
|----------|------|
| PROJECT | |
| ITEM # | |
| QUANTITY | DATE |
| APPROVAL | |

SCM

Mobile Milk Counters

Short Form Specifications

Exterior body is constructed of 18-gauge stainless steel side panels and 14-gauge galvanized bottom. All exterior side panels are reinforced with overlapping corners and are welded in place. All body cutouts are reinforced with 14-gauge galvanized channel supports.

Exterior top is constructed of 14-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners. Top has one (SCM-36), two (SCM-50), three (SCM-60) or four (SCM-74) die-stamped openings and is provided with hinged removable lids. Lids are constructed of stainless steel and have a rubber gasket seal.

Refrigerated Compartment; have water-tight inner liner constructed of 22-gauge stainless steel, with radius corners and 1.5" (3.8cm) of polyurethane insulation. Compartment is equipped with a drain plumbed to a drain valve located in the bottom of the unit. Refrigerated compartment is equipped with automatic self leveling, field adjustable elevators. Divider trays are supplied.

Refrigeration; copper refrigeration coils are attached to outside of inner liner. Unit is refrigerated by self-contained, 115 volt, 60 Hertz, single phase hermetically sealed condensing unit with pressure control. Unit is wired with a 3-wire, grounded, maximum 10' (3m) 120 volt cord and plug. Refrigeration system use HFC-134a refrigerant

Casters; unit is mounted on 5" (12.7cm) diameter swivel casters with non-marking polyolefin tires and plate brakes. Overall height of caster assembly is 6" (15.2cm).




Model SCM-50


Optional Accessories and Modifications

- A) 12" (30.5cm) wide stainless steel fold-down tray slide
- C) 10" (25.4cm) wide three-bar fold-down tray slide
- E) 10" (25.4cm) wide stainless steel fold-down work shelf
- F) Line-up interlock device
- R) 10" x 17" x 4" (25.4cm x 43.2cm x 10.2cm) deep chrome wire baskets
- S) Stainless steel lid locking device with keyed lock
- ST) Stainless steel trim strips
- U) 14" x 30" (35.6cm x 76.2cm) stainless steel end drop shelf
- V) 6" (15.2cm) high adjustable stainless steel legs in lieu of casters
- X) Laminate exterior panels in lieu of stainless steel exterior panels







**PLAN VIEW
SCM-36**

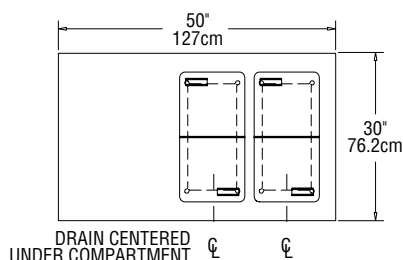


**PLAN VIEW
SCM-50**

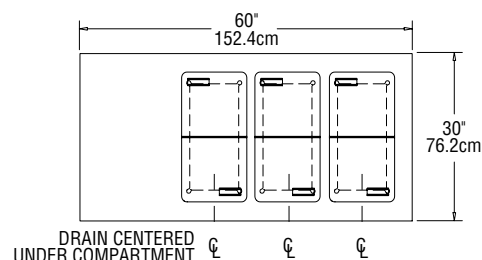


**PLAN VIEW
SCM-60**

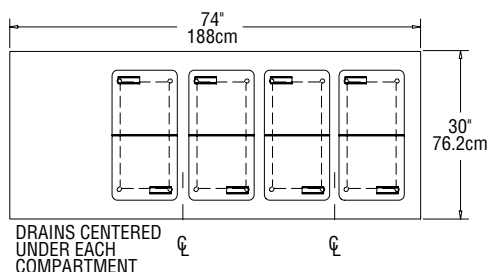


**PLAN VIEW
SCM-74**




**ELEVATION VIEW
SCM-36**

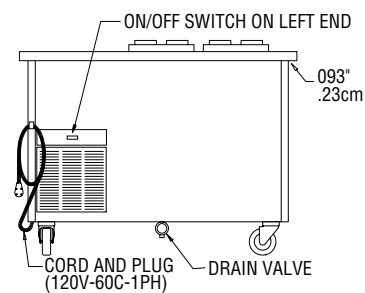


**ELEVATION VIEW
SCM-50**

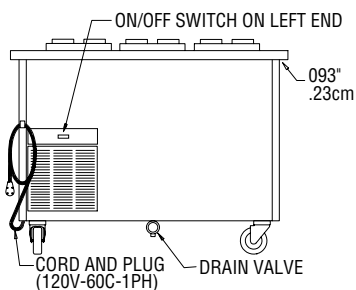

**ELEVATION VIEW
SCM-60**

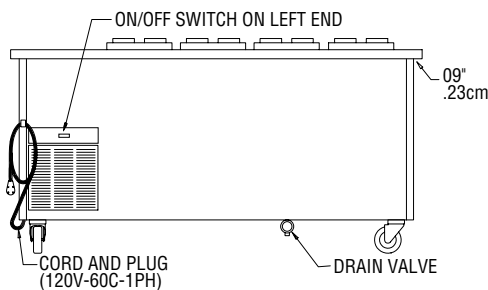

**ELEVATION VIEW
SCM-74**



**END VIEW
ALL MODELS**

Mechanical Data—Standard Unit

| MODEL NUMBER | MILK CAPACITY* | H.P. | VOLTS/HERTZ/ PHASE | AMPS | NEMA PLUG | SHIP WEIGHT |
|---------------|----------------|------|--------------------|------|-----------|----------------|
| SCM-36 | 126 | 1/4 | 120/60/1 | 5.0 | 5-15P | 400 lbs/181 kg |
| SCM-50 | 252 | 1/4 | 120/60/1 | 5.0 | 5-15P | 450 lbs/204 kg |
| SCM-60 | 378 | 1/4 | 120/60/1 | 5.0 | 5-15P | 500 lbs/227 kg |
| SCM-74 | 504 | 1/3 | 120/60/1 | 6.0 | 5-15P | 550 lbs/250 kg |

*Based on 0.5 pint (237ml), 2.75" x 2.75" (7cm x 7cm) gable top cartons.