



PROJECT	
ITEM #	
QUANTITY	DATE
APPROVAL	

F18WC

31.5" (80cm) Deep Self-Contained Refrigerated Work Tables

Short Form Specifications

Exterior top is constructed of one-piece 16-gauge stainless steel, with integral 2.12" (5.4cm) high square nosing at the front, and 4" (10.2cm) high by 2" (5.1cm) deep backsplash at the rear. Top is insulated with 2" (5.1cm) of high-density insulation.

Exterior back and bottom are 24-gauge galvanized steel. Exterior ends are 18-gauge galvanized steel.

Base interior has 22-gauge stainless steel back and bottom. Interior ends and door frames are thermoformed ABS plastic. Base is insulated with 1.5" (3.8cm) of high-density foamed-in-place polyurethane.

Door(s) have a 22-gauge stainless steel exterior front, with a thermoformed ABS plastic interior liner. Door(s) have black recessed handle(s) and a snap-in magnetic gasket which is easily replaceable. Each interior door section has (1) removable epoxy-coated wire shelf.

Base has a machine compartment, standard on right, with a condensing unit with condensate evaporator and an electrical junction box installed. Machine compartment has a removable louver for access to condensing unit. Blower coil(s) are located behind the door mullions. Refrigeration system uses HFC-404A refrigerant, and will maintain 36°F (2°C) to 40°F (4°C) interior cabinet temperature.

Unit is mounted on 6.13" (15.6cm) high adjustable stainless steel legs.

Electrical connections are 115 volts, 60 Hertz, single phase. Unit has a 8' (2.4m) long cord and plug.




Model F18WC78


Optional Accessories & Modifications

- 906A** Stainless steel end
- 505H** Stainless steel back
- 505F** Laminate facing (full front)
- 906E** Laminate end
- 905A** Laminate back
- 1030A** Cutting board (Sanalite or composite)
- 107F** Tray rack
- 1027A** Casters
- 102** Drawers
 - A-(2) 19" in lieu of one door
 - B-(2) 27" in lieu of one door
 - C-(2) 32" in lieu of one door
 - E-(3) 19", 27" or 32" in lieu of one door
- 108** Locks
- 213** *220V/50 cycle


*Inclusion of this option will alter the electrical specifications of the unit




Delfield's
MARK7
modular equipment




ELEVATION VIEW
F18WC39

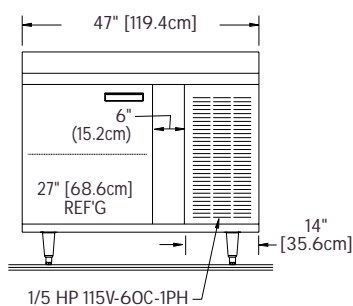


ELEVATION VIEW
F18WC47

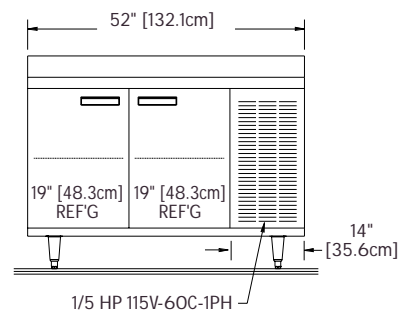


ELEVATION VIEW
F18WC52

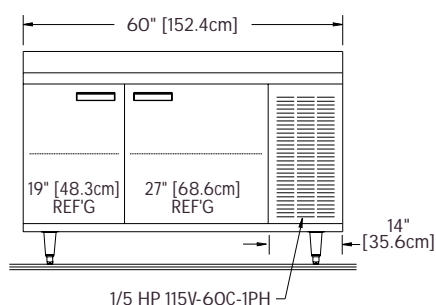


ELEVATION VIEW
F18WC60

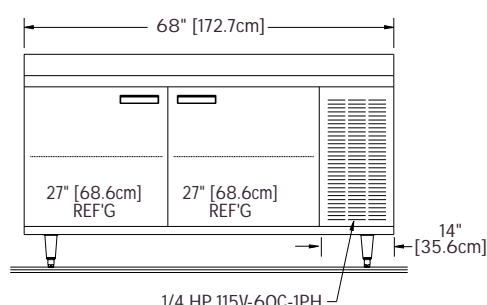


ELEVATION VIEW
F18WC68

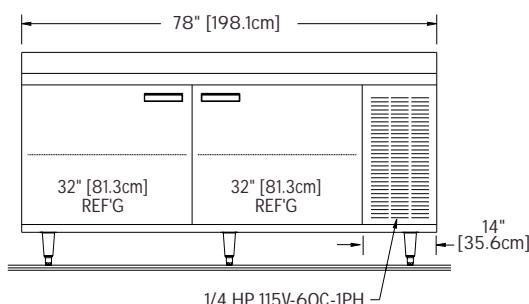


ELEVATION VIEW
F18WC78

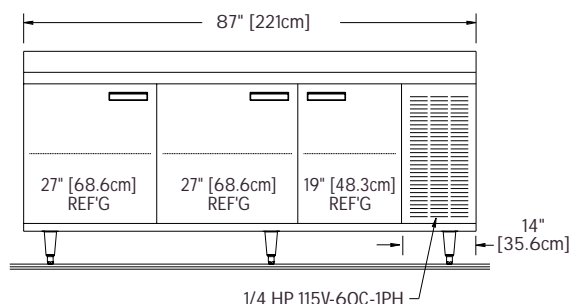


ELEVATION VIEW
F18WC87

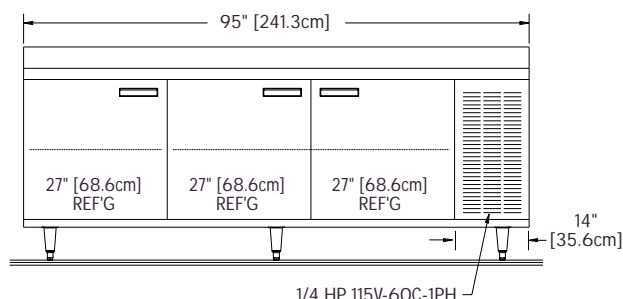

ELEVATION VIEW
F18WC95

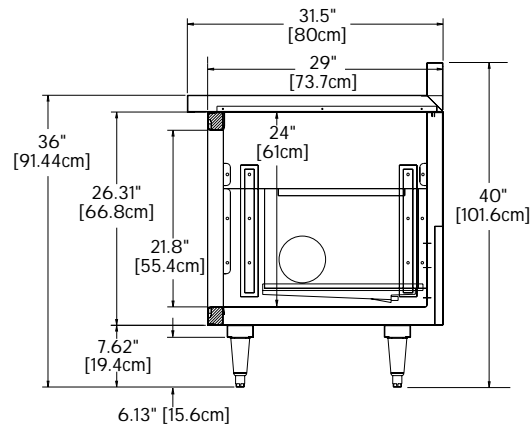


END VIEW
ALL MODELS

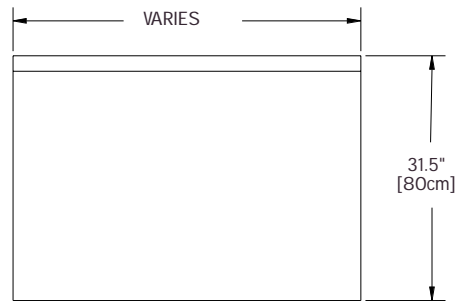


PLAN VIEW
ALL MODELS




19" [48.3cm]
DOOR

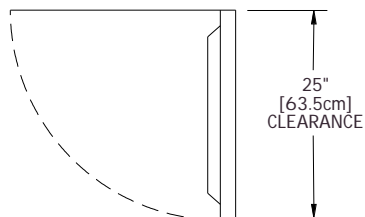

27" [68.6cm]
DOOR

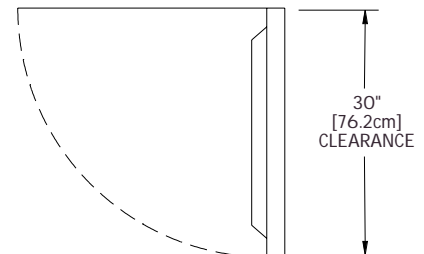

32" [81.3cm]
DOOR

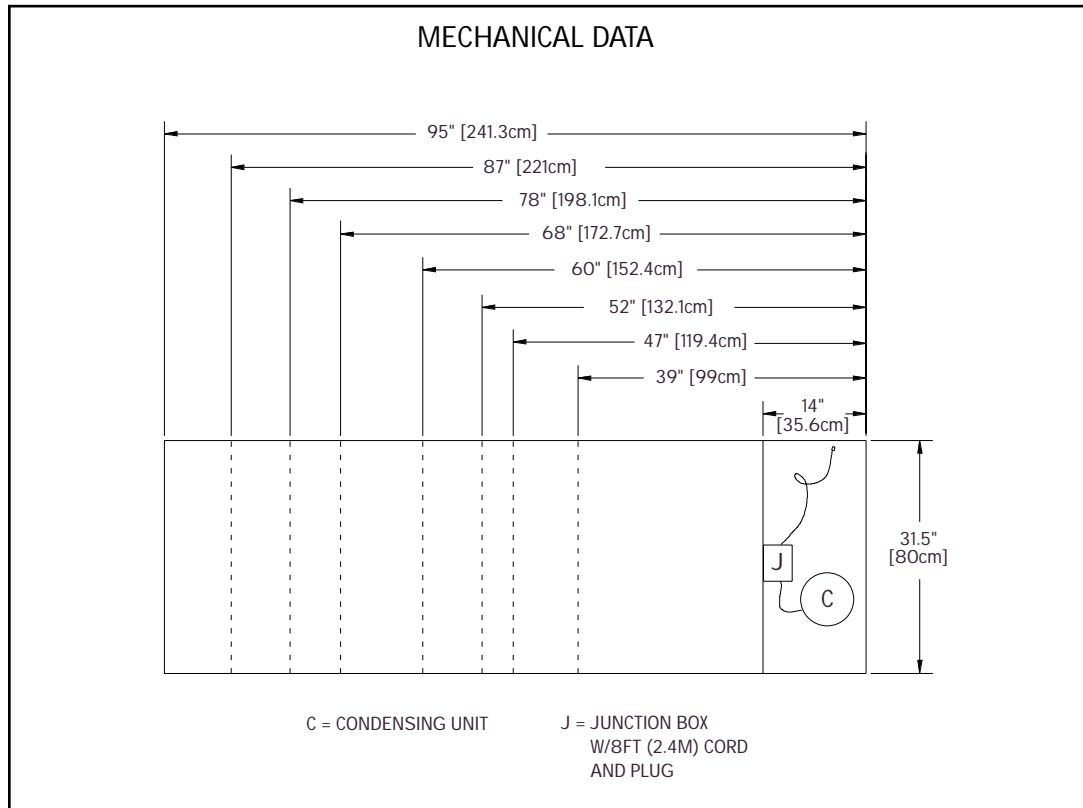

NOTE: UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO INSURE UNIT PERFORMANCE AND MAINTAIN WARRANTY.

Mechanical Data-Standard Unit

MODEL NUMBER	NUMBER OF DOORS	STORAGE CU. FT.	SHELF AREA SQ. FT.	H.P.	VOLTS/HERTZ/ PHASE	AMPS	NEMA PLUG	SHIP WEIGHT LBS/KG	BTU LOAD	BTU SYSTEM
F18WC39	(1) 19"	6.99	2.56	1/5	115/60/1	8.0	5-15P	365/166	383	1462
F18WC47	(1) 27"	9.77	3.95	1/5	115/60/1	8.0	5-15P	390/177	465	1462
F18WC52	(2) 19"	11.52	5.12	1/5	115/60/1	8.0	5-15P	420/191	605	1462
F18WC60	19" & 27"	14.31	6.51	1/5	115/60/1	8.0	5-15P	435/197	686	1462
F18WC68	(2) 27"	17.79	7.90	1/4	115/60/1	10.0	5-15P	495/225	768	1462
F18WC78	(2) 32"	20.59	9.64	1/4	115/60/1	10.0	5-15P	515/234	869	1994
F18WC87	(2) 27" & 19"	23.05	10.29	1/4	115/60/1	10.0	5-15P	535/243	1050	2261
F18WC95	(3) 27"	25.82	11.85	1/4	115/60/1	10.0	5-15P	615/279	1131	2261