



N8100-BR

Drop-In Curved Self-Contained Mechanically Cooled Cold Pans

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

N8100-BR: Drop-In Curved Self-Contained Mechanically Cooled Cold Pans

Models

- N8144-BR Mechanically cooled cold well, fits two standard 12" x 20" pans
- N8159-BR Mechanically cooled cold well, fits three standard 12" x 20" pans
- N8176-BR Mechanically cooled cold well, fits four standard 12" x 20" pans
- N8194-BR Mechanically cooled cold well, fits five standard 12" x 20" pans



N8176-BR


Standard Features

- NSF-7 certified performance
- Stainless steel holding clips secure pans
- Environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane foam insulation
- Push-in perimeter gasket
- Stainless steel louver provided
- Environmentally friendly HFC-134A refrigerant
- 1" drain standard
- Thermostat for temperature control
- One year parts and 90 day labor standard warranty


Options & Accessories

- Custom pan template
 - Adapter bars
 - Single or double service flip-up sneezeguards
 - Flexishield® food shields, single or dual service
 - Relocate compressor
 - Mullion fan assembly
 - Remote refrigeration (specify refrigerant)
 - 220V/50 cycle*
- * Inclusion of this option will alter electrical specifications of unit


N8144-BR

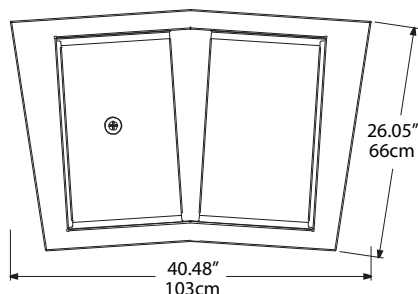


N8144-BR Plan View

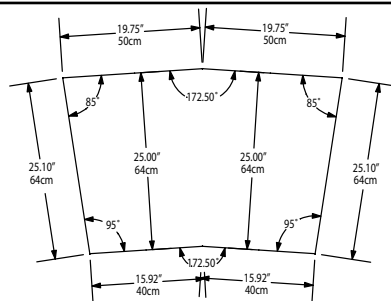

N8144-BR Cutout Dimensions

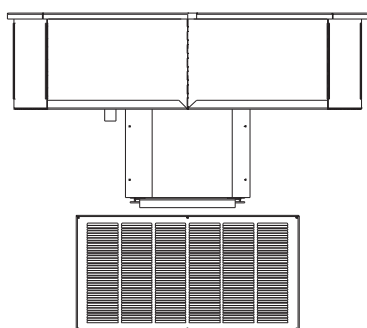


N8144-BR Elevation View




N8144-BR Side View


N8159-BR

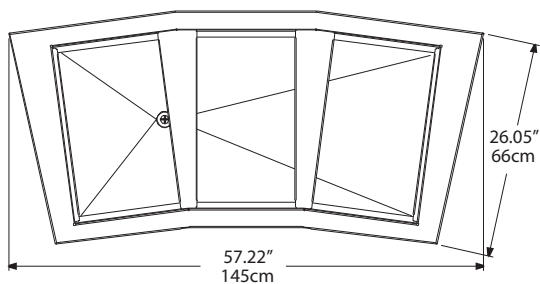


N8159-BR Plan View

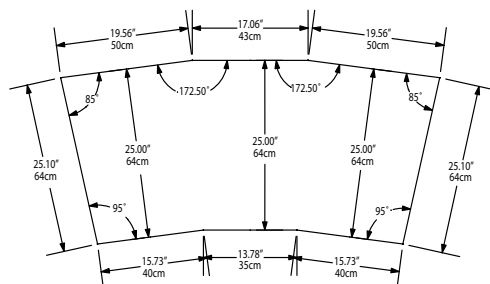

N8159-BR Cutout Dimensions

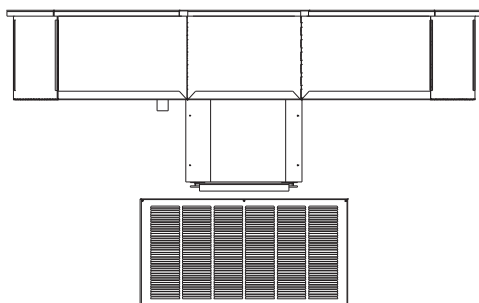


N8159-BR Elevation View




N8159-BR Side View


N8176-BR

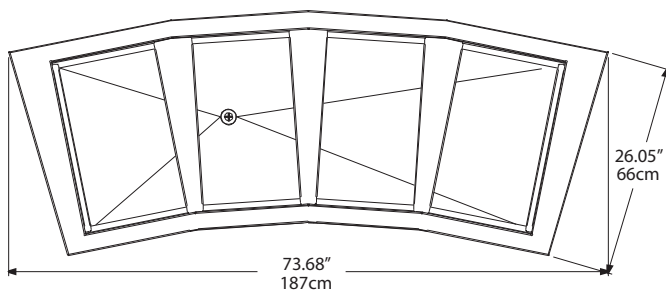


N8176-BR Plan View

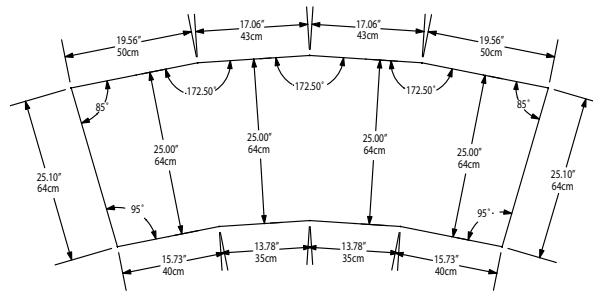

N8176-BR Cutout Dimensions

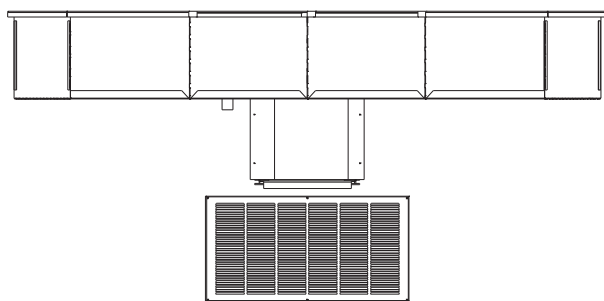


N8176-BR Elevation View




N8176-BR Side View


N8194-BR

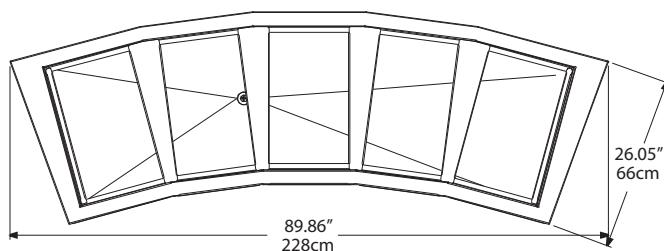


N8194-BR Plan View

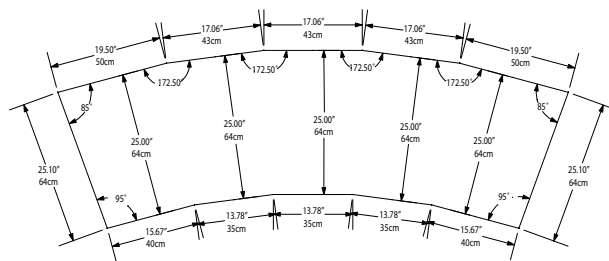

N8194-BR Cutout Dimensions

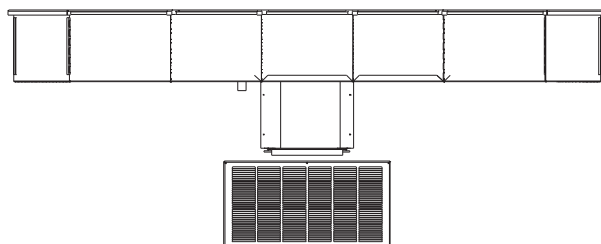

N8194-BR Elevation View



N8194-BR Side View



N8100-BR

Drop-In Curved Self-Contained Mechanically Cooled Cold Pans

Specifications

Top is one-piece 18-gauge stainless steel. Interior liner is 22-gauge stainless steel and is creased to a 1.00" (3cm) diameter drain. Stainless steel holding clips accommodate 12" x 20" (30cm x 51cm) pans 4" or 6" (10cm or 15cm) deep supplied by others. Product temperatures of 33°F (1°C) to 41°F (5°C) are maintained at 86°F (29°C) ambient room temperature, meeting NSF 7 requirements. Adapter bars are standard.

Sides and bottom are wrapped with refrigeration lines and insulated with high-density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) closed-cell polyurethane. Exterior housing is 24-gauge galvanized steel.

Condensing unit is suspended below the cold pan on a 16-gauge steel frame and uses HFC-134a refrigerant. Temperature control has an ON/OFF position to shut down cold pan. Unit has an 8' (2.4m) cord and NEMA 5-15P plug.

A stainless steel louver is provided for field installation; cutout dimension is 12" x 23.5" (30cm x 60cm). A second opening at the rear of the cabinet should be provided at installation to allow for proper air circulation.

Specifications

Model	# Of 12" x 20" Pans Held	Volts/Hertz/Phase	H.P.	Amps	BTU Load	System Capacity	Shipping Weight
N8144-BR	2	115/60/1	1/5	4.0	379	812	161lbs/72kg
N8159-BR	3	115/60/1	1/5	4.0	569	889	184lbs/83kg
N8176-BR	4	115/60/1	1/4	7.0	758	1373	233lbs/105kg
N8194-BR	5	115/60/1	1/4	7.0	948	1469	243lbs/109kg

Delfield reserves the right to make changes to the design or specifications without prior notice.

