


F18SC

31.5" (80cm) Deep Self-Contained Refrigerated Salad Top Tables

Project
Item
Quantity
CSI Section 11400
Approved
Date

Models

- F18SC39A 39" length, six 1/6 pan capacity
- F18SC39B 39" length, eight 1/6 pan capacity
- F18SC52A 52" length, six 1/6 pan capacity
- F18SC52B 52" length, eight 1/6 pan capacity
- F18SC52C 52" length, ten 1/6 pan capacity
- F18SC52D 52" length, twelve 1/6 pan capacity
- F18SC60A 60" length, six 1/6 pan capacity
- F18SC60B 60" length, eight 1/6 pan capacity
- F18SC60C 60" length, ten 1/6 pan capacity
- F18SC60D 60" length, twelve 1/6 pan capacity

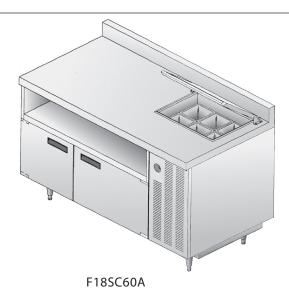

Standard Features

- 16-gauge stainless steel top construction
- · Unfinished ends,
- Interior sub-top is made of ABS plastic
- 2BF stainless steel refrigerated base interior back and bottom
- High density environmentally friendly, Kyoto
 Protocol Compliant, Non ODP (Ozone Depletion
 Potential), Non GWP (Global Warming Potential)
 polyurethane foam insulation throughout unit
- Refrigerated base fronts are made of .095" thick ABS plastic backed by rigid polyurethane water blown injection molded frames. (NO WOOD)
- Exterior drawer fronts are stainless steel with ABS plastic liner
- Snap-in dart style vinyl magnetic gasket
- Recessed black plastic handles held in with a positive lock system


- 14-gauge leg rails that run the entire length
- 6.12" adjustable stainless steel legs and bullet feet
- 8' cord and plug on self
- Environmentally friendly HFC-404A refrigerant
- Cold pan to have 2BF stainless steel interior with pans recessed 2.00"
- Cold pan is sized for two 1/6-size pans deep. Pans and adapter bars by others
- Cold pan has a on/off switch and maintains NSF7 temperatures utilizing a pressure control
- Interior base cabinet is cooled with mullion style evaporator blower coils (coated) mounted between each door/drawer section for very even air and temperature control
- Refrigerator interior maintains 36° to 40° at 100° ambient room temperature
- One year parts and 90 day labor standard warranty.

Options & Accessories

- Stainless steel end or back
- Laminate facing (full front)
- Laminate end or back
- Polyethylene or composite cutting board
- Tray rack
- Drawers in lieu of one door, 19", 27" or 32"
- Locks
- Cold pan drain
- 220V/50 cycle*
- Caster
- * Inclusion of this option will alter the electrical specifications





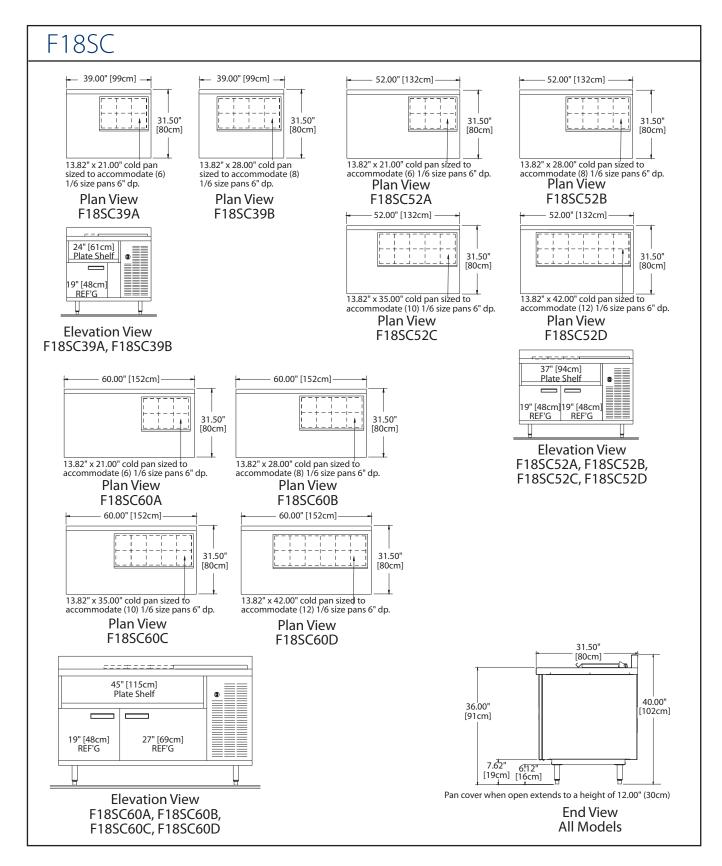






Mechanical Data

C = Condensing unit

J = Junction box w/8ft (2.4m) cord and plug

Note: Unobstructed airflow must be maintained to insure unit performance and maintain warranty.

Door Swing

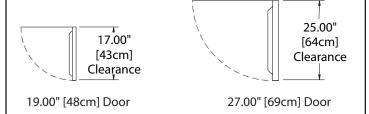

F18SC

Model	Number Of Doors	# Of Pans	Storage Ft ³	H.P.	V/Hz/Ph	Amps	Nema	Ship Weight Lbs/Kg	BTU Design Base/Rail	BTU System Cap. Base/Rail
F18SC39A	(1) 19"	6	4.11	1/4	115/60/1	10.0	5-15P	400/181	280/265	1903/745
F18SC39B	(1) 19"	8	4.11	1/4	115/60/1	10.0	5-15P	390/177	280/353	1903/867
F18SC52A	(2) 19"	6	6.94	1/4	115/60/1	10.0	5-15P	460/208	444/265	1903/745
F18SC52B	(2) 19"	8	6.94	1/4	115/60/1	10.0	5-15P	450/204	444/353	1903/867
F18SC52C	(2) 19"	10	6.94	1/4	115/60/1	10.0	5-15P	440/199	444/441	1903/971
F18SC52D	(2) 19"	12	6.94	1/4	115/60/1	10.0	5-15P	480/195	444/529	1903/1061
F18SC60A	(2) 19" & 27"	6	8.69	1/4	115/60/1	10.0	5-15P	500/227	515/265	2314/667
F18SC60B	(2) 19" & 27"	8	8.69	1/4	115/60/1	10.0	5-15P	490/222	515/353	2314/798
F18SC60C	(2) 19" & 27"	10	8.69	1/4	115/60/1	10.0	5-15P	480/217	515/441	2314/916
F18SC60D	(2) 19" & 27"	12	8.69	1/4	115/60/1	10.0	5-15P	470/213	515/529	2314/1023

Delfield reserves the right to make changes to the design or specifications without prior notice.





F18SC

31.5" (80cm) Deep Self-Contained Refrigerated Salad Top Tables

Specifications

Exterior top is constructed of one-piece 16-gauge stainless steel, with integral 2.12" (5.4cm) square nosing at the front, and 4.00" (10.2cm) high by 2" (5.1cm) deep backsplash at the rear. Top has an opening for use with 1/6 size pans. Pans and adapter bars supplied by others. Pans are recessed 2" (5cm) and rest on pan supports. Pan opening has a 20-gauge stainless steel removable cover. Temperature in top opening to maintain 33°F (1°C) to 41°F (5°C), with pans recessed 2" (5cm), at 86°F ambient room temperature, meeting NSF7 requirements.

Unit has a stainless steel plate shelf 8.4" [21.3cm] above the doors.

Exterior back and bottom to be 24-gauge galvanized steel. Exterior ends are 18-gauge galvanized steel.

Base interior has a 22-gauge stainless steel back and bottom. Interior ends and door frames are thermoformed ABS plastic. Base is insulated with 1.5" (3.8cm) of high-density foamed-in-place polyurethane.

Door(s) have a 22-gauge stainless steel exterior front, with a thermoformed ABS plastic interior liner. Door(s) have a black recessed handle and a snap-in magnetic gasket which is easily replaceable.

Base has a machine compartment, standard on the right, with condensing unit, condensate evaporator and an electrical junction box installed. Machine compartment has a louver for access to condensing unit. Blower coil(s) are located behind the door mullions and refrigerate the cabinet. HFC-404A refrigerant and maintains 36°F (2°C) to 40°F (4°C) interior cabinet temperature in the base.

Legs: Unit is mounted on 6.13" (15.6cm) high adjustable stainless steel legs.

Electrical connections are 115 volts, 60 Hertz, single phase. Unit has an 8' (2.4m) long cord and plug.









Printed in the U.S.A.



