

T

Mobile Enclosed Tray and Rack Dispensers

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

T: Mobile Enclosed Tray and Rack Dispensers

Models

T-1014	One stack	T-2020	One stack	T-1826H	One stack, heated
T-1216	One stack	T2-1014	Two stack	T-2020H	One stack, heated
T-1221	One stack	T2-1216	Two stack	T2-1221H	Two stack, heated
T-1418	One stack	T2-1221	Two stack		
T-1422	One stack	T-1221H	One stack, heated		
T-1622	One stack	T-1418H	One stack, heated		
T-1826	One stack	T-1422H	One stack, heated		



T2-1216

Standard Features

T Series Only

- Cabinet top to be 16 gauge stainless steel, welded, polished and reinforced
- Cabinet sides to be 20 gauge stainless steel
- Cabinet bottom to be 14 gauge galvanized steel
- (4) 4.00" polyolefin swivel casters (all locking)
- Dispenser platform carrier shall be 18 gauge stainless steel and removable for cleaning
- Non-marring corner gray bumpers
- Self-leveling mechanisms shall be adjustable by adding and removing stainless steel extension springs located inside the elevator housing
- One year parts and 90 day labor standard warranty

T/T2-H Series Only

- Heated dispenser has a stainless steel liner and 2.00" of fiberglass insulation
- On/off switch and 9' cord and plug standard
- Dispenser is heated with convection heated modules
- Air intake is standard with filter
- Adjustable thermostat
- Temperature between 150-170°F (66-77°C)
- One year parts and 90 day labor standard warranty

Options & Accessories

- Flange-mount feet in lieu of casters
- Special tray & rack sizes
- Six, eight, or ten hole silverware bins with plastic or stainless steel cylinders
- Additional plastic or stainless steel silverware cylinders
- Wrap-around bumpers (adds 1.75" [4.4cm] to overall length and depth)
- Fiberglass panels
- Laminate panels
- Special height

Specifications

Cabinet top shall be 16-gauge stainless steel with all corners welded, polished and reinforced with heavy-gauge channels. Cabinet exterior panels shall be 20-gauge stainless steel. Bottom shall be 14-gauge galvanized steel. Unit shall have (4) 4.00" (10.2cm) diameter polyolefin swivel casters (all locking), and non-marking gray bumpers at each corner.

Dispenser platform carrier shall be 18-gauge stainless steel and shall be removable for cleaning. Each dispenser shall be field adjustable by adding or removing stainless steel extension springs located inside the elevator housing.


The Following Applies To T/T2-H Heated Dispensers Only:

Heated dispensers shall have a stainless steel liner separated from the outer panels by 2.00" (5.1cm) of fiberglass insulation.


Unit shall be supplied with 9' (2.7m) cord and plug as shown in the specifications table on reverse. Electrical connections shall be 120 volt, 60 hertz, and single phase.

Dispenser shall have one or two convection heating modules consisting of a single 700-watt heating element and fan motor, located in the center of the interior bottom cavity. (Heated T/T2 models 1014-1422 shall have one module; larger models have two modules.) Air intake shall have a filter. Dispenser shall have an adjustable thermostat and an ON/OFF switch on the side of the unit. Unit shall maintain a temperature between 150°F-170°F (66°C-77°C).







Plan View
T Models

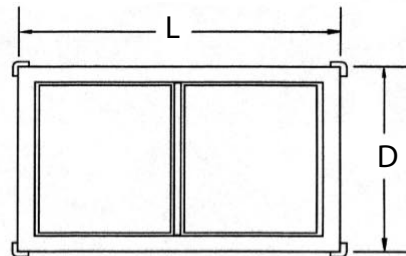

Plan View
T2 Models

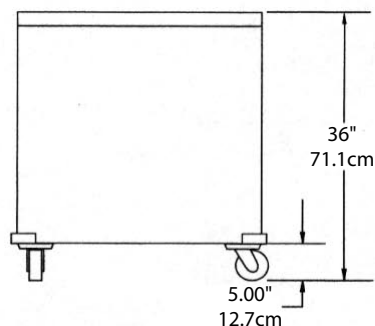

Elevation View
All Models



Right End View
All Models

Specifications

Model	Length	Depth	Maximum Tray Size	Ship Weight	Amps
T-1014	23.12" (58.7cm)	16.75" (42.5cm)	10" x 15" (25.4cm x 38.1cm)	150lbs/68kg	NA
T-1216	22.75" (57.8cm)	20.12" (51.1cm)	12" x 16" (30.5cm x 40.6cm)	153lbs/69kg	NA
T-1221	27.75" (70.5cm)	20.12" (51.1cm)	12" x 21" (30.5cm x 53.3cm)	162lbs/74kg	NA
T-1418	24.75" (62.9cm)	22.12" (56.2cm)	14" x 18" (35.6cm x 45.7cm)	153lbs/69kg	NA
T-1422	28.75" (73.0cm)	22.12" (56.2cm)	14" x 22" (35.6cm x 55.9cm)	162lbs/74kg	NA
T-1622	28.75" (73.0cm)	24.12" (61.3cm)	16" x 22" (40.6cm x 55.9cm)	177lbs/80kg	NA
T-1826	32.75" (83.2cm)	26.12" (66.3cm)	18" x 26" (45.7cm x 66.0cm)	210lbs/95kg	NA
T-2020	27.75" (70.5cm)	28.12" (71.4cm)	20" x 21" (50.8cm x 53.3cm)	175lbs/79kg	NA
T2-1014	27.75" (70.5cm)	22.12" (56.2cm)	10" x 15" (25.4cm x 38.1cm)	177lbs/80kg	NA
T2-1216	32.75" (83.2cm)	24.12" (61.3cm)	12" x 16" (30.5cm x 40.6cm)	177lbs/80kg	NA
T2-1221	32.75" (83.2cm)	29.12" (74.0cm)	12" x 21" (30.5cm x 53.3cm)	185lbs/84kg	NA
T2-1221H	27.75" (70.5cm)	20.12" (51.1cm)	12" x 21" (30.5cm x 53.3cm)	127lbs/58kg	7.0
T-1418H	24.75" (62.9cm)	22.12" (56.2cm)	14" x 18" (35.6cm x 45.7cm)	155lbs/70kg	7.0
T-1422H	28.75" (73.0cm)	22.12" (56.2cm)	14" x 22" (35.6cm x 55.9cm)	155lbs/70kg	7.0
T-1826H	32.75" (83.2cm)	26.12" (66.3cm)	18" x 26" (45.7cm x 66.0cm)	195lbs/89kg	14.0
T-2020H	27.75" (70.5cm)	28.12" (71.4cm)	20" x 21" (50.8cm x 53.3cm)	185lbs/84kg	14.0
T2-1221H	32.75" (83.2cm)	29.12" (74.0cm)	12" x 21" (30.5cm x 53.3cm)	185lbs/84kg	7.0

NOTES:

- Standard corner bumpers add 1.75" (4.4cm) to overall length and width.
- T2 models dispense two separate stacks of trays.
- T-H & T2-H models are 120 volt, 60 hertz, single phase, and include a 9' (2.7m) cord with plug.

Delfield reserves the right to make changes to the design or specifications without prior notice.