

LT

Drop-in tray and rack dispensers

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

LT: Drop-in tray and rack dispensers

Models

• LT-1014	15.75" X 22.12" single dispenser	• LT-1826	31.75" X 25.12" single dispenser
• LT-1216	21.75" X 19.12" single dispenser	• LT-2020	26.75" X 27.12" single dispenser
• LT-1221	26.75" X 19.12" single dispenser	• LT2-1014	27.75" X 21.12" double dispenser
• LT-1418	23.75" X 21.12" single dispenser	• LT2-1216	23.12" X 31.75" double dispenser
• LT-1422	27.75" X 21.12" single dispenser	• LT2-1221	31.75" X 28.12" double dispenser
• LT-1622	27.75" X 23.12" single dispenser		



LT-1418

Standard Features

- Top flange and bottom support to be 16-gauge stainless steel
- Dispenser body shall have four 14-gauge uprights, reinforced with 14-gauge stainless steel angles
- Top flange, uprights and bottom support to be integrally welded
- Dispenser platform carrier shall be 18-gauge stainless steel and removable for cleaning
- Self-leveling mechanisms shall be adjustable by adding and removing stainless steel extension springs located inside the elevator housing
- One year parts and 90 day labor standard warranty

Options & Accessories

- Special tray dispenser sizes
- Special height


Specifications

Dispenser frame uprights shall be 14-gauge stainless steel. Bottom supports shall be 16-gauge stainless steel. Top supporting flange shall be 16-gauge stainless steel with beveled outer edges. Flange, uprights and supports shall be integrally welded together.

Dispenser platform carrier shall be 18-gauge stainless steel and shall be removable for cleaning. Each dispenser shall have two self-leveling mechanisms.

Self-leveling mechanisms shall be field adjustable by adding or removing stainless steel extension springs located inside the elevator housing



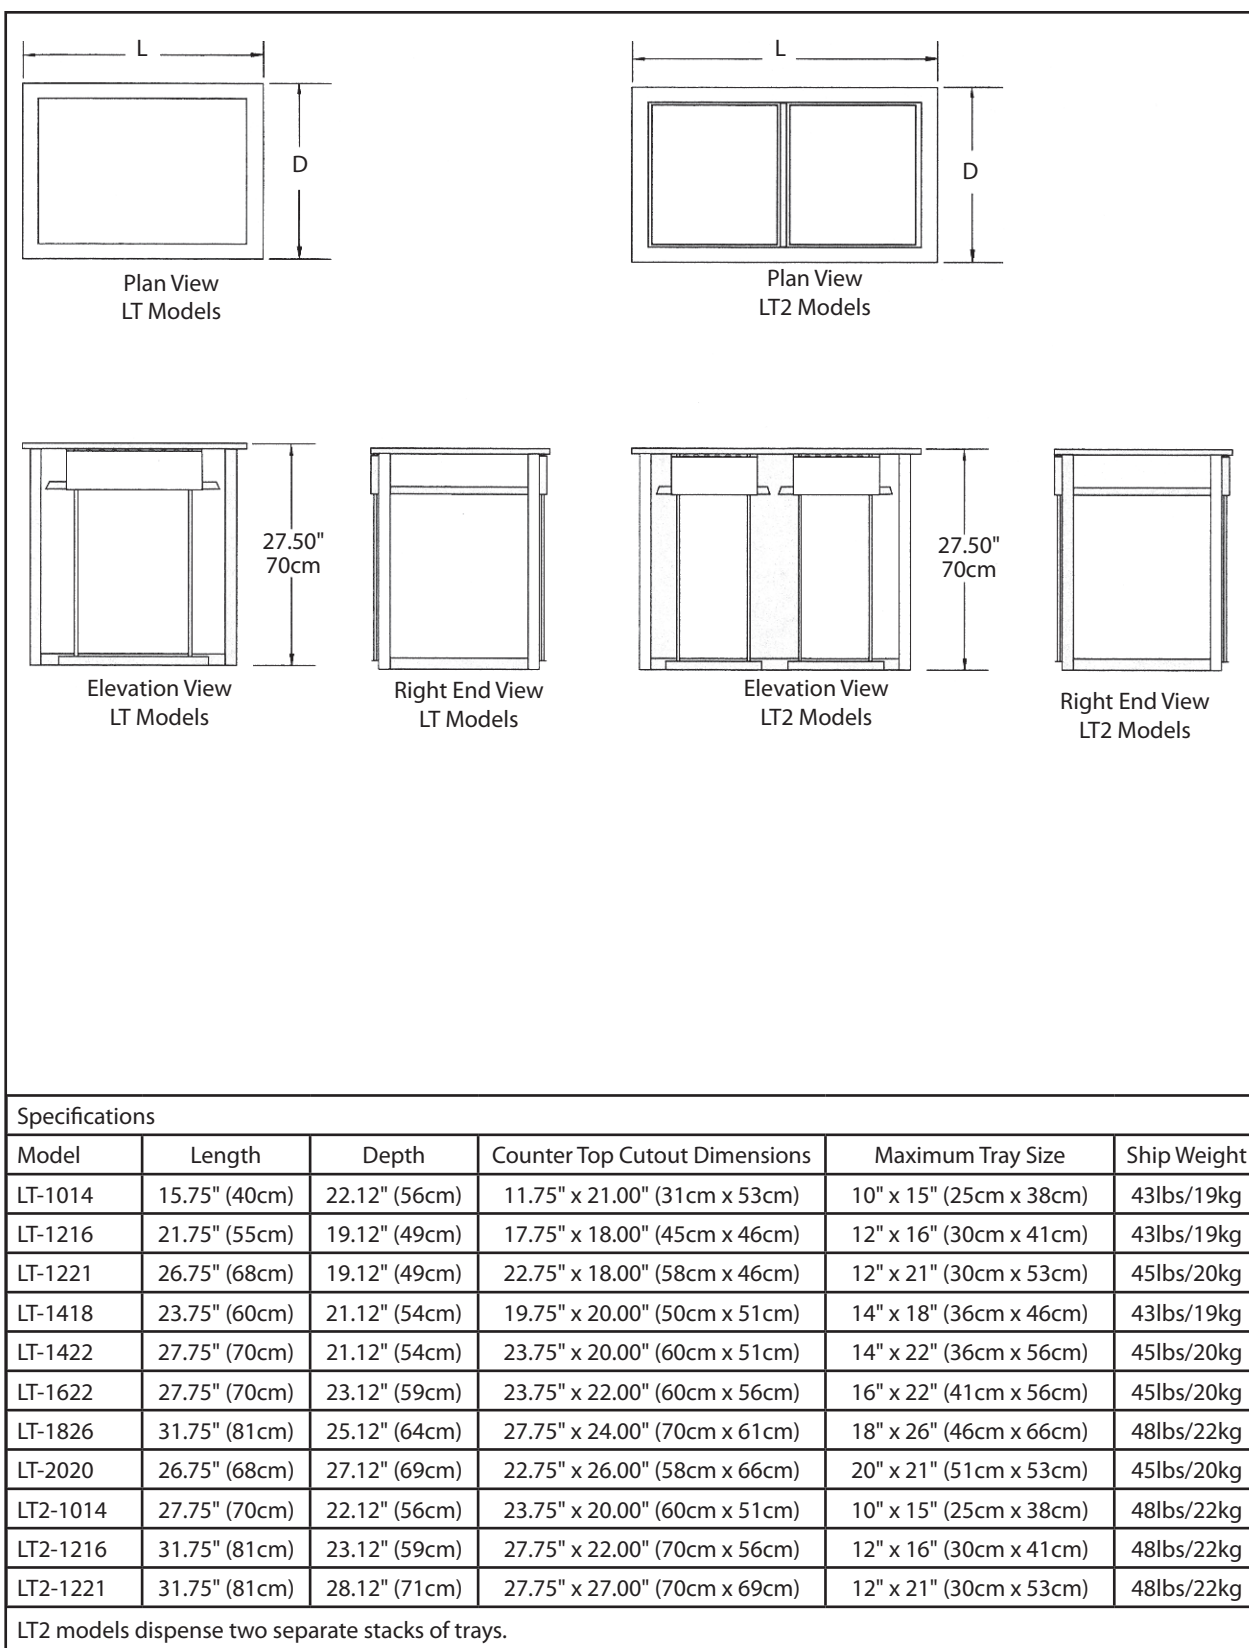

Delfield reserves the right to make changes to the design or specifications without prior notice.