

KCM

Mobile Milk Counters

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

KCM: Mobile Milk Counters

Models

- KCM-36 126 milk carton capacity, 1 lid milk counter
- KCM-50 252 milk carton capacity, 2 lid milk counter
- KCM-60 378 milk carton capacity, 3 lid milk counter
- KCM-74 504 milk carton capacity, 4 lid milk counter

*Milk capacities are based on half pint, 2.75" x 2.75" gable top cartons



KCM-50
Shown with 10" (25cm) wide
three-bar fold-down tray slide

Standard Features

- One piece, molded fiberglass pylon (base), fully rounded corners, permanent color
- All corners and center sides reinforced with galvanized bracing, laminated into the fiberglass
- 14-gauge tops
- Standard on 5" polyurethane swivel casters
- Easy to use stainless steel interlock system is standard on base and tray slides
- Enclosed bases
- A maximum 10' long cord and plug
- Top has die stamped opening(s) and is provided with hinged stainless steel removable lid(s)
- Watertight inner liner has radius corners for easy cleaning
- Equipped with a drain plumbed to a drain valve
- Refrigerated compartment is equipped with automatic self-leveling, field adjustable elevators
- Divider trays are supplied
- HFC-134A refrigerant is standard
- Environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming

Potential) polyurethane insulation keeps energy costs low

- All body cutouts reinforced with 14-gauge channel supports
- One year parts and 90 day labor standard warranty

Options & Accessories

- 12" (30cm) wide stainless steel fold-down tray slide
- 10" (25cm) wide three-bar fold-down tray slide
- 10" (25cm) wide stainless steel fold-down work shelf
- Line-up interlock device
- 10" x 17" x 4" (25cm x 43cm x 10cm) deep chrome wire baskets
- Stainless steel lid locking device with "T" handle
- 14" x 30" (36cm x 76cm) stainless steel end drop shelf
- Molded fiberglass trim strips
- 6" (15cm) high adjustable stainless steel legs in lieu of casters

Specifications

Exterior Body is seamless, one-piece molded fiberglass, having perfectly smooth exterior surface with all corners fully rounded. The fiberglass reinforced polyester is molded with permanent color. Stress points are internally reinforced.


Exterior top is constructed of 14-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners. Top has one (KCM-36), two (KCM-50), three (KCM-60) or four (KCM-74) die-stamped openings and is provided with hinged removable lids. Lids are constructed of stainless steel and have a rubber gasket seal.

Refrigerated Compartment: have water-tight inner liner constructed of 22-gauge stainless steel, with radius corners and 1.5" (4cm) of polyurethane environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) insulation. Compartment is equipped with a drain plumbed to a drain valve located in the bottom of the unit. Refrigerated compartment is equipped with automatic self leveling, field adjustable elevators. Divider trays are supplied.


Refrigeration: copper refrigeration coils are attached to outside of inner liner. Unit is refrigerated by self-contained, 115 volt, 60 Hertz, single phase hermetically sealed condensing unit with thermostatic control. Unit is wired with a 3-wire, grounded, maximum 10' (3m) 120 volt cord and plug. Refrigeration system use HFC-134A refrigerant

Casters: unit is mounted on 5" (13cm) diameter swivel casters with non-marking polyurethane tires and plate brakes. Overall height of caster assembly is 6" (15cm).




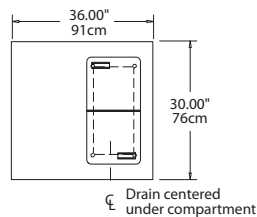


**Plan View
KCM-36**

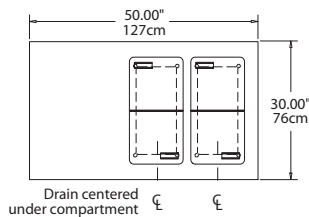


**Plan View
KCM-50**

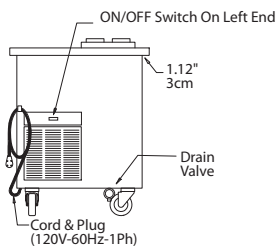


**Elevation View
KCM-36**

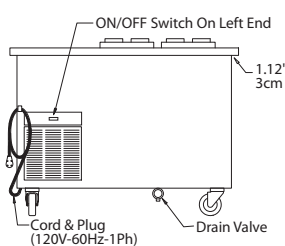


**Elevation View
KCM-50**

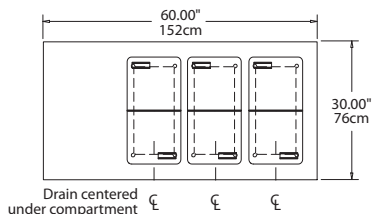


**Plan View
KCM-60**

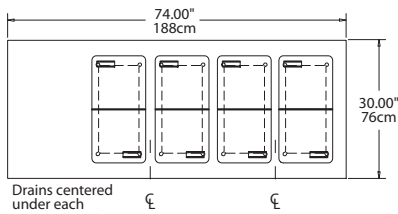


**Plan View
KCM-74**

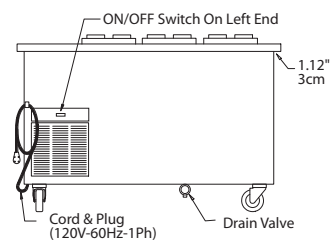

**Elevation View
KCM-60**

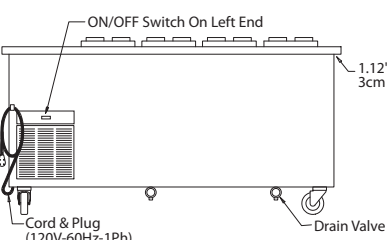

**Elevation View
KCM-74**

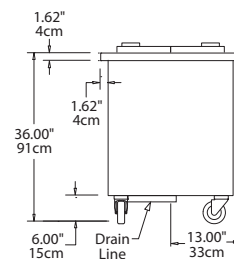

**End View
All Models**

Specifications

Model	Milk Capacity*	H.P.	V/Hz/Ph	Amps	Nema Plug	Ship Weight
KCM-36	126	1/4	120/60/1	5.0	5-15P	400lbs/181kg
KCM-50	252	1/4	120/60/1	5.0	5-15P	450lbs/204kg
KCM-60	378	1/4	120/60/1	5.0	5-15P	500lbs/227kg
KCM-74	504	1/3	120/60/1	6.0	5-15P	550lbs/250kg

*Based on 0.5 pint (237ml), 2.75" x 2.75" (7cm x 7cm) gable top cartons.

Delfield reserves the right to make changes to the design or specifications without prior notice.