

Shelleyspeed™ by Delfield

SPR-EW **Refrigerator Module, 30" height, 35" depth**

Project _____

Item _____

Quantity _____

CSI Section 11400

MODELS

- ☐ **SPR-40EW** 40" length, refrigerator module, 30" height, 35" depth
- ☐ **SPR-50EW** 50" length, refrigerator module, 30" height, 35" depth
- ☐ **SPR-64EW** 64" length, refrigerator module, 30" height, 35" depth



SPR-50EW

Unit shown with optional single tier merchandiser and graphics package



STANDARD FEATURES

- 14-gauge stainless steel top standard
- 30" counter height, 35" depth
- 9' long cord and plug are supplied standard
- 18-gauge stainless steel exterior standard
- Electrical: 120 volt, 60 cycle, single phase
- R134A refrigerant
- Removable sliding lids (two per unit) standard
- Standard on 5" diameter polyurethane swivel casters
- Stainless steel fully retractable interlock provided as standard
- Basket rack system is standard
- A wide selection of laminate colors available at no additional charge
- Laminate selection has 18-gauge galvanized base, 16-gauge coved corner supports to protect laminate
- Meets NSF2, NSF7, UL and CEC standards
- One-year parts and 90 day labor standard warranty. Additional warranties available
- Holds baskets size, 13.25" x 26.13" x 2.5" or 13.25" x 26.13" x 4.75"

OPTIONS AND ACCESSORIES

- ☐ Single tier merchandiser (Unheated)
- ☐ Double tier merchandiser (Unheated)
- ☐ 16"x35" stainless steel drop tray shelf
- ☐ Cash shelf
- ☐ Tray slides
 - V-style
 - Tubular bar
- ☐ 2" Wire basket (13.25"x26.13"x2.5")
- ☐ 4" Wire basket (13.25"x26.13"x4.75")
- ☐ Decal package
- ☐ Canopy

SPECIFICATIONS

Exterior: Exterior body is constructed of 18-gauge stainless steel (stainless models) or 18-gauge galvanized with reinforced laminate facing. 14-gauge galvanized bottom. All exterior side panels are reinforced with overlapping corners and are welded in place. All insert cutouts are reinforced with 14-gauge galvanized channel supports.

Exterior top is constructed of 14-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners with fully hemmed nosing on overhanging sides. Stainless steel fully retractable interlocks are installed on opposing corners and locks units into a complete serving system.

Interior: Refrigerated cold pan is 10" deep one-piece constructed stainless steel tank. Louvered front and rear sides are for re-circulated forced air-cooling. The tank is separated from the top by a polycarbonate thermal break and is fully insulated with foamed in place high-density polyurethane foam. A stainless

steel access panel is located in bottom of tank, allowing complete access to the evaporator coil and fan package. On/Off switch is located on the operator side in a recessed panel with a hinged cover plate. Refrigerated tank maintains NSF7 temperature requirements.

Lid: Lids are constructed of stainless steel and are foamed with polyurethane insulation. The lid thickness is 3/4". Lid handle shall be black, recessed ABS. Lids are removable without the use of tools. Lid locks are standard.

Stainless steel lid locking bar is standard. Bar has locking handle at one end and mounts to clips, which are bolted to the top of the cabinet. The locking bar extends the length of the unit. Entire assembly can be removed during the serving period.

Electrical: Electrical connections shall be 120 volt, 60 Hertz, single phase. Unit shall have a 9' long electrical cord and NEMA 5-15 plug. Cord is standard on the

operator right side of equipment. Double cord hook is located on the bottom of the unit.

Refrigeration: Refrigeration system uses R134A refrigerant and has a self-contained 120 volt, 60 Hertz, single phase hermetically sealed condensing unit. The system utilizes an evaporator coil and fan package for re-circulated forced air-cooling of product. Unit is supplied with an expansion valve and hot gas condensate evaporator.

Casters: Unit is mounted on 5" (12.7cm) diameter swivel polyurethane casters with non-marking tires and plate brakes. Casters are bolted directly to the 14-gauge bottom of the base. Overall height of caster assembly is 6.00" (15.2cm).

Styling: Units are standard with 18-gauge stainless steel exterior. Laminate is an option available at no additional charge. Decal packages and canopies are also available.



980 S. Isabella Road
Mt. Pleasant, MI 48858
www.delfield.com


Phone: 800-733-8948
Fax: 800-669-0619
Email: info@delfield.com

Approval _____


Date _____

SPR-EW SHELLEYSPEED™ REFRIGERATOR MODULE, 30" HEIGHT, 35" DEPTH


SPR-EW - Refrigerator Module, 30" height, 35" depth




Plan View SPR-40EW




Plan View SPR-50EW

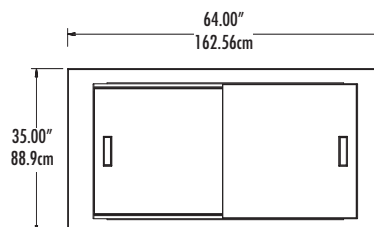


Plan View SPR-64EW





Elevation View SPR-40EW

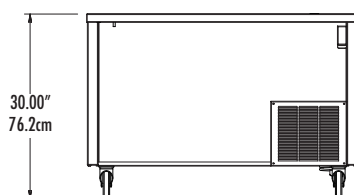



Elevation View SPR-50EW

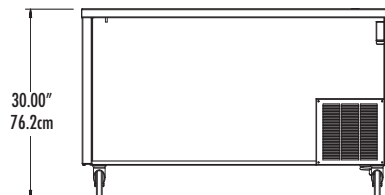

Elevation View SPR-64EW



Basket Detail

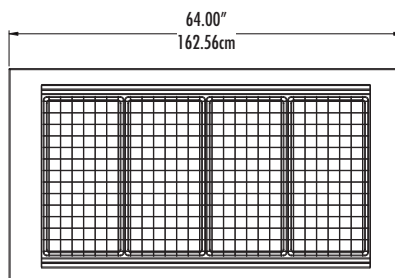

Right End View
All Models

MECHANICAL DATA:

MODEL NUMBER	TYPE	BASKET CAPACITY	STORAGE CAPACITY	VOLTAGE	AMPS	HP	NEMA PLUG	SHIP WEIGHT
SPR-40EW	REFRIGERATOR	8 (13.25X26.13X2.5) 4 (13.25X26.13X4.75)	3.37 CU FT.	120	5.0	1/5	5-15P	370
SPR-50EW	REFRIGERATOR	12 (13.25X26.13X2.5) 6 (13.25X26.13X4.75)	5.03 CU FT.	120	7.0	1/4	5-15P	525
SPR-64EW	REFRIGERATOR	16 (13.25X26.13X2.5) 8 (13.25X26.13X4.75)	6.69 CU FT.	120	7.0	1/4	5-15P	550