



SPH-E Heated Module, 30" height, 30" depth

Project _____
Item _____
Quantity _____
CSI Section 11400

MODELS

- ☐ **SPH-40E** 40" length, heated module, 30" height, 30" depth
- ☐ **SPH-50E** 50" length, heated module, 30" height, 30" depth
- ☐ **SPH-64E** 64" length, heated module, 30" height, 30" depth



SPH-50E

Unit shown without standard lid locking device



STANDARD FEATURES

- 14-gauge stainless steel top standard
- 30" counter height, 30" depth
- 9' long cord and plug are supplied standard
- 18-gauge stainless steel exterior standard
- Electrical: 120 volt, 60 cycle, single phase
- Removable sliding lids (two per unit) standard
- Standard on 5" diameter polyurethane swivel casters
- Stainless steel fully retractable interlock provided as standard
- Basket rack system is standard
- A wide selection of laminate colors available at no additional charge
- Laminate selection has 18-gauge galvanized base, 16-gauge coved corner supports to protect laminate
- Stay cool surface: Top is designed to stay below 90°, making it safe to touch
- Fin style element maintains even heating temperatures throughout the interior of the cabinet
- Meets NSF2, NSF4, UL and CEC standards
- One-year parts and 90 day labor standard warranty. Additional warranties available
- Holds baskets size, 13.25" x 20.5" x 2.5" or 13.25" x 20.5" x 4.75"

OPTIONS AND ACCESSORIES

- ☐ Single tier merchandiser (Unheated)
- ☐ Double tier merchandiser (Unheated)
- ☐ 16"x30" stainless steel drop tray shelf
- ☐ Cash shelf
- ☐ Tray slides
 - V-style
 - Tubular bar
- ☐ 2" Wire basket (13.25"x20.5"x2.5")
- ☐ 4" Wire basket (13.25"x20.5"x4.75")
- ☐ Decal package
- ☐ Canopy
- ☐ 208 Volt electrical

SPECIFICATIONS

Exterior: Exterior body is constructed of 18-gauge stainless steel side panels or 18-gauge galvanized reinforced laminate panels. 14-gauge galvanized bottom. All exterior side panels are reinforced with overlapping corners and are welded in place. All insert cutouts are reinforced with 14-gauge galvanized channel supports.

Exterior top is constructed of 14-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners with fully hemmed nosing on operator and customer sides. Stainless steel fully retractable interlocks are installed on opposing corners and locks units into a complete serving system.

Interior: Heated pan is 10" deep one-piece constructed stainless steel tank. Louvered front and rear sides are for re-circulated forced air heating. The tank is separated from the top by a polycarbonate thermal break keeping surface temperatures below 90 degrees.

Entire tank is fully insulated with foamed in place high-density polyurethane foam.

Heating System: Convected air type heating system with squirrel cage blower and on/off switch. Components include hi-limit protection circuit, (2) 900-watt fin style heating elements and a night switch. A stainless steel access panel is located in the bottom of the unit allowing complete access to the heating elements. The fan is accessible through the operator side of the control panel. Units meet NSF 4 temperature requirements.

Night switch is located on the operator side in the upper right corner behind a spring-hinged cover. On/off switch and adjustable range thermostat is located on the operator side in a recessed panel with a hinged cover plate.

Lids: Lids are constructed of stainless steel and are insulated with polyurethane foam insulation. The lid thickness is 3/4". Lid handle shall be black, recessed

ABS. Lids are removable without the use of tools. Stainless steel lid locking bar is standard. Bar has locking handle at one end and mounts to clips, which are bolted to the top of the cabinet. The locking bar extends the length of the unit. Entire assembly can be removed during the serving period.

Electrical: Electrical connections shall be 120 volt, 60 hertz, single phase. Unit shall have a 9' long electrical cord and NEMA 5-30 plug. Cord is standard on the operator right side of the equipment. Double cord hook is located on the bottom of the unit.

Casters: Unit is mounted on 5" (12.7cm) diameter swivel polyurethane casters with non-marking tires and plate brakes. Casters are bolted directly to the 14-gauge bottom of the base. Overall height of caster assembly is 6.00" (15.2cm).

Styling: Units are standard with 18-gauge stainless steel exterior sides. Laminate is an option available at no additional charge. Decal packages and canopies are also available.




980 S. Isabella Road
Mt. Pleasant, MI 48858
www.delfield.com

Phone: 800-733-8948
Fax: 800-669-0619
Email: info@delfield.com


Approval _____
Date _____

SPH-E SHELLYSPEED™ HEATED MODULE, 30" HEIGHT, 30" DEPTH


SPH-E - Heated Module, 30" height, 30" depth




Plan View SPH-40E

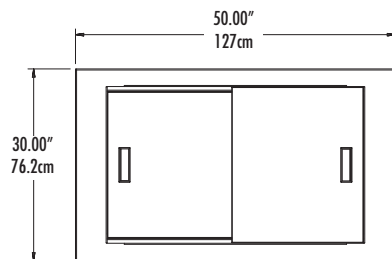


Plan View SPH-50E

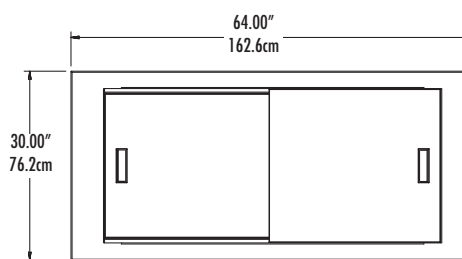


Plan View SPH-64E

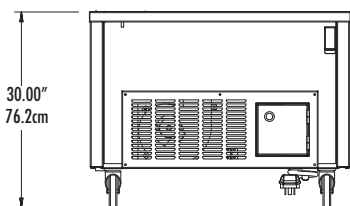




Elevation View SPH-40E

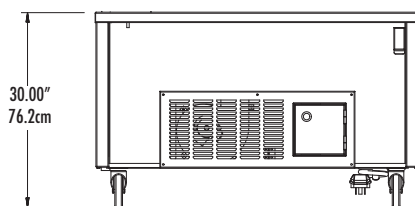


Elevation View SPH-50E

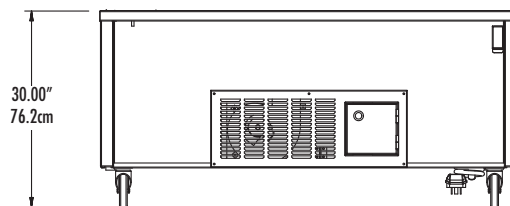

Elevation View SPH-64E

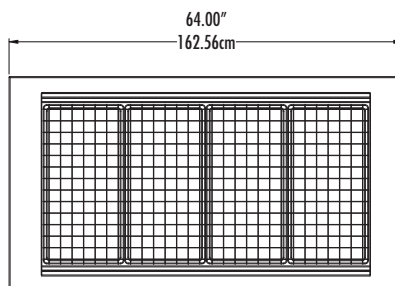

Basket Detail



Right End View
All Models

MECHANICAL DATA:

MODEL NUMBER	TYPE	BASKET CAPACITY	STORAGE CAPACITY	VOLTAGE	AMPS	WATTS	NEMA PLUG	SHIP WEIGHT
SPH-40E	HEATED	8 (13.25X20.5X2.5) 4 (13.25X20.5X4.75)	3.37 CU FT.	120	17.0	1800	5-30P	370
SPH-50E	HEATED	12 (13.25X20.5X2.5) 6 (13.25X20.5X4.75)	5.03 CU FT.	120	17.0	1800	5-30P	525
SPH-64E	HEATED	16 (13.25X20.5X2.5) 8 (13.25X20.5X4.75)	6.69 CU FT.	120	17.0	1800	5-30P	550