

SE-F/SES-F

Mobile Self-Contained Frost Top Serving Counters

Short Form Specifications

Exterior Body: Open frame construction with 16-gauge stainless steel corners: 18-gauge stainless steel full bottom shelf and stainless steel C channel front and sides for optional accent panels.

Exterior Top: Constructed of 16-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners.

Frost top: Constructed of 18-gauge stainless steel, one-piece construction and perimeter trough. Underside of frost top is sealed with refrigeration lines and insulated with high-density, closed cell polyurethane. Frost top assembly is enclosed in a galvanized steel jacket. Unit is equipped with a drain, gate valve and garden hose hookup.

Refrigeration: Uses R404A refrigerant and has a self-contained 115 volt, 60 hertz, single phase hermetically sealed condensing unit with adjustable frost top temperature control. Unit is wired with a 3-wire, grounded maximum 10' (3m) cord and plug. Unit has an on/off switch mounted on the exterior.

Casters: Units are mounted on 5" (12.7cm) diameter swivel casters with non-marking polyolefin tires and plate brakes. Overall height of caster assembly is 6" (15.2cm).

Optional Accessories and Modifications


SE-A	10" stainless steel fold-down tray slide
SE-D	8" polyethylene fold-down cutting board
SE-E	8" stainless steel fold-down work shelf
SE-F	Interlock device
SE-GF	Counter protector with full Plexiglas front
SE-HF	Two tier display with full Plexiglas front on each tier
SE-GS	Counter protector with short Plexiglas front (for self service)
SE-HS	Two tier display with short Plexiglas front on each tier (for self service)
SE-KS	Single service buffet shield
SE-KD	Double service buffet shield
SE-GD	Single tier dual display with sneeze guards
SE-HD	Double tier dual display with sneeze guards
SE-J	10" stainless steel overshelf
SE-J2	Two-tier 10" stainless steel overshelf
SE-LI	Light fixture (per tier)
SE-M	Radiant heat lamp with on/off switch
SE-Q	115/15A outlet
SE-U	14"x29" stainless steel end drop shelf
SE-V	Adjustable stainless steel leg




SE-F
(shown with optional SE-A,
fold-down tray slide)

SE-F/SES-F


Mobile Self-Contained Frost Top Serving Counters

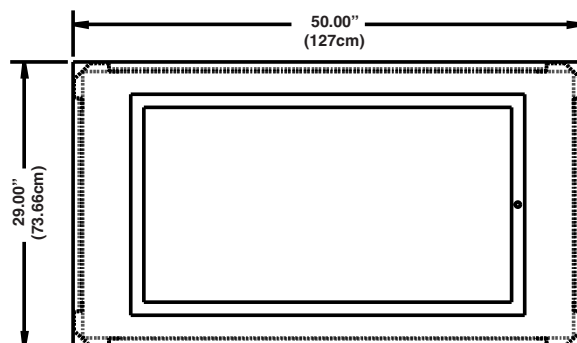

PLAN VIEW

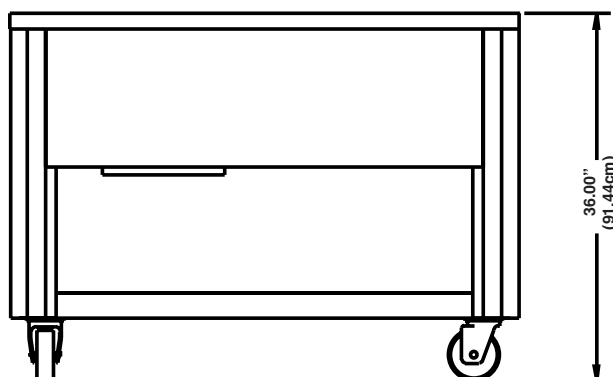

ELEVATION VIEW

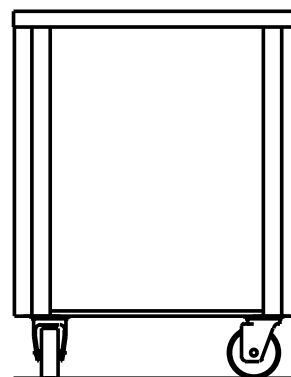

END VIEW

Mechanical Data - Standard Unit

MODEL NUMBER	Description	L	D	H	NEMA PLUG	AMP	VOLTS	H.P.	SHIP WT	FRT. CLASS
Frost Top Serving Counters										
SE-F2	Frost Top	39"	29"	36"	5-15P	7.5	115	1/4	370	100
SE-F3	Frost Top	50"	29"	36"	5-15P	7.5	115	1/4	445	100
SE-F4	Frost Top	64"	29"	36"	5-15P	7.5	115	1/4	530	100
SE-F5	Frost Top	78"	29"	36"	5-15P	8.0	115	1/3	600	100
SE-F6	Frost Top	92"	29"	36"	5-15P	8.0	115	1/3	670	100

Add S for 30" high models. (example SES-F)



The Delfield Company, 980 S. Isabella Road, Mt. Pleasant, MI 48858, U.S.A. • (800) 733-8821 • Fax (800) 669-0619 • www.delfield.com

Delfield reserves the right to make changes in design or specifications without prior notice. ©2004 The Delfield Company. All rights reserved. Printed in the U.S.A.

DSSEF 02/04