

**To select dispense method:**

**Add -S after model number for SensorSAFE™ dispensing or -L for lever dispensing.**

**Countertop models with (A) air- or (W) water-cooled icemaker**

- 110CT400A/W – 115 V, 60 Hz, integral icemaker
- 110CR400A/W – 115 V, 60 Hz, Satellite-fill icemaker
- C110CT400A/W – 220 V, 60 Hz, integral icemaker
- C110CR400A/W – 220 V, 60 Hz, Satellite-fill icemaker
- E110CT400A/W – 230 V, 50 Hz, integral icemaker
- E110CR400A/W – 230 V, 50 Hz, Satellite-fill icemaker



110CT400A-L (countertop with lever “-L” dispensing)

*Symphony*



Countertop model with Satellite-fill icemaker

Countertop ice and water dispensers with removable air- or water-cooled icemaker in top of dispenser. Stainless steel exterior with plastic trim. Stainless steel frame. Water station standard. Up to 90 lbs (41 kg) storage. Produces approximately 400 lbs (181 kg) of Chewblet compressed nugget ice in a 24-hour period.

**Add -S after model number for SensorSAFE dispensing or -L for lever dispensing.**

**Convenient, sanitary, user-friendly dispensing**

- Labor-saving, sanitary automatic load
- Available with lever or infrared SensorSAFE dispensing
- Quick shut-off reduces the amount of wasted ice
- High-quality Chewblet compressed nugget ice is slow melting, easy to chew
- Clear chute focuses ice into cups, pitchers, carafes, ice bags

**SensorSAFE dispensing option offers even more sanitation and convenience**

- Infrared sensing eliminates container to dispenser contact, reduces chance of cross-contamination
- Easy, one-hand filling of containers
- SensorSAFE not recommended for use with clear containers or for applications in direct sunlight

**Space-saving, attractive design**

- 24.5" (623 mm) width requires less space than competitive models of similar capacity
- Zero side clearance required for ventilation
- Softly-rounded European styling
- High-quality stainless steel exterior with plastic trim
- Attractive, user-friendly graphics

**Environmentally friendly, high performance Maestro icemakers**

- State-of-the-art R404A icemaker automatically loads dispenser with 400 lbs (181 kg) of ice each day
- Stainless steel evaporator and auger
- Energy and water efficient
- Quiet production; no noisy harvest cycles
- Satellite-fill™ icemakers can be located up to 20 ft (6 m) from dispenser; remove heat, noise and bulk from customer area

**Warranty**

- 2 years parts and labor
- 5 years compressor parts

**Accessories**



- Chilled water option (item# AFH20CHIL110)
- Water filter kit (item# 00130229)
- Base stand (for models 110CT400A/W, C/E110CT400A/W) (item# AF110BASESTD)
- SafeCLEAN™ environmentally friendly icemaker cleaner (item# 00132001)
- Slide-out track for Satellite-fill icemakers (item# AFGSLIDER400A (air-cooled icemakers) and item# AFGSLIDER400W (water-cooled icemakers))

JOB: \_\_\_\_\_

ITEM: \_\_\_\_\_

# 110 Series

# Symphony™ countertop ice and water dispensers with Maestro™ Chewblet® ice icemaker

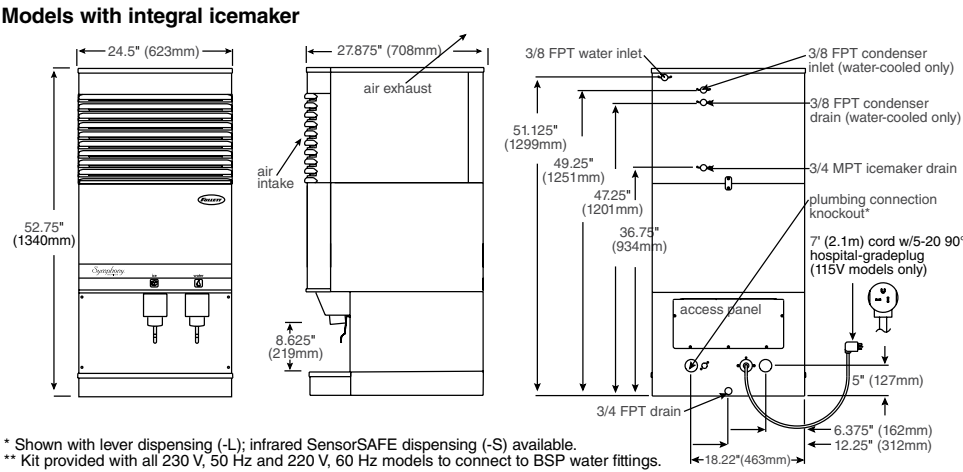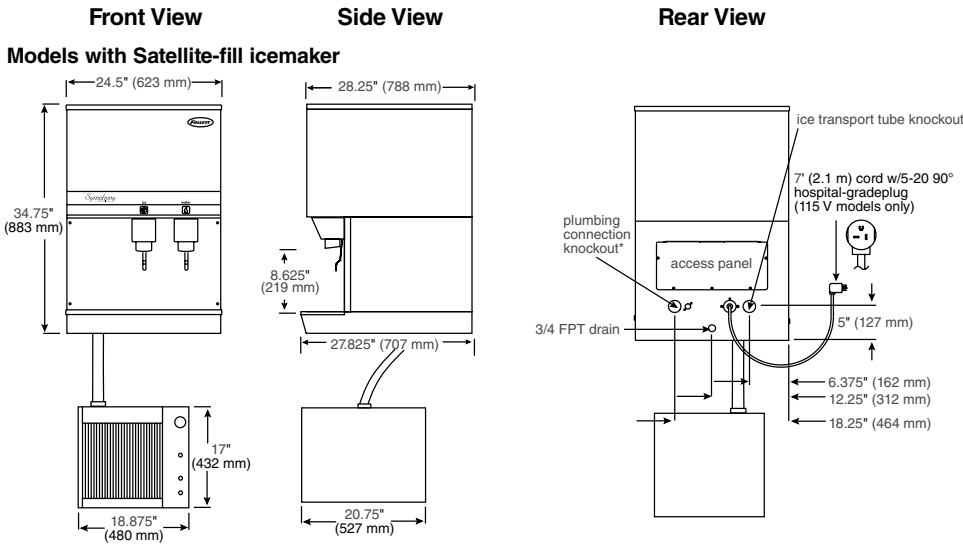

## Connections

- Utilities connect through back or bottom. Back entry shown.
- Supplied 2" (51 mm) duct and louver must be installed for undercounter Satellite-fill icemaker installations

## Ice Production

Air-cooled icemaker capacity/24 hrs.

		Ambient Air Temperature °F/°C						
		F	60	70	80	90	100	
Inlet Water Temperature °F/°C	F	50	510	454	397	335	273	lbs.
	C	10	232	206	180	152	124	kg.
60	F	16	482	435	389	329	270	lbs.
	C	16	219	198	177	150	123	kg.
70	F	21	454	417	380	323	266	lbs.
	C	21	206	190	173	147	121	kg.
80	F	27	424	385	347	297	247	lbs.
	C	27	193	175	158	135	112	kg.
90	F	32	394	354	313	270	227	lbs.
	C	32	179	161	142	123	103	kg.

Water-cooled icemaker capacity/24 hrs.

		Condenser Water Inlet Temperature °F/°C						
		F	60	70	80	90	100	
Inlet Water Temperature °F/°C	F	50	451	447	442	437	428	lbs.
	C	10	204	202	200	199	194	kg.
60	F	16	423	413	409	399	394	lbs.
	C	16	192	187	185	181	179	kg.
70	F	21	394	390	380	371	361	lbs.
	C	21	179	177	172	168	163	kg.
80	F	27	371	361	352	342	333	lbs.
	C	27	168	163	160	155	151	kg.
90	F	32	352	342	333	323	309	lbs.
	C	32	160	155	151	146	140	kg.

## Energy consumption

KWH per 100 lbs (46 kg) ice†	
Air-cooled	5.7
Water-cooled	5.5

† Air temp. 90 F (32 C); water temp. 70 F (21 C)

## Heat rejection data

Model	Heat rejected in BTU/hr	
	to air	to water
Air-cooled	5000	N/A
Water-cooled	1400	3600

## Water flow requirements for water-cooled condensers

Water Temp. °F/°C	70/21
Water Flow: Gallons/100 lbs of ice Liters/46 kg of ice	73 276

## Water consumption

12.6 gal (48 L) of potable water usage per 100 lbs (46 kg) of ice.

**Approximate shipping weight**  
290 lbs (132 kg)

\* Shown with lever dispensing (-L); infrared SensorSAFE dispensing (-S) available.  
\*\* Kit provided with all 230 V, 50 Hz and 220 V, 60 Hz models to connect to BSP water fittings.

## Clearances

	Models with integral icemaker		Models with Satellite-fill icemaker	
	Air-cooled	Water-cooled	Air-cooled	Water-cooled
<b>Required for ventilation</b>	6" (153 mm) top	N/A	6" (153 mm) right side of icemaker	N/A
<b>Recommended for service</b>	12" (305 mm) top	12" (305 mm) top	12" (305 mm) top of icemaker & disp.	12" (305 mm) top of icemaker & disp.

See Dispenser Detail Sheet, form# 2075, for important installation information.

## Electrical

Model number	Electrical connection	Dispenser amperage	Icemaker amperage	Required circuit
110CT400A/W	115 V, 60 Hz, 1 phase	14 amps	N/A	20 amps
C110CT400A/W*	220 V, 60 Hz, 1 phase	6.5 amps	N/A	15 amps
E110CT400A/W*	230 V, 50 Hz, 1 phase	6.5 amps	N/A	15 amps
110CR400A/W	115 V, 60 Hz, 1 phase	4 amps	11 amps	20 amps
C110CR400A/W*	220 V, 60 Hz, 1 phase	1.5 amps	5 amps	20 amps
E110CR400A/W*	230 V, 50 Hz, 1 phase	1.5 amps	5 amps	20 amps

It is preferred that circuit be protected by a GFCI breaker.

7 ft (2.1 m) cord and NEMA 5-20 hospital-grade plug provided with each dispenser. If local code requires hard-wiring, separate disconnects also required.

\* Cord only. Ensure wiring is in accordance with all local codes.

Maestro, SafeCLEAN, SensorSAFE and Symphony are trademarks of Follett Corporation. Chewblet and Follett are registered trademarks of Follett Corporation, registered in the US. Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.