

Job Name : _____

Item Number: _____

1/3 HP Remote Draft Beer Line Chiller

LC85 DRAFT-PRO




LC85



STANDARD FEATURES

- Modular lift-out refrigeration system for easy in-field service
- High capacity refrigeration and recirculation for high volume and remote long distance installations
- CFC-free R134a refrigerant
- Light-weight, roto-molded glycol bath with drain
- Polyurethane foamed-in-place insulation

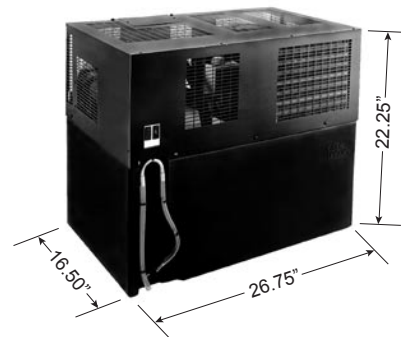

Perspective view
with dimensions

NOTE: Clearance of 12" required around unit for maximum air flow and 20" overhead clearance for maintenance

SPECIFICATIONS

Dimensions

- Height - 22.25" (56.5 cm)
- Width - 26.75" (67.9 cm)
- Depth - 16.50" (41.9 cm)

Electrical

- 115V, 1 phase, 60 Hz, 10.8 full load amps
- 230V, 1 phase, 50 Hz, 5.8 full load amps
- Dedicated 15 amp circuit is required
- Includes a 6-foot grounded cord

Refrigeration

- 1/3 HP R134a lift-out high temperature condensing unit

Glycol Bath Capacity

- 14.80 U.S. gallons (56.0 l)

Maximum Distance to Taps

- 125 ft (38.1 m)

Circulating Pump

- 60 gph (227 lph)

Circulating Motor

- 1/3 HP (.25 kW)

Shipping Weight

- 107 lbs (48.5 kg)

Operating Weight

- 225 lbs (102 kg)

Shipping Cube

- 9.5 cu ft (.28 cu m)

Options

- 4" Adjustable legs (up to 5-1/2")