



Specifications

Electrical

- 120V, 1 phase, 60 Hz, 5.0 full load amps
- Separate 15 amp circuit is required
- Includes a 6-foot grounded cord
- Available with 220V, 1 phase, 50Hz electrical

Refrigeration

• 1/4 HP, R134a refrigerant

Plumbing

· Automatic condensate evaporator. No drain connection required

Lettuce Bin

- · Removable plastic bin included
- **Operating** Range
- 35° F to 40° F

Legs (Optional)

• 4" stainless steel legs with adjustable bullet feet

Project:		AIA#
Item #:	Qty:	SIS#
Model #·		

Lettuce

LC

Standard Features


- · Self-contained forced air refrigeration system for uniform cooling of product
- Automatic condensate evaporator
- Automatic defrost timer
- All stainless steel interior construction
- · Roto-molded plastic foamed-in-place insulated door and lettuce chute
- · Stainless steel exterior construction with galvanized steel back and bottom
- · Removable plastic lettuce bin (divider for bin and extra bins available)
- CFC free foamed-in-place insulation
- · Removable condenser air inlet filter for easy cleaning
- · Lift-up door with plexi-glass window
- Bracket for wall mounting
- 4" adjustable legs available
- Ten-foot grounded cord and plug provided

Materials

- 22 gauge stainless steel parts include: interior and exterior front, sides, and condensing unit compartment cover
- 22 gauge galvanized steel parts include: back
- 16 gauge galvanized steel parts include: condensing unit floor and exterior bottom
- Roto-molded plastic parts include: lettuce bin, door and lettuce chute

	Glastender, Inc. • 5400 North Michigan Road • Saginaw, MI • 48604-9780	Approval/Notes:
	989.752.4275 • 800.748.0423 • Fax 989.752.4444	
	www.glastender.com	
	Specifications subject to change without notice. For current specifications please visit our website.	
Printed in USA		Rev. 10-17-07

Dimensional Information

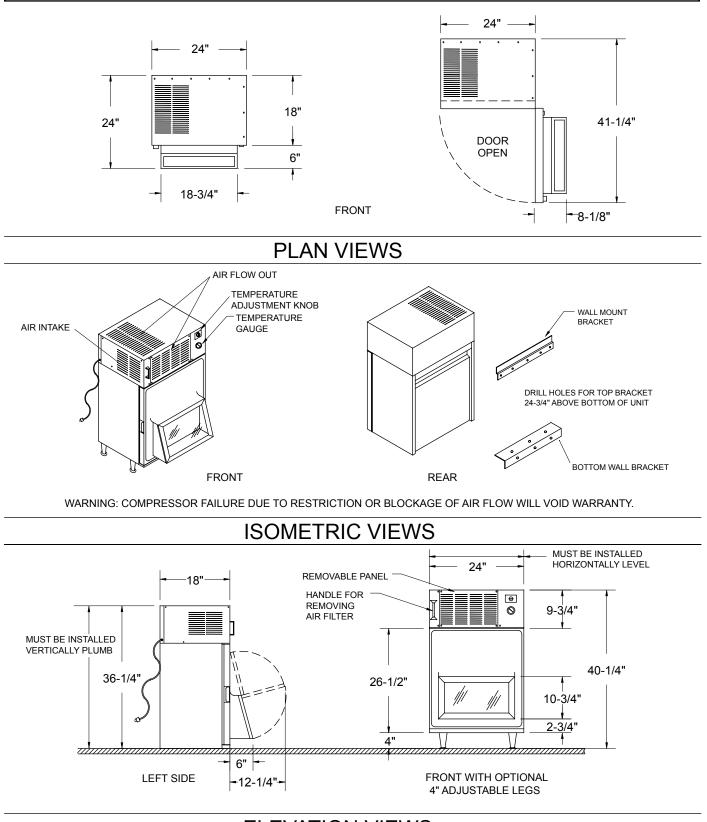

ELEVATION VIEWS



5400 North Michigan Road • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com