Humidified holding cabinet Countertop

MODEL HCH-932 two-drawer HCH-930 three-drawer



Heated Holding Cabinet, humidified countertop Model HCH-930 shown with electro-mechanical controls.

General Information

Henny Penny humidified holding cabinets are designed to hold a wide range of cooked foods at safe temperatures for long periods of time prior to serving without sacrificing freshness or presentation.

The 930 series space-saving countertop holding cabinets provide separate environments to keep popular items handy for immediate service.

With longer holding periods, operators can cook ahead of time and serve on demand during peak periods. Countertop design makes items accessible for servers without interrupting work flow.

Humidified environment allows you to hold a wide variety of items,

Auto-fill water supply and level

Wire basket inserts allow even.

· Vinyl insulated drawer handles.

• Crumb/drip tray for easy cleanup.

convection airflow.

• Adjustable leveling feet.

control.

including baked potatoes, breakfast sandwiches and other items that dry out easily. Automatic water fill and level control are standard.

Units are welded stainless steel. Drawers and liners are single piece welded stainless steel construction and roll smoothly on tough Rulon slide bearings. Drawers close completely and seal against hightemperature gaskets.

Cabinets are fully insulated for energy efficient operation.

Control panel features easy-to-read temperature dial and indicator lights for power, heat, and water.

Standard Features

- Durable, welded stainless steel construction.
- Single piece welded drawer and liner.
- Fully insulated cabinet.
- Snug-fitting drawers on tough, low-friction Rulon bearings.
- Positive drawer closure.
- High temperature drawer gasket.
- Electro-mechanical controls feature:
 - Adjustable thermostat.
 - Automatic water level control.
 - Power, water, and heat indicator lights.


	APPROVED AS NOTED		
AUTHORIZED S	DATE		



Henny Penny Corporation						
PO Box 60 Eaton OH 45320 USA						
+1 937 456.8400	800 417.8417					
+1 937 456.8434 Fax	800 417.8434 Fa					
www.hennvpennv.com						

Humidified holding cabinet

MODEL HCH-932 two-drawer HCH-930 three-drawer

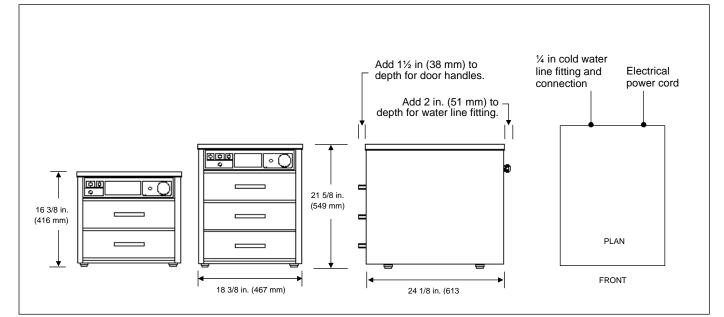

Dimensions

HCH-932 two-drawer HCH-930 three-drawer Height: 16 3/8 in. (416 mm) 21 5/8 in. (549 mm) Width: 18 3/8 in. (467 mm) 18 3/8 in. (467 mm) Depth: 24 1/8 in. (613 mm) 24 1/8 in. (613 mm)

Required clearances

4 in. (102 mm) at rear for water line connection

Crated dimensions

29 3/4 in. (756 mm) Length: Depth: 23 3/4 in. (603 mm) 28 1/2 in. (724 mm) Height: Volume: 11.7 cu. ft. (0.33 m³)

Crated weight

HCH-932 two drawer: 118 lb. (54 kg) HCH-930 three drawer: 133 lb. (60 kg)

Heating: Thermostat controlled, 160-210°F (71-99°C)

Water connections: 1/4 in. o.d. cold water line

Humidity: Water pan, auto-fill

Bidding Specifications

- Provide Henny Penny Model HCH-930 three-drawer or HCH-932 two-drawer countertop Humidified Holding Cabinet. Units are designed to hold small quantities of hot foods at safe temperatures in separate environments.
- Cabinet exterior is constructed of highquality, welded stainless steel. Drawer and

Capacity HCH-932 2 wire basket inserts (included)

- 11 ³⁄₄ x 19 ¹⁄₄ x 1 5/8 in. (298 x 489 x 41 mm)
- 3 wire basket inserts (included) 11 ³⁄₄ x 19¹⁄₄ x 1 5/8 in. (298 x 489 x 41 mm)

Laboratory certifications



Volts	Phase	Cycle/Hz	Watts	Amps	Wire	
120	1	50/60	842	7.0	2+G	
230	1	50	770	3.3	1NG	
240	1	50/60	842	3.5	2+G	
Power cord supplied for 120V, 230V units 120V and 240V HCH-930. Plug supplied for 120V NEMA 5-15P						

and 240V HCH-930. Plug supplied for 120V NFMA units, only,

power, water and heat indicator lights.

- Unit features auto water fill feature and is equipped with fixture for 1/4 in. cold water connection.
- · Unit is equipped with wire drawer basket, crumb tray and adjustable leveling feet.



www.hennypenny.com

Continuing product improvement may subject specifications to change without notice.

HCH-930

Electrical

liner are single piece, welded stainless steel.

Drawer rolls on durable Rulon[®] bearings.

temperature drawer gasket and positive

Unit shall be equipped with electro-

•

closure.

Cabinet is fully insulated and features high-

mechanical controls that include adjustable thermostat, automatic water level control and