



ITEM NO.

MODEL NO.

61201-35 5/99  
Printed in U.S.A.

# NAVY USN-50 Deep Fat Fryer

**50 LB. FAT CAPACITY  
15" WIDE**

**Exceptional durability, impressive production capabilities . . . and simple to use!**

- Only 15 inches wide – save valuable floor space. With a well depth of 14", a 15 degree ship roll still allows 2" of freeboard for safety.
- Durable – stainless steel exterior. Easy to clean.
- Simple controls – Solid State control knobs; indicator lights for power, heat and over-temperature, on/off switch; Automatic reset "over-temperature" safety thermostat.
- Easy and safe to operate oil drainage provides convenient elimination of oil.
- Flanged leg available.
- Switches – Navy safety features including: negative bias overtemp thermostat, back-up circuit breaker and Navy approved test switch.
- Easy servicing from the front.
- Simple to use. Minimal training required.
- High capacity – 125 pounds of frozen to done french fries per hour. Quick recovery!
- Easily interchangeable with a Hobart footprint. Lang's fryer is convenient for replacement of older equipment and needs no additional modification.
- Maximizes tight galley spaces with high production, durable equipment.
- Preheats from room temp to 350°F in just seven minutes.



**Model USN-50**

**OVERALL/FLOOR MODEL:**

- 40"H x 31 $\frac{1}{4}$ "D x 15"W (w/o legs)  
(1016 x 793.75 x 381)

**KW:**

- 22.0

**VOLTAGE:**

- 440V

**OPTIONS:**

- Quick disconnect drain pipe
- Smother Cover

**LANG MANUFACTURING COMPANY**


6500 Merrill Creek Parkway  
Everett, WA 98203  
TOLL FREE (800) 882-6368  
PHONE (425) 349-2400  
SERVICE (800) 224-5264  
FAX (425) 349-2518

Overall dimensions represent product footprint only.




## SPECIFICATIONS FOR NAVY FAT FRYER

### MODEL USN-50

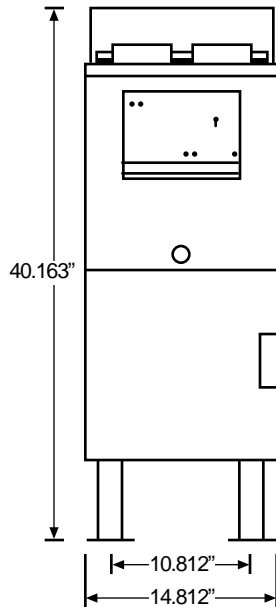

FRONT VIEW

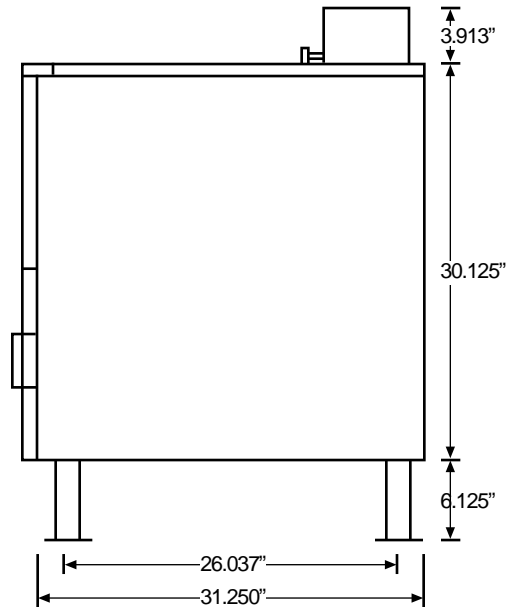

SIDE VIEW

**NOTE:** All fryers are supplied with an auxiliary power interrupt terminal, which when connected, automatically shuts off primary power to the fryer. This connection *does not* require an additional 120V circuit.

ELECTRICAL DATA							
ELECTRIC FRYER							
MODEL	THREE PHASE LOADING			TOTAL K.W.	NOMINAL AMPS PER LINE		
	K.W. PER PHASE				THREE PHASE		
					440 VOLTS		
	L1-L2	L2-L3	L3-L1		L1	L2	L3
USN-50	11.0	0	11.0	22	43.3	25	25

WHEN ORDERING SPECIFY VOLTAGE PHASE

Specifications subject to change without notice.

**LANG MANUFACTURING COMPANY**