Insta-Therm™

Models:

16001

16003

16005



Standard Features:

- Heavy-duty stainless steel construction
- Contact actuated for energy savings
- Simple On/Off control
- Indicator light on cook and server side
- No pre-heat time required heats instantly
- Quartz heating elements
- Small foot print

Description:

The Merco® Insta-Therm™ is the perfect solution for adding the finishing touches to entrees and appetizers. No preheating required as *Insta-Therm* is contact actuated for energy savings and heats instantly. The menu applications are endless with Insta-Therm from Merco.

Stainless Steel Construction: sturdy, sanitary, and reliable for years of dependable service.

Product Opening: large 4" x 18" product opening on both sides for easy access and pass-through applications.

Contact Actuated: the unit activates upon contact of product resulting in energy saving for operators.

Indicator Lights: indicator lights on both cook and server side illuminate when elements are on.

Small Footprint: allows the unit to fit in small operations without taking up valuable countertop space.

Electrical Requirements: Model is available in 208 Volt, 60Hz, 2340 Watts at 11.25 Amps. NEMA 6-20P plug incuded.

CE approved units available in 230 Volts, 50 Hz, 2280 Watts, at 9.91 amps. CEE 7/7 plug included.

Bid Spe	ifications for Merco® Insta-	
Therm ¹	The Insta-Therm shall be Merc	0
model _	rated at watts,	
\	olts. single phase	










1111 North Hadley Road P.O. Box 1229 Fort Wayne, Indiana 46801-1229 Tel 1.260.459.8200 Fax 1.260.436.0735 E mail info@mercosavory.com



Dimensions:

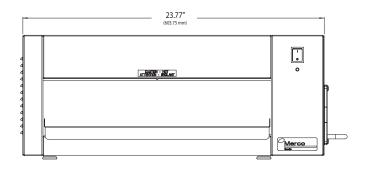



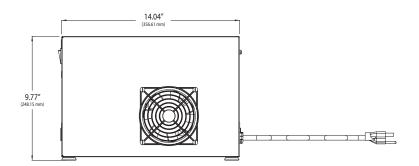

Merco® Guarantee:

Merco equipment is guaranteed to be free from quality problems in materials and workmanship for a period of one (1) year parts and labor from date of purchase. Quartz heating elements carry a ninety (90) day warranty against burnout (not breakage) from date of purchase of equipment.

Merco Insta-Therm

Part #	Model #	Volts	Amps	Watts	Hz	Phase	Cord Length	Plug Type	Width	Depth	Height
16001*	IT-18	208	11.25	2340	60	Single	6′	NEMA 6-20P	23.77" (603.7mm)	14.04" (356.6mm)	9.5" (241.3mm)
16003**	IT-18	230	9.91	2280	50	Single	6′	CEE 7/7	23.77" (603.7mm)	14.04" (356.6mm)	9.5" (241.3mm)
16005	IT-18	208	11.25	2340	60	Single	6′	NEMA 6-20P	23.77" (603.7mm)	14.04" (356.6mm)	9.5" (241.3mm)

* 50% Stand-by Energy Saving Mode. ** CE Approved unit.

Designs and specifications subject to change without notice.