

Holding Cabinet

Model:

☐ 86007
 ☐ 86007 - CE
 ☐ 86009
 ☐ 86009 - CE



Standard Features:

- Conduction heat.
- Independent upper and lower heating system.
- Cool touch insulation.
- Small footprint.
- Stainless steel construction.
- Digital display.
- Programmable menu.
- Removable back for pass-through applications.

Optional Features:

- Double handled pan for pass-thru applications.
- Under shelf mounting brackets.
- Choice of digital control location - available on left or right side.

Description:

Merco Holding Cabinet keeps food hot, fresh and ready for easy assembly! Allows more flexibility in holding options for greater menu variety – go ahead, prepare and hold food prior to serving. Stack the units up to 3 high or line them up side by side. Mounting brackets available for under shelf configurations. The easy to maintain design and simple operation features reduced employee time spent on cleaning and training; increasing customer satisfaction by providing higher product quality in a shorter amount of time.

Specifications:

Conduction Heat – directly transfers heat from both top and bottom with minimal heat loss. Provides consistent quality, improved freshness and extended hold times.

Cool Touch Insulation – keeps exterior surfaces cool while food is held at proper serving temps.

Small Footprint – each unit holds one 1/3 size polycarbonate bin, small footprint allows cabinet to fit almost anywhere.

Modular – stackable up to three high with optional mounting brackets for under shelf mounting (vertically or horizontally) allows operators to customize for any design.

Pass-Through Applications - Standard features include removable back for pass-through applications. Double-handled pans optional.

Stainless Steel Construction – sturdy, sanitary and reliable.

Programmable Menu – easy to use symbols on control panel. Digital time and temperature display.

Electrical Requirements:

Model is available in 120 Volt; 60 Hz, 360 Watts at 3 Amps. NEMA 5-15P plug included. CE approved units available in 230 Volt, 50 Hz, 360 Watts, at 1.6 amps. BS1363/A plug included.

Bid Specifications for Holding Cabinets:




The Holding Cabinet shall be Merco model _____ rated at _____watts, and _____volts, single phase AC.





Models:

☐ 86007
 ☐ 86007 - CE
 ☐ 86009
 ☐ 86009 - CE

Dimensions: (inches/mm)

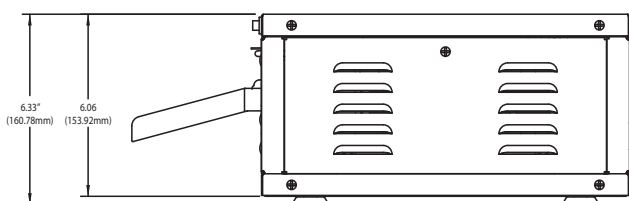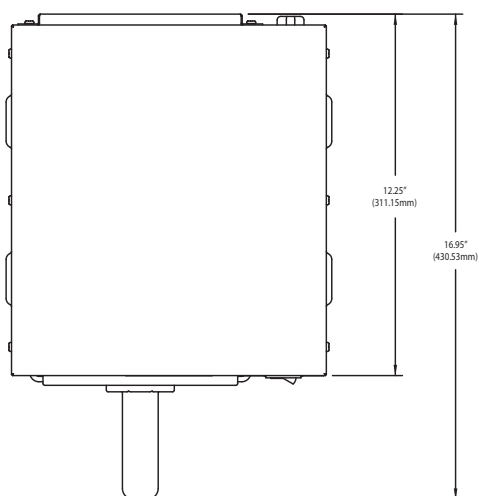

Horizontal Rack Mounting

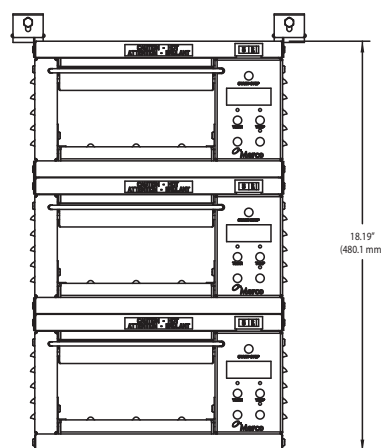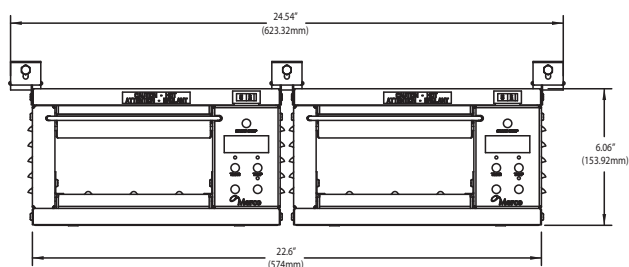

Vertical Rack Mounting

Merco® Guarantee:

Merco equipment is guaranteed to be free from quality problems in materials and workmanship for a period of one (1) year parts and labor from date of purchase, or eighteen (18) months from date of shipment from factory, whichever comes first.

| Part Number | Description | Volts | Amps | Watts | Hz | Phase | Cord Length | Plug Type | Width inch/mm | Depth inch/mm | Height inch/mm |
|-------------|--------------------------|-------|------|-------|----|--------|-------------|------------|---------------|---------------|----------------|
| 86007 | MHC-1 Left Side Control | 120 | 3.0 | 360 | 60 | Single | 6' | NEMA 5-15P | 12.25/311.15 | 11.0/279.40 | 6.5/165.1 |
| 86007-CE | MHC-1 Left Side Control | 230 | 1.6 | 360 | 50 | Single | 6 | BS 1363/A | 12.25/311.15 | 11.0/279.40 | 6.5/165.1 |
| 86009 | MHC-1 Right Side Control | 120 | 3.0 | 360 | 60 | Single | 6' | NEMA 5-15P | 12.25/311.15 | 11.0/279.40 | 6.5/165.1 |
| 86009-CE | MHC-1 Right Side Control | 260 | 1.6 | 360 | 50 | Single | 6' | BS 1363/A | 12.25/311.15 | 11.0/279.40 | 6.5/165.1 |

Designs and specifications subject to change without notice.

Models:
☐ 86007
☐ 86007 - CE
☐ 86009
☐ 86009 - CE