

# Microcook HD1025

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400 \_\_\_\_\_  
 Approval \_\_\_\_\_  
 Date \_\_\_\_\_

Microcook HD1025

## Models

☒ HD1025



## Standard Features

- 1025 Watts power output (IEC 705 Rating)
- Ergonomic digital touch pad control and easy to clean interior cavity.
- Full access to the oven cavity with the space saving, removable lift up door.
- Fully programmable, with up to 10 programs.
- User friendly operation.
- Energy saving stand-by mode.

## Options & Accessories



## Specifications

A fully commercial heavy duty, stainless steel 1025 Watt microwave oven equipped with the unique lift-up door.  
 Ideally suited for individual portions or small batch cooking.

- In-built diagnostics – easy to use fault finding card.
- Vending model available.
- Quality assured BS EN ISO 9001 accreditation.



Allow a minimum of 50mm clearance to sides, top and rear to allow air to circulate freely

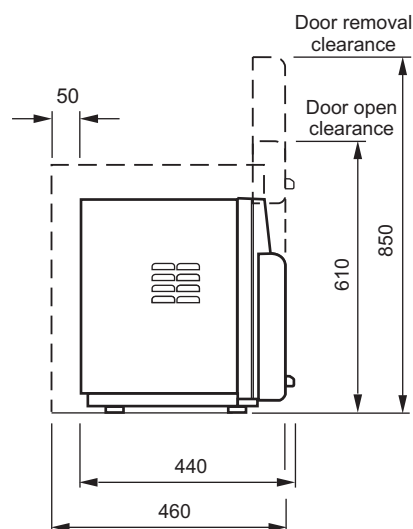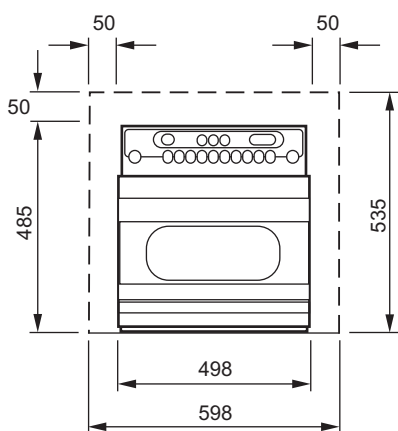

All dimensions in mm

## DIMENSIONS

MODEL NO.	OVERALL SIZE mm			NET WEIGHT
	HEIGHT	WIDTH	DEPTH	
HD1025	485mm	498mm	440mm	40.0kg Nett 44.5kg Gross

Capacity 28.5 litres

Internal Dimensions mm ( HxWxD ) 200 x 390 x 365

## POWER REQUIREMENTS

Power input 1.75kW maximum

ELECTRICAL SUPPLY			
Country	Voltage/Freq.	Arrangement	Connections Used
UK	230-240V 50Hz	Single Phase	1P N & E
EU	220-230V 50Hz	Single Phase	1P N & E

Moulded 13 Amp plug BS 1363A (UK only)

For oven models suitable for a 60Hz electrical supply, please contact the sales office.

## MICROWAVE POWER

Output 1025 Watts (IEC705) @ 100%

Power Levels 100%, 50% & Defrost

Safety System Agency approved monitored interlock door system.

## SAFETY FEATURES

Microwave safety interlocks on doors

Cavity overheat sensor

Automatic lock-out on invalid time setting

Magnetron overheat sensors

## TECHNICAL SPECIFICATIONS

Magnetrons	One
Safety interlocks	Three
Distribution system	Rotating Passive Antenna x2
Timer	Up to 9minutes 59seconds Up to 3x 9min 59secs with multi-stage programmes
Timer controls	Digital touch pad control
User interface	Built-in diagnostic messages Digital LED display of cooking time Easy-to-use pre-programmed operation 10 programs

## CONSTRUCTION

Cavity: 304 Stainless Steel

Casework: 430 Stainless Steel

## INSTALLATION INFORMATION

Away from major heat sources.

Place on a flat surface that is level, strong and stable.

Allow a minimum of 50mm clearance at the rear of the oven and to either side for air to circulate freely and at least 365mm above the front of the oven to enable the door to operate freely and to be removed for cleaning.

If circuit breakers are in use, ensure Type C units are fitted.

For further information on Merrychef products and services or advice on which machine suits you best please contact the Sales Office.



Station Road West,  
Ash Vale, Aldershot  
Hampshire GU12 5XA  
United Kingdom

Tel: +44 (0)1252 371000  
Fax: +44(0)1252 371007  
E-mail: [info@merrychef.com](mailto:info@merrychef.com)

[www.merrychef.com](http://www.merrychef.com)

Datasheet Part No.

32Z3371 Issue 4

Printed in the UK ©Merrychef Ltd.

Enodis®