

Project _____
Item _____
Quantity _____
CSI Section 11400 _____
Approval _____
Date _____

Models

☒ HD2025


Standard Features

- 1/1 Gastronorm cavity for multi-portion dishes.
- 2025 Watts power output (IEC 705 Rating)
- Ergonomic digital touch pad control and easy to clean interior cavity.
- Full access to the oven cavity with the space saving removable automatic 'pop-up' door.
- Fully programmable (up to 10 programs) including multi-stage programming (up to 3 stages per program) and x 2 and x 3 multi-portion facility.
- User friendly operation.
- Energy saving stand-by mode.


Options & Accessories

Specifications

A fully commercial heavy duty, full size gastronorm microwave oven featuring the unique automatic 'pop-up' door providing maximum durability, flexibility and efficiency. Ideally suited for multi-portion regeneration or bulk cooking.

- In-built diagnostics – easy to use fault finding card.
- Vending model available.
- Menu Key option.
- Quality assured BS EN ISO 9001 accreditation.



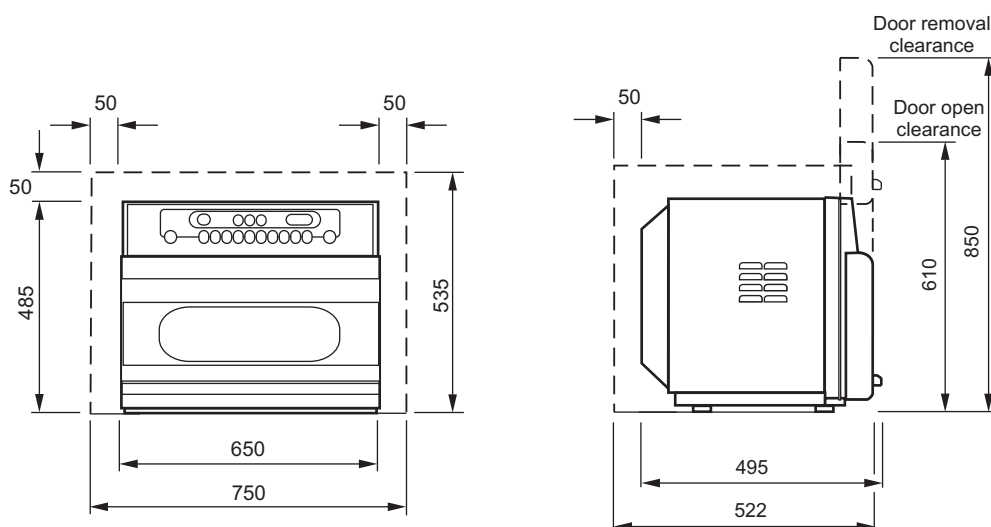

Allow a minimum of 50mm clearance to sides, top and rear to allow air to circulate freely

All dimensions in mm

DIMENSIONS

MODEL NO.	OVERALL SIZE mm			NET WEIGHT
	HEIGHT	WIDTH	DEPTH	
HD2025	485mm	650mm	495mm	50.5kg Nett 55.5kg Gross

Capacity 39.4 litres

Internal Dimensions mm (HxWxD) 200 x 540 x 365

POWER REQUIREMENTS

Power input 3.12kW maximum

ELECTRICAL SUPPLY			
Country	Voltage/Freq.	Arrangement	Connections Used
UK	230-240V 50Hz	Single Phase	1P N & E
EU	220-230V 50Hz	Single Phase	1P N & E

Moulded 13 Amp plug BS 1363A (UK only)

For oven models suitable for a 60Hz electrical supply, please contact the sales office.

MICROWAVE POWER

Output 2025 Watts (IEC705) @ 100%

Power Levels 100%, 50% & Defrost

Safety System Agency approved monitored interlock door system.

SAFETY FEATURES

Microwave safety interlocks on doors

Cavity overheat sensor

Automatic lock-out on invalid time setting

Magnetron overheat sensors

TECHNICAL SPECIFICATIONS

Magnetrons	Two
Safety interlocks	Three
Distribution system	Rotating Passive Antenna x2
Timer	Up to 9minutes 59seconds Up to 3x 9min 59secs with multi-stage programs
Timer controls	Digital touch pad control
User interface	Built-in diagnostic messages Digital LED display of cooking time Easy-to-use pre-programmed operation 10 programs

CONSTRUCTION

Cavity: 304 Stainless Steel

Casework: 430 Stainless Steel

INSTALLATION INFORMATION

Away from major heat sources.

Place on a flat surface that is level, strong and stable.

Allow a minimum of 50mm clearance at the rear of the oven and to either side for air to circulate freely and at least 365mm above the front of the oven to enable the door to operate freely and to be removed for cleaning.

If circuit breakers are in use, ensure Type C units are fitted.

For further information on Merrychef products and services or advice on which machine suits you best please contact the Sales Office.



Station Road West,
Ash Vale, Aldershot
Hampshire GU12 5XA
United Kingdom

Tel: +44 (0)1252 371000
Fax: +44(0)1252 371007
E-mail: info@merrychef.com

www.merrychef.com

Datasheet Part No.

32Z3373 Issue 4

Printed in the UK ©Merrychef Ltd.

Enodis®