

# THE QUIET SPACE SAVERS

Operation so quiet its almost silent.

Front breathing design saves floor space.

Flush top for easy under counter installation.

No plumbing or floor drains required.



Model SKR60



Model SKR48



Model SKR27

  
**SILVER KING®**  
WE'VE GOT REFRIGERATION DOWN COLD™


# FRONT BREATHING REFRIGERATOR SPECIFICATIONS

MODEL SKR27	EXTERIOR	Stainless steel, Galvanized back and bottom. Stainless steel back optional.
MODEL SKR48	INTERIOR	Stainless steel floor. Sidewalls aluminum. Coved corners and finished edges for easy cleaning.
MODEL SKR60	INSULATION	Environmentally friendly foamed-in-place polyurethane insulation for maximum strength and durability.
	DOORS	Polyurethane insulation, heavy-duty extruded aluminum frame, stainless steel exterior door panel and extra heavy-duty magnetic Thermo Rubber door gaskets combine to make the toughest, longest lasting door in the industry.
	SHELVES	Heavy gauge wire shelves are hand dipped, not sprayed, providing double-thick epoxy coating for superior durability and smooth finish. Adjustable in 1/2" increments on stainless steel pilasters.
	REFRIGERATION	CFC-free, R134a refrigerant, hermetically sealed, high efficiency, self contained refrigeration system features automatic defrost and forced air circulation. Adjustable temperature control and built-in temperature indicator standard. Automatic condensate evaporator eliminates the need for plumbing or floor drains.
	ELECTRICAL	Standard as 115 volt, 60Hz, single phase operation. 8 foot, 3-wire power cord with NEMA 5-15 plug. Also available in 230 volt, 50Hz, single phase.
	LISTINGS	cULus (U.S. and Canada), NSF International
	WARRANTY	One year materials and workmanship warranty on cabinet and refrigeration system. Five year warranty on compressor.
	ACCESSORIES	Stacking Kit, Stainless Steel Worktop, Stainless Steel Backsplash, Full Top Cutting Board, Glass Doors, Legs, Cart Kit, Cylinder Door Locks


## STORAGE

MODEL	LENGTH	DEPTH	HEIGHT	CAPACITY	SHELVES	SHELF AREA	COMPRESSOR	AMPS	WEIGHT
SKR27	27	29 3/8"	32 1/8"	6.5 cu. ft.	2	8.5 sq. ft.	1/5 hp	2.2	165 lbs
SKR48	48	29 3/8"	32 1/8"	12.2 cu. ft.	4	15.3 sq. ft.	1/4 hp	3.1	255 lbs
SKR60	60	29 3/8"	32 1/8"	15.3 cu. ft.	4	19.6 sq. ft.	1/3 hp	7.5	340 lbs


Dimensions in inches and centimeters



SKR27

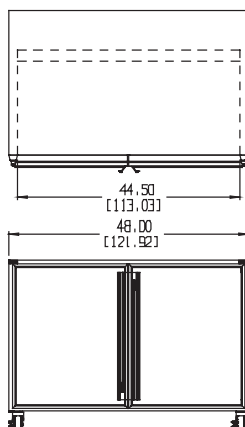


SKR48

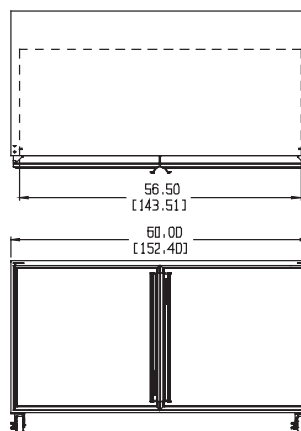

SKR60

## COMMON SIDE VIEW



**SILVER KING**  
WE'VE GOT REFRIGERATION DOWN COLD

1600 Xenium Lane North  
Minneapolis, MN 55441-3787  
Phone (763) 923-2441  
Fax (763) 553-1209  
[www.silverking.com](http://www.silverking.com)



Specifications subject  
to change without notice.

#FNSKFBRO4  
© Silver King 2009  
Printed in U.S.A.