INTRODUCING

Model SKDC48

Model SKDC48PT

THE BIG SHOW OFF

- Refrigerated products stay fresh & appealing
- Maximum capacity, fully adjustable shelves
- Energy efficient, vapor sealed glass doors
- Soft-Flo™ air circulation extends product life
- Big, glare-free, well lit case shows products at their best



Model SKDC48ST

VE GOT REFRIGERATION DOWN COLD.

REFRIGERATED DISPLAY CASE SPECIFICATIONS


MODELS	EXTERIOR	Stainless steel.			
SKDC48 SKDC48PT	INTERIOR	Stainless steel with coved corners throughout for fast, easy cleaning. Fluorescent light with easily accessible on/off switch.			
SKDC48ST	INSULATION	Environmentally friendly foamed -in-place polyurethane insulation for maximum insulation, strength and durability.			
	SHELVES	Heavy gauge wire shelves are hand dipped, not sprayed, providing double thick epoxy coating for superior durability and smooth finish. Adjustable in ¹ /2" increments on stainless steel pilasters. Two supplied.			
	GLASS DOORS	Double pane, vapor sealed, thermo insulated, positive closing doors with high impact vinyl frame to prevent thermal loss. Self-closing doors operate on easy-glide roller bearings. Easily removed for cleaning.			
	LEGS	Adjustable, 4" bullet type legs standard.			
	REFRIGERATION	CFC-free, hermetically sealed, high efficiency, self contained system features automatic defrosting with Soft-Flo™. air circulation. Evaporator coil positioned for uniform air distribution and optimum cooling. Adjustable temperature control and built-in temperature indicator. Automatic condensate evaporator eliminates drain and plumbing connections.			
	ELECTRICAL	Standard 11 <mark>5 volt, 60 Hz, single p</mark> hase operation with 8 foot, 3-wire service cord and NEMA 5-15P plug. Also available in 230 volt, 50 Hz, single phase and 230 volt, 60Hz, single phase.			
	LISTINGS	շ(Ս.S. and Canada), NSF International.			
	WARRANTY	One year parts and labor warranty on cabinet and refrigeration system. Five year warranty on compressor.			
	OPTIONS	Wall Mount Kit.			


MODEL	LENGTH	DEPTH		HEIGHT (without legs)		CAPACITY	COMPRESSOR	AMPS	WEIGHT
SKDC48	48"	23"	30"-31"	26"	13.7 sq. ft.	8.1 cv. ft.	1/4 hp	3.9	205 lbs
SKDC48PT	48"	23"	30"-31"	26"	13.7 sq. ft.	8.1 cv. ft.	1/4 hp	3.9	205 lbs
SKDC48ST	48"	23"	30"-31"	26"	13.7 sq. ft.	8.1 cu.ft.	1/4 hp	3.9	205 lbs





Specifications subject to change without notice.

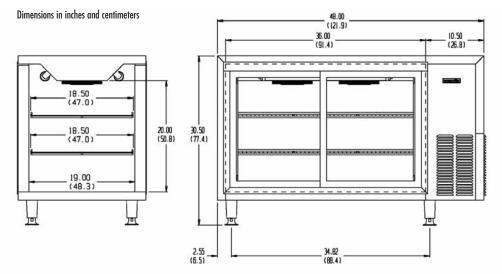





1600 Xenium Lane North Minneapolis, MN 55441-3787 Phone (763) 923-2441 Fax (763) 553-1209 www.silverking.com