Pro-Max® **TWO-SIDED GRILLS**

230V MODELS

CG10, GR10

CG14 & GR14

CG28 & GR28 SERIES

Installation and Operation Instructions

2M-Z8985 Rev.D 4/19/2010



35.6 CM X 35.6 CM Grooved Grill



35.6 CM X 71.1 CM Grooved Grill







SAFETY SYMBOL





These symbols are intended to alert the user to the presence of important operating and maintenance instructions in the manual accompanying the appliance.

RETAIN THIS MANUAL FOR FUTURE REFERENCE NOTICE

Using any part other than genuine Star factory supplied parts relieves the manufacturer of all liability.

Star reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

MAINTENANCE AND REPAIRS

Contact your local dealer for service or required maintenance. Please record the model number, serial number, voltage and purchase date in the area below and have it ready when you call to ensure a faster service.

Model No.	
Serial No.	
Voltage	
Purchase Date	

PRODUCT IDENTIFICATION

Star Manufacturing International, Inc. Two Sided Grills 230V Models:

GR10-230V- Smooth Top and Bottom Platens Aluminum, without Timer

GR10T-230V- Smooth Top and Bottom Platens Aluminum, with Timer

GR10I-230V- Smooth Top and Bottom Platens Cast Iron, without Timer

GR10IT-230V- Smooth Top and Bottom Platens Cast Iron, with Timer

CG10I-230V- Grooved Top and Bottom Platens Cast Iron, without Timer

CG10IT-230V-Grooved Top and Bottom Platens Cast Iron, with Timer

GR14-230V- Aluminum Smooth Top and Bottom Platens, without Timer

GR14T-230V- Aluminum Smooth Top and Bottom Platens, with Timer

GR14I-230V- Iron Smooth Top and Bottom Platens, without Timer

GR14IT-230V- Iron Smooth Top and Bottom Platens, with Timer

CG14-230V- Aluminum Grooved Top and Bottom Platens, without Timer

CG14T-230V- Aluminum Grooved Top and Bottom Platens, with Timer

CG14I-230V-Iron Grooved Top and Bottom Platens, without Timer

CG14IT-230V- Iron Grooved Top and Bottom Platens, with Timer

CG28I-230V Grooved Iron Platens without Timers

CG28IT-240V Grooved Iron Platens with 2 Timers

CG28IGT-240V Iron Platens, Grooved Top and Smooth Bottom without Timers

GR28I-240V Smooth Iron Platens without Timers

GR28IT-240V Smooth Iron Platens with 2 Timers

GENERAL INSTALLATION DATA



CAUTION

This equipment is designed and sold for commercial use only by personnel trained and experienced in its operation and is not sold for consumer use in and around the home nor for use directly by the general public in food service locations.

Before using your new equipment, read and understand all the instructions & labels associated with the unit prior to putting it into operation. Make sure all people associated with its use understand the units operation & safety before they use the unit.

All shipping containers should be checked for freight damage both visible and concealed. This unit has been tested and carefully packaged to insure delivery of your unit in perfect condition. If equipment is received in damaged condition, either apparent or concealed, a claim must be made with the delivering carrier.

Concealed damage or loss - if damage or loss is not apparent until after equipment is unpacked, a request for inspection of concealed damage must be made with carrier within 15 days. Be certain to retain all contents plus external and internal packaging materials for inspection. The carrier will make an inspection and will supply necessary claim forms.

VENTILATION AND CLEARANCES

The installation of any components such as a vent hood, grease extractors, and/or fire extinguishing systems, must conform to their applicable nationally recognized installation standards and/or local building codes.

ELECTRICAL CONNECTION



CAUTION

Before making any electrical connection be sure to read data plate which is located at the bottom of the unit.

ELECTRICAL GROUNDING INSTRUCTIONS

This unit is equipped with a CEE-7/VII Cord, use the proper (grounding) plug that provides proper protection against shock hazard and must be plugged directly into a properly grounded 3-prong receptacle. For your protection we recommend that a qualified electrician be consulted in regards to any electrical conserns or installations. He/she should be familiar with electrical installations and all electric codes. Proper connections and power supply are essential for efficient performance.



CAUTION

DO NOT CUT OR REMOVE THIS PLUG OR GROUNDING PRONG FROM THE PLUG.



CAUTION

CONNECT/PLUG UNIT INTO DEDICATED A.C LINE ONLY SPECIFIED ON THE DATA PLATE OF THE UNIT.

ELECTRICAL SPECIFICATIONS

Model No.	Volts	Rated Wattage	Amps	NEMA Plug
GR 10	230	1653	7.2	CEE-7/VII
GR 10I	230	1653	7.2	CEE-7/VII
CG 10I	230	1653	7.2	CEE-7/VII
GR 14	230	1653	7.2	CEE-7/VII
GR 14I	230	3306	14.2	CEE-7/VII
CG 14	230	1653	7.2	CEE-7/VII
CG 14I	230	3306	14.2	CEE-7/VII
CG 28I	230	6612	28.7	CEE-7/VII
GR 28I	230	6612	28.7	CEE-7/VII

INITIAL START UP

Level unit using the adjustable feet under the unit (approximately 1/2" adjustment).

Before using the unit for the first time, clean and heat for approximately 30 minutes. The grill may emit a small amount of smoke as the cooking surfaces reach 300-350°F (148-176°C). Do not be alarmed, as the smoke is caused by oils associated with the manufacturing process and will stop when the grill reaches 400°F (204°C). This will take approximately 30 minutes. Brush off any debris from the grilling surfaces. Allow grill to cool prior to placing it in its permanent position.

SEASONING THE COOKING SURFACES FIRST TIME SEASONING

Follow your company/corporate guidlines for seasoning cooking surfaces. or

- 1. Bring the grill to 300°F and leave it on while doing the next three steps.
- Brush the cooking surfaces with a release agent. If using an aerosol agent, first apply into a cup and then brush onto cooking surface.
- 3. Let sit for 20 minutes, and then wipe clean using a warm damp cloth.

DAILY SEASONING

The grill should not require much seasoning while in use. In most cases, brush a light coating of the baking release agent in the morning and occasionally throughtout the day will be enough to prevent any sticking. It is not necessary to spray before grilling each item.

SETTING THE TEMPERATURE

The thermostat control knob is used to set the temperature to your requirements. The maximum set point is 550°F (288°C), the minimum set point is 175°F (79°C). See Knob Settings.

SETTING THE TIMER (TIMER MODELS ONLY) (9 MIN. 59 SEC. MAX)

The timer may be factory pre-set. If changes are required follow these simple steps:

- 1. To increase time, press and hold the (UP) button. The Start/Stop button can now be used to increase the cooking time.
- 2. To decrease time, press and hold the (DOWN) button. The Start/Stop button can now be used to decrease cooking time.

KNOB SETTING

Knob Position	Approx. Temp
1-2	175°F / 79°C
3	200°F / 93°C
4	250°F / 121°C
5	300°F / 148°C
6	350°F / 176°C
7	400°F / 204°C
8	450°F / 232°C
9	500°F / 260°C
10	550°F / 287°C

ON/OFF ROCKER SWITCH (TIMER MODELS ONLY)

The switch turns the unit on and off. The switch has three positions:



With the switch in this position, both top and bottom platens will heat.



With the switch in this position, neither platen will heat.



With the switch in this position only bottom platen will heat.

DAILY OPERATION

Always allow 10-20 minutes of preheat time before loading the unit with product. Failure to allow sufficient preheat time will result in unsatisfactory cooking of the first load.

Check the power cord to insure that it is plugged into a proper outlet.

Check that the switch and thermostat control are turned on.

Set the unit's ON/OFF rocker switch to desired position.

Set the thermostat control knob to desired temperature.

OPERATING HINTS AND SAFETY

Disconnect power to the unit with the switch at the end of each day of operation.

Do not leave the unit in operation without an attendant.

Turn thermostat down to 200°F (93°C) during idle periods. It will take only a few minutes to regain operating temperature.

Use spatula to push excess grease into grease drawer after each load of food is cooked. This will reduce smoking of hot grease and carbonizing.

Do not leave the unit at high temperature when not in use or during idle periods. This will cause food particles and grease film to carbonize.

"Season" cooking surfaces with non-salted vegetable oil to reduce product sticking.

MONTHLY LUBRICATION/INSPECTION

Apply two (2) drops of non-toxic mineral or vegetable oil to counter balance shoulder rivets and plastic spacers.

Check and clean brass rollers to make sure they are rolling and not sliding on the cam surfaces of the counterbalance.

Check the bolts, screws and nuts, tighten if necessary.

CLEANING

Begin cleaning procedure by using the operating procedures within your organization, or follow the steps below:

1. If particles adhere to the cooking surface during the day, scrape them off with a spatula.

NOTE: It is best not to let food cook onto the grill, as food build-up on the grill will increase sticking and smoking. In addition, carbon may build up on the grill surface and reduce the cooking efficiency.

CARBON BUILDUP: A black matter that forms on or near the cooking surface. Generally this is releasing agents that has cooked itself to the surface. After a period of time, without carbon cleaning this material may start flaking off. When that happens, follow the "Carbon Cleaning" procedures.

At the end of the day, wipe down all surfaces with a warm, damp cloth and mild detergent, then dry.



CAUTION

DO NOT IMMERSE OR LET THE UNIT STAND IN WATER.

DO NOT HOSE DOWN THE UNIT OR THE TABLE/COUNTER IF THE UNIT IS ON THE TABLE/COUNTER.

KEEP AWAY FROM RUNNING WATER.

CLEANING CON'T



CAUTION

DO NOT USE SHARP OBJECTS TO REMOVE CARBON BUILD-UP.

BEFORE CLEANING MAKE SURE POWER IS TURNED OFF, UNIT IS UNPLUGGED AND IS NOT TOO HOT.

While holding top lid with one hand, apply only cleaners which are safe for aluminum and iron surfaces. Wipe with clean sponge or towel until unit is clean.

DO NOT SPLASH FRONT CONTROL PANEL!

DO NOT SPLASH FLEX CONDUIT CONNECTING TOP AND BOTTOM OF THE UNIT.

Remove and empty to clean grease catcher drawer as required using mild detergent and water.



WARNING

Do not use ice or cold water to clean the cooking surfaces when the unit is hot. The surfaces are cast aluminum or cast iron and may crack or deform under the shock of rapid temperature change.

CARBON CLEANING

When carbon build up occurs, use a carbon removal agent according to the instructions provided with the cleaner. When this process is complete, you must re-season the grill according to your company/ corporate guidelines, or the seasoning instructions in this manual.

OPERATION TROUBLESHOOTING

1. Unit not heating.

- **A**. Check if unit is plugged in correct receptacle.
- **B**. Check incoming power line.
- **C**. Check that the switch is in correct position.
- **D**. Check that thermostat is set to proper temperature.

2. Top platen not heating.

A. Check that the rocker switch is in correct postion.

3. Counter balance roller not rolling.

A. Clean rollers.

If unit still does not operate contact the factory or one of its representatives or a local service company for service or required maintenance.

INTERNATIONAL ONE (1) YEAR EQUIPMENT WARRANTY

All workmanship and materials in "STAR" products are warranted for a period of one year from the date shipped from the factory or one year from the date shown on the proof of purchase of the end-user when purchased through an authorized "STAR" dealer/distributor in a commercial foodservice location.

"STAR's" obligation under this warranty is limited to the replacement of the defective part(s) only without charge. This warranty is void if damage occurs from improper installation, misuse or abuse, disassembly or tampering of unit for any purpose other than repair by a qualified service agent, wrong voltage, incorrect or fluctuating voltage conditions, wrong gas, improper gas or gas conditions, operated contrary to the installation and operating instructions, operated in an application for which the unit is not suited, or if the unit is not maintained and/or cleaned in a suitable manner.

Any expense in connection with installation, or any cost of making adjustments on a unit to conform to electric or gas service at the point of installation, are not covered by this warranty.

- * The warranty period for the JetStar series six (6) ounce popcorn machines is two (2) years.
- * The warranty period for the Chrome-Max Griddles is five (5) years on the griddle surface. See detailed warranty provided with unit.
- * The warranty period for Teflon/Dura-Tec coatings is one year under normal use and reasonable care. This warranty does not apply if damage occurs to Teflon/Dura-Tec coatings from improper cleaning, maintenance, use of metallic utensils, or abrasive cleaners. This warranty does not apply to the "non-stick" properties of such materials.
- * This warranty is not valid on Conveyor Ovens unless a "start-up/check-out has been performed by a Factory Authorized Technician.

In order to make a claim under this warranty; a warranty report must be filed with Star Manufacturing International Inc. in St. Louis, Missouri, U.S.A. by the dealer/distibutor through which product was purchased. All details, including serial number and model number of the defective unit, must be included. Failure to file a claim within a 120 Day time period may result in the claim being refused.

"STAR" may forego the necessity of returning the part for inspection dependent upon the expense involved. However, "STAR" requires defective parts to be held in the claimant's possession for a period of ninety (90) days for possible inspection by a "STAR" representative or designated inspector.


The foregoing warranty is lieu of any and all other warranties, expressed or implied, and constitutes the entire warranty.


PARTS WARRANTY


Parts that are sold for out-of-warranty repair are warranted for a period of ninety days. The part only is warranted; no labor.


SERVICES NOT COVERED BY WARRANTY

- 1. Labor
- 2. Mileage and/or travel time
- 3. Installation and/or adjustment of equipment
- 4. Operation contrary to the installation and operating instructions
- 5. Cleaning of equipment
- 6. Seasoning of griddle plates
- 7. Voltage conversions/adjustments
- 8. Gas conversions
- 9. Pilot light conversion/adjustments
- 10. Thermostat calibration/adjustments
- 11. Resetting of circuit breakers or safety controls
- 12. Replacement of bulbs/lamps
- 13. Replacement of fuses
- 14. Damages due to improper installation
- 15. Damages from abuse or misuse
- 16. Damage created by acts of God, Acts of War, or Civil Disturbance

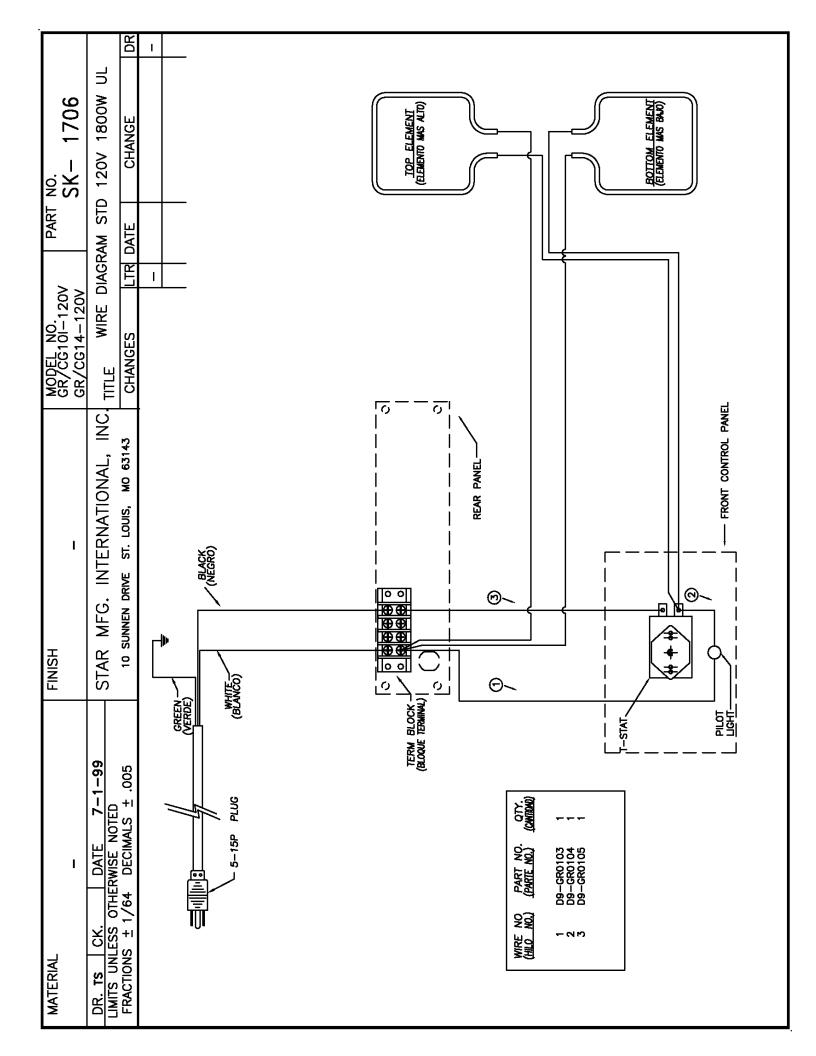

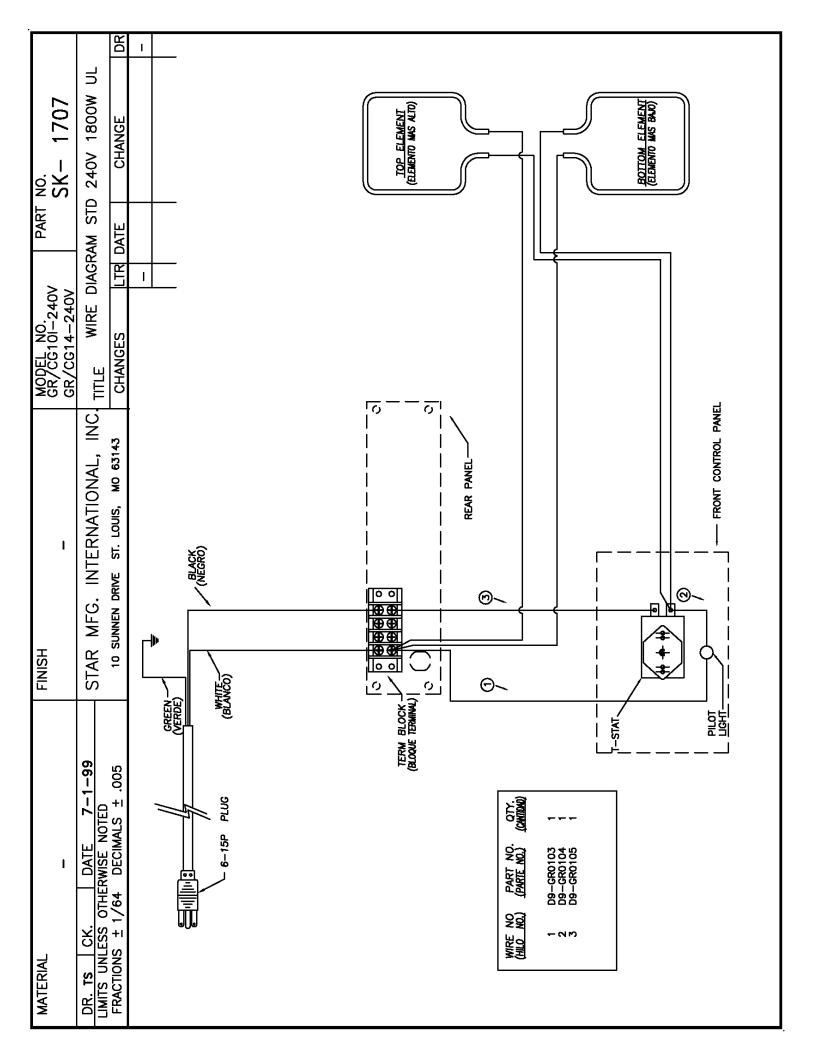

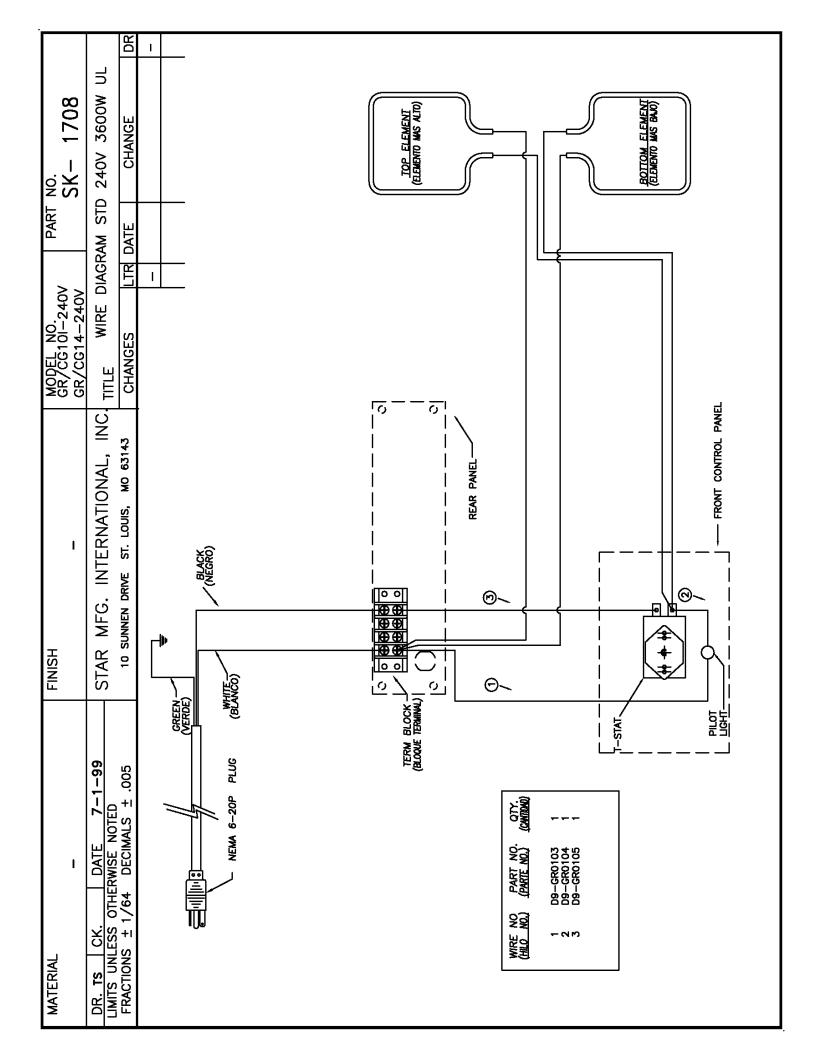

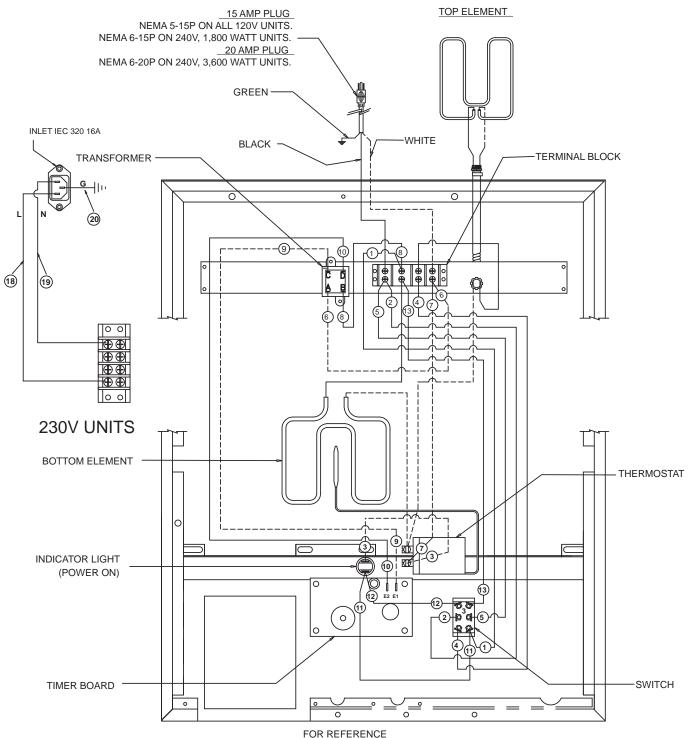


WIRING DIAGRAM IS SHOWN AS UNIT IS ASSEMBLED WITH THE BOTTOM PLATE REMOVED. ITEMS ARE IN GENERAL LOCATION BUT MAY BE RELOCATED OR SCALED FOR CLARITY.

MODEL: CG/GR, 10/14, 120V/230/240V, WITH TIMER

THIS DRAWING CONTAINS INFORMATION CONFIDENTIAL TO STAR MFG. INT'L. INC. NO REPRODUCTION OR DISCLOSURE OF ITS CONTENTS IS PERMITTED.




MATERIAL —	FINISH -	MODEL NO. GR/CG28IT-240V CG28ITGT-240V	PART NO. SK-1709
DR. T&K. DATE 7-05-99 LIMITS UNLESS OTHERWISE NOTED FRACTIONS #64 DECIMALS .005 ±	STAR MFG. INTERNATIONAL, INC. 10 SUNNEN DRIVE ST. LOUIS, MO 63143	TITLE WIRE DIAGRAM 2	WIRE DIAGRAM 240V 7200W UL W/TIMER
SWIICH (NITEGRAD) (NEGRO) (NEG	WIRE NO, PART NO, CARTINO, CAR	FRONT CONTROL PANEL	SWAND OF THE PRINCE TENNINAL) SWAND OF THE PRINCE TENNINAL) SWAND OF THE PRINCE TENNINAL) SWAND OF THE PRINCE TENNINAL)

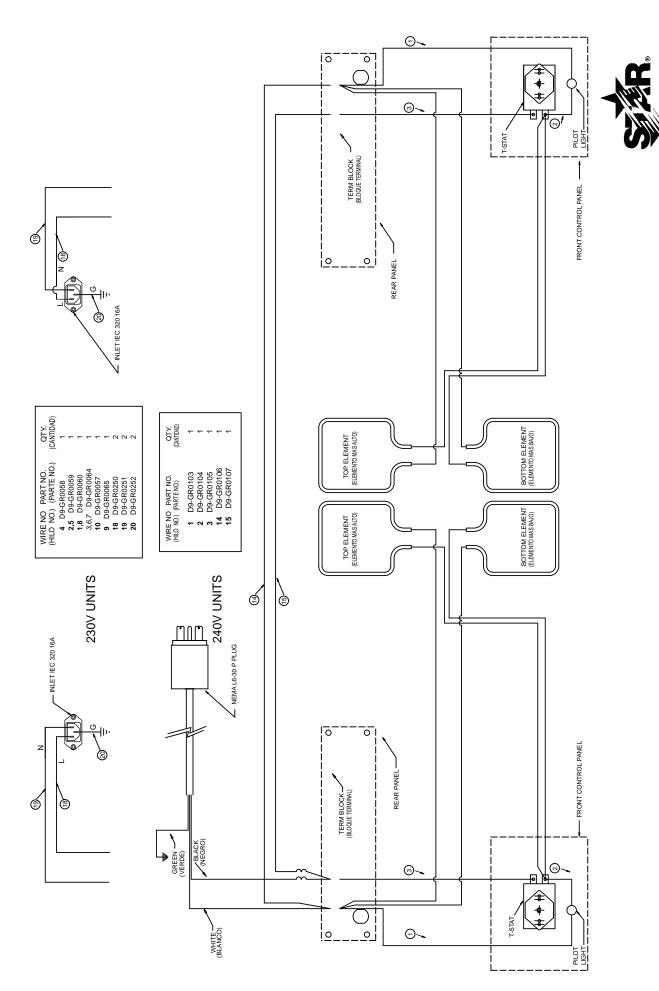

STAR MANUFACTURING INTERNATIONAL INC. SK1710 Rev B 8/09/2004

MODEL: GR-CG28I-230/240V

THIS DRAWING CONTAINS INFORMATION CONFIDENTIAL TO STAR MFG. INTL. INC. NO REPRODUCTION OR DISCLOSURE OF ITS CONTENTS IS PERMITTED.

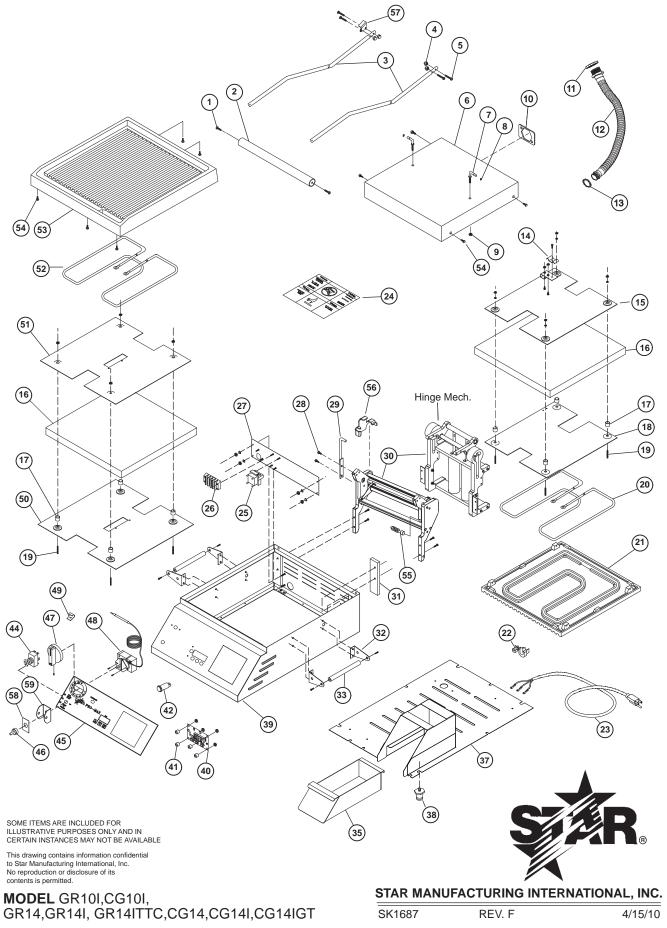

MODEL 10' TWO SIDED GRILLS

		Number		
Key	Part	Per		
Number	Number	Unit	Description	Model
1	2C-Z2992	2	SCREW, HANDLE	
2	2V-Z2990	1	HANDLE - 10"	
3	2B-Z2988	2	ARM - 10"	
4	2C-08-07-0040	4	NUT	
4	2C-08-07-0262	4	WASHER	
5	2C-Z2992	4	SCREW, ARM TO BRACKET	
6	D9-Z2038	1	HOUSING-TOP-10"	
7	2C-Z3200	2	PIN - TOP HOUSING	
8	2C-Z2855	2	RETAINER RING	
9	2C-08-07-0040	2	1/4" NUT, USE PART NUMBER 2C-Z2820	
10	24-Z3827	1	CONDUIT KEEPER PLATE	
11	2C-Z3780	2	CONDUIT RETAINER	
12	2E-Z2898	1	CONDUIT ASSY PTFE	
13	2E-Z3768	1	CONDUIT LOCKNUT	
14	D9-04-GR-0166		WIRE MOUNT	
15	D9-GR0084	1	TOP RETAINING PLATE AY/10	
16	D9-Z2908	2	INSULATION - 10"	
17	2A-Z6604	8	SPACER - INSULATED PLATE	
18 19	D9-Z2772 2C-08-07-0285	1	TOP ELEMENT/INS. PLATE/10 SCREW, ELEMENT RET. PLATE	
20	PS-Z1978	8 1	TOP ELEMENT, HEATING, 800W/120	GR10I, GR10IT, CG10I, CG10IT, GR10, GR10T
20	PS-Z2019	1 1	TOP ELEMENT, HEATING, 800W/120	GR10I, GR10IT, CG10I, CG10IT, GR10, GR10T
21	PS-GR0348	1 1	KIT, 2F-Z1928 CSTN, SM. TOP,ALUM10"	
21	PS-GR0349		KIT, 2F-Z1928 CSTN, SM. TOP, ALOM: 10 KIT, 2F-Z1932 CSTN, SM. TOP, IRON-10"	
	PS-GR0347		KIT, 2F-21932 C31N, 3M. 10F, IRON-10 KIT, 2F-Z1934 CASTING, GR. TOP, IRON-	
22	2K-Y3240	1 1	BUSHING 90 SR 17-2	GR10, GR10T, GR10IT, CG10IT, CG10IT,
	21(10240		BOOTHING SO OK 17 2	(120V MODELS),
				GR10, GR10T, GR10I, GR10IT, CG10I,CG10IT
				(240V MODELS)
23	2E-Z2770	1	CORD, POWER, 14-3, 6-15P	GR10T, GR10, GR10I, GR10IT, CG10I, CG10IT,
				(240V MODELS)
	2E-Z2935	1	CORD SET 14/3 NEMA 5-15P	GR10T, GR10, GR10I, GR10IT, CG10I, CG10IT,
				(120V MODELS)
	2E-Z4119	1	CORD, POWER, 12/3 5-20P	120VC MODELS
24	2M-Z2620	1	LABEL CAUTION, BI-LINGUAL	
25	2E-05-07-0350	1	TRANSFORMER 230V/10V 6VA	240V MODELS
	2E-05-07-0351	1	TRANSFORMER 115/10V 6VA	120V MODELS
26	2E-Z2894	1	TERMINAL BLOCK	
27	D9-GR0053	1	REAR LINER ASSY 10"/BOT	
28	2C-1512	2	SCREW - PIN ASSY	
29	2V-Z3252	1	PIN ASSY - TOP HOUSING STOP	
30	2R-Z2907	1	COUNTERBALANCE -10"-IRON	
	2R-Z3333	1	COUNTERBALANCE -10"-ALUM.	
31	D9-GR0032	2	TORQUE BOX ASSY.	
32	D9-Z3071	4	BRACKET-HANDLE	
33	2V-Z3072	2	HANDLE - SIDE	
34	D9-GR0034	1 1	GREASE CABINET ASSY.	
35	D9-GR0517	1 1	GREASE DRAWER ASSY	0001/MODELO
37	D9-GR0246	1 1	BASE BOTTOM - 10"	230V MODELS
38	2A-Z1485	4	FOOT, 1" ADJUSTABLE	
39	D9-GR0062	1 1	BODY ASSY 10" TIMER CONTROL	CG10T, CG10IT, GR10T, GR10IT
40	2J-Z1836	1	HIVIER CONTROL	CG 101, CG 1011, GK 101, GK 1011

IMPORTANT: WHEN ORDERING, SPECIFY VOLTAGE OR TYPE DESIRED INCLUDE MODEL AND SERIAL NUMBER

PAGE 1 OF 2



MODEL

10' TWO SIDED GRILLS

Key Number	Part Number	Number Per Unit	Description Model
41 42 43 44	2K-Z1971 2J-Y6689 2J-Z2329 D9-GR0051 D9-GR0109 2E-Z6863 PS-GR0223	4 1 1 1 1 1	SPACER CG10T, CG10IT, GR10T, GR10IT PILOT LIGHT, 120V GR10, GR10I, CG10I (120V MODELS) PILOT LIGHT, 240V GR10, GR10I, CG10I (240V MODELS) FACEPLATE ASSY 10" W/TIMER GR10T, GR10IT, CG10IT FACEPLATE ASSY 10" NO TIMER GR10, GR10I, GR10I, CG10I, CG10I SWITCH 3 POS CG10T, CG10IT, GR10T, GR10IT SWITCH CG10IT-120V W/SERIAL NUMBERS BELOW CGA24279 CG10IT-240V W/SERIAL NUMBERS BELOW CGA20294 GR10IT-120V W/SERIAL NUMBERS BELOW CGA29997
45 46 47 48 49 50 51 52 52 53 54 55	2M-Z6881 2M-Z3051 2I-05-07-0013 2R-Z1854 2T-6447 2A-Z3026 D9-Z2774 D9-Z2773 2N-Z1979 2N-Z2020 PS-GR0359 PS-GR0358 2C-Z5883 PS-GR134	1 1 1 1 1 1 1 1 1 1 1 8 2	OVERLAY - 10" W/TIMER OVERLAY - 10" NO TIMER RUBBER BOOT, SWITCH KNOB-CONTROL THERMOSTAT 118V-236V HALF CLIP BTM. INSULATION RET. PLATE 10" BTM ELEMENT, HEATING, 1000W/120 KIT, 2F-Z1929 CSTG, SM.BOT., ALUM10" GR10, GR10T KIT, 2F-Z1933 CSTG, GR. BOT., IRON-10" GR10, GR10T KIT, ROLLER BEARING KIT GR10, GR10I, CG10I, CG10IT, GR10, GR10T KIT, 2F-Z1935 CSTG, SM.BOT., ALUM10" GR10, GR10T KIT, 2F-Z1935 CSTG, GR. BOT., IRON-10" CG10I, CG10IT SCREW 10-24X1/2 FZA KIT, ROLLER BEARING KIT

IMPORTANT: WHEN ORDERING, SPECIFY VOLTAGE OR TYPE DESIRED INCLUDE MODEL AND SERIAL NUMBER

PAGE 2



MODEL 14' TWO SIDED GRILLS

		Number			
Key	Part	Per			
Number	Number	Unit	Description	Model	
INGITIDO	INUITIDEI	Offic	Becompain	Wiodoi	
1	2C-Z2992	2	SCREW, HANDLE		
2	2V-Z2989	1 1	HANDLE - 14"		
	2V-Z3413	1	HANDLE - 14" S.S.	GR14, GR14T	SER. # GRC00112 - 00138, GRC00778 - 00858, GRC00864 - 01256
3	2B-Z2987	2	ARM - 14"		0.100000. 0.200
	2B-Z3336	2	ARM	GR14SN	
4	2C-08-07-0040	4	NUT		
	2C-08-07-0262	4	WASHER		
5	2C-Z2992	4	SCREW, ARM TO BRACKET		
6	D9-Z2036	1	HOUSING-TOP-14"		
7	2C-Z3200	2	PIN - TOP HOUSING		
8	2C-Z2955	2	RETAINER RING		
9	2C-08-07-0040	2	1/4" NUT, USE PART NUMBER 2C-Z2820		
10	2A-Z3827	1 1	CONDUIT KEEPER PLATE		
11	2C-Z3780	2	CONDUIT RETAINER		
12	2E-Z2898	1 1	CONDUIT ASSY PTFE		
13	2E-Z3768	1 1	CONDUIT LOCKNUT		
14	D9-04-GR-0166	1 1	WIRE MOUNT		
15 16	D9-GR0079 D9-Z2888	2	TOP RETAINING PLATE AY/14 INSULATION - 14"		
17	2A-Z6604	8	SPACER - INSULATED PLATE		
18	D9-Z2075	1 1	TOP ELEMENT/INS. PLATE/14		
19	2C-08-07-0285	8	SCREW, ELEMENT RET. PLATE		
20	PS-Z1980	1 1	TOP ELEMENT, HEATING, 800W/120	CG14 CG14T GR	14, GR14T, CG14IT-120V
20	2N-Z2021		TOP ELEMENT, HEATING, 800W/240V	CG14, CG14T, GR	
	PS-Z2391		TOP ELEMENT, HEATING, 1800W/240		G14IGT, CG14ITGT, CG14I, CG14IT
21	PS-GR0350	1 1	KIT, 2F-Z7786 CSTG, SM. TOP, ALUM14"		
	PS-GR0351	1 1	KIT, 2F-Z1946 CSTG, GR. TOP, ALUM14"	•	
	PS-GR0352	1 1	KIT, 2F-Z1948 CSTG, SM. TOP, IRON-14"	GR14I, GR14IT	
	PS-GR0353	1	KIT, 2F-Z1950 CSTG, GR. TOP, IRON-14"	CG14IGT, CG14IT	GT
22	2K-3485	1	BUSHING-HEYCO #SR-9P-2		G14IGT, CG14ITGT, CG14I,
	01/11/0000	.	BU 101 III 10 FIV 10	CG14IT (240V MO	DELS)
	2K-Y2968	1	BUSHING 7W-2	CG14IT-120V	ANIADIANI)
	2K-Y6764	1 1	BUSHING	CG14IT-120VC (C	
	2K-Y3240	1	BUSHING	GR14T, (120V &12	G14T, GR14, GR14SN,
23	2E-Z2905	1 1	CORD SJTO 12/2 NEMA 6-20P		G14IGT, CG14ITGT, CG14I,
20	ZL ZZ300	'	COND COTO 12/2 NEIVIA C-201	CG14IT (240V MO	
	2E-Z2935	1 1	CORD SET 14/3 NEMA 5-15P	120V MODELS	,
	2E-Z4119	1	CORD, POWER 12/3 5-20P	120VC (CANADIA	N) MODELS
24	2M-Z2620	1 1	LABEL CAUTION, BI-LINGUAL	(,
25	2E-05-07-0350	1 1	TRANSFORMER 230V/10V 6VA	240V MODELS	
	2E-05-07-0351	1	TRANSFORMER 115/10V 6VA	120V MODELS	
26	2E-Z2894	1	TERMINAL BLOCK		
27	D9-GR0054	1	REAR LINER ASSY 14"/BOT	CG14, GR14, CG1	•
	D9-GR0080	1	REAR LINER ASSY 14"/REAR	, ,	14IGT, CG14IT, GR14IT, CG14ITGT
	D9-GR0201	1	REAR LINER ASSY.	CG14IT (120V)	
28	2C-1512	2	SCREW - PIN ASSY		
29	2V-Z3252	1 1	PIN ASSY - TOP HOUSING STOP		
30	2R-Z2896	1	COUNTERBALANCE -14"-IRON		
	2R-Z2897	1	COUNTERBALANCE -14"-ALUM.		

IMPORTANT: WHEN ORDERING, SPECIFY VOLTAGE OR TYPE DESIRED INCLUDE MODEL AND SERIAL NUMBER

PAGE 1 OF 2




MODEL 14' TWO SIDED GRILLS

		Number		
Key	Part	Per		
Number	Number	Unit	Description	Model
INUITIDE	Number	UTIIL	Description	Wodel
31	D9-GR0032	2	TORQUE BOX ASSY.	
32	D9-Z3071	4	BRACKET-HANDLE	
33	2V-Z3072	2	HANDLE - SIDE	
34	D9-GR0034	1 1	GREASE CABINET ASSY.	
35	D9-GR0517	1 1	GREASE DRAWER ASSY	
37	D9-GR0247	1 1	BASE BOTTOM - 14"	230V MODELS
38	2A-Z0314	4	FOOT, 4"	GR14I, GR14IT, CG14I, CG14IT, CG14IGT, CG14ITGT
	2A-Z1485	4	FOOT, 1" ADJUSTABLE	
39	D9-GR0061	1	BODY ASSY 14"	
	D9-GR0184	1 1	BODY ASSY	GR14SN
40	2J-Z1836	1 1	TIMER CONTROL	CG14T, CG14IT, CG14IGT, GR14T, GR14IT
41	2K-Z1971	4	SPACER	CG14T, CG14IT, CG14IGT, GR14T, GR14IT
42	2J-Y6689	1 1	PILOT LIGHT, 120V	CG14, GR14 (120V MODELS)
	2J-Z2329	1 1	PILOT LIGHT, 240V	GR14I, CG14IGT, CG14I, CG14, GR14 (240V MODELS)
43	D9-GR0108		FACEPLATE ASSY 14" NO TIMER	GR14I, CG14IGT, CG14I, CG14, GR14
.	D9-GR0178		FACEPLATE ASSY 14" 2 TIMERS	CG14-2T
	D9-GR0210	1 1	FACEPLATE ASSY 14" w/TIMER	GR14IT, CG14ITGT, CG14IT, CG14T, GR14T
44	2E-Z6863	1 1	SWITCH 3 POS	CG14T, CG14IT, CG14IGT, GR14T, GR14IT
	PS-GR0224	1 1		V W/SERIAL NUMBERS BELOW CGC25308
	. 0 0.10221			OV W/SERIAL NUMBERS BELOW CGC24701
				W W/SERIAL NUMBERS BELOW GRC23789
				OV W/SERIAL NUMBERS BELOW CGC24559
45	2M-Z6870	1 1	OVERLAY - 14" w/TIMER	GR14IT, CG14ITGT, CG14IT, CG14T, GR14T
	2M-Z3050	1 1	OVERLAY - 14" NO TIMER	GR14I, CG14IGT, CG14I, CG14, GR14
	2M-Z3816	1 1	OVERLAY - 14" w/2 MANUAL TIMERS	CG14-2T
46	2I-05-07-0013	i	RUBBER BOOT, SWITCH	
47	2R-Z1854	1 1	KNOB-CONTROL	
48	2T-6447	1 1	THERMOSTAT 118V-236V	
49	2A-Z3026	1 1	HALF CLIP	
50	D9-Z8082	1 1	BTM. INSULATION RET. PLT. 14"	
51	D9-Z8082	1 1	BTM ELEMENT RET. PLATE 14"	
52	2N-Z1981	1 1	BTM ELEMENT, HEATING, 1000W/120	CG14, CG14T, GR14, GR14T, CG14IT-120V
	2N-Z2022	1 1	BTM ELEMENT, HEATING, 1000W/240	CG14, CG14T, GR14, GR14T
	2N-Z2392	1 1	BTM ELEMENT, HEATING, 1800W/240V	GR14I, GR14IT, CG14IGT, CG14ITGT, CG14I, CG14IT
53	PS-GR0361	1 1	KIT, 2F-Z1945 CSTG, SM. BOT., ALUM14	
	PS-GR0362	1 1	KIT, 2F-Z1947 CSTG, GR. BOT., ALUM14	
	PS-GR0363	1 1	KIT, 2F-Z1949 CSTG, SM. BOT., IRON-14"	
	PS-GR0364	1 1	KIT, 2F-Z1951 CSTG, GR. BOT., IRON-14"	
54	2C-Z5883	8	SCREW 10-24X1/2 FZA	
55	PS-GR134	2	ROLLER BEARING KIT	
NI	2C-08-WB-0008	2	NUT-TIMER (NOT SHOWN)	CG14-2T
NI	2C-09-WB-0005	2	BEZEL (NOT SHOWN)	CG14-2T
NI	2P-09-WB-0007	2	TIMER BELL (NOT SHOWN)	CG14-2T
NI	2P-Z2911	1 1	PLUG DOUBLE D .75x.625	CG14I, GR14I, CG14IGT, CG14IT, GR14IT, CG14ITGT
NI	2R-09-WB-0006	2	KNOB-BLACK (NOT SHOWN)	CG14-2T
NI	2V-Z3027	2	CROSS SUPPORT (NOT SHOWN)	GR14I, GR14IT, CG14I, CG14IT, CG14IGT, CG14ITGT
NI	D9-Z3028	1 1	SIDE SUPPORT (NOT SHOWN)	GR14I, GR14IT, CG14I, CG14IT, CG14IGT, CG14ITGT
NI	D9-Z3029	1 1	PART SUPPORT (NOT SHOWN)	GR14I, GR14IT, CG14I, CG14IT, CG14IGT, CG14ITGT

IMPORTANT: WHEN ORDERING, SPECIFY VOLTAGE OR TYPE DESIRED INCLUDE MODEL AND SERIAL NUMBER

PAGE 2 OF 2



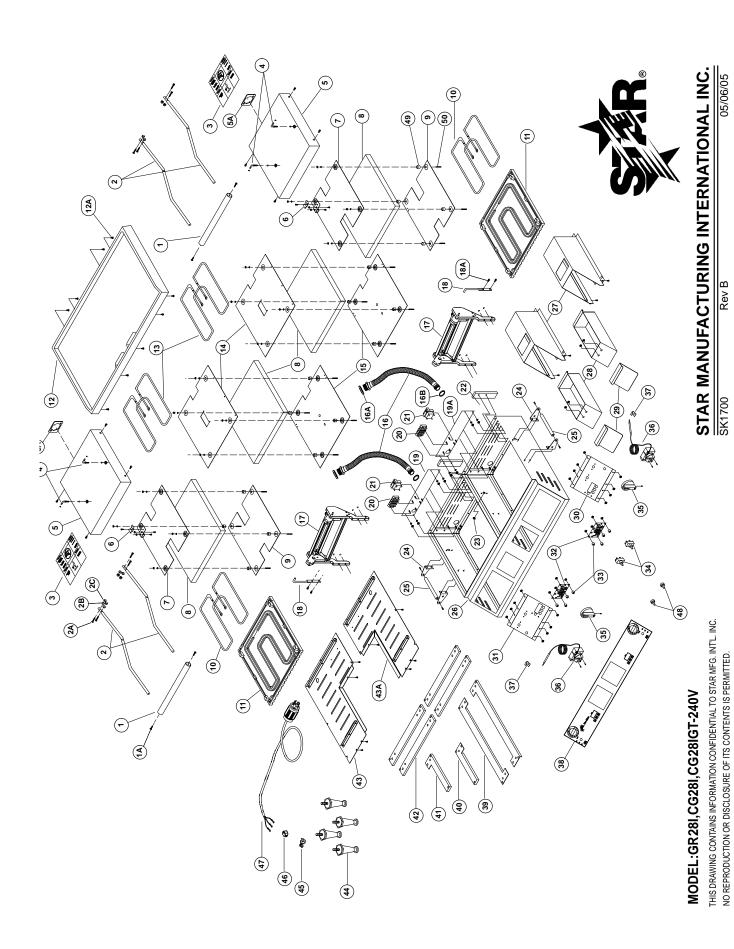

MODEL 28' TWO SIDED GRILLS

		Number		
Key	Part	Per		
Number	Number	Unit	Description	Model
1	2M-Z2989	2	HANDLE, 14"	
1A	2C-Z2992	4	BOLT 1/4" 20X1 PHP STL NP	
2	2B-Z2992 2B-Z2987	4	ARM, 14"	
2A	2C-Z2992		BOLT 1/4" 20X1 PHP STL NP	
2B	2C-22992 2C-08-07-0262	8 8	WASHER 1/4" INT STL NP	
2C	2C-08-07-0202 2C-08-07-0040	8	NUT 1/4"-20 ACHD STL NP	
3	2M-Z2620	2	LABEL, CAUTION	
4	2C-Z2820	4	PIN, TOP HOUSING	
5	D9-Z2306	2	TOP HOUSING 14"	
5A	2A-Z3827	2	CONDUIT STAMPING PLATE	
6	D9-04-GR-0166	2	WIRE MOUNT	
7	D9-GR0079	2	TOP RETAINING PLATE 14"	
8	D9-GR0079 D9-Z2888	4	INSULATION 14"	
9	D9-Z2000 D9-Z2075	2	TOP ELEMENT PLATE 14"	
10	PS-Z2391	2	TOP ELEMENT, 1800W	
11	PS-GR0353	2	KIT, 2F-Z1950 TOP CASTING - GROOVED	CG28IGT, CG28ITGT, CG28I, CG28IT
!!	PS-GR0353	1	KIT, 2F-Z1950 TOP CASTING - GROOVED	GR28ITGS
	PS-GR0352	2	KIT, 2F-Z1930 TOF CASTING - SMOOTH	GR28I, GR28IT,
	PS-GR0352 PS-GR0352	1	KIT, 2F-Z1948 TOP CASTING - SMOOTH	GR28ITGS
12	PS-GR0352 PS-GR0365	1 1	KIT, 2F-Z1946 FOF CASTING - SMOOTH	GR28I, GR28IT, CG28IGT, CG28ITGT
12	1 3-31(0303	'	KII, 21-21902 BOTTOM CASTING - SMOOTH	GR28ITGS
	PS-GR0366	1 1	KIT, 2F-Z1963 BOTTOM CASTING - GROOVED	
12 A	2c-08-07-0117	8	SCREW 10-24X3/4 FZA	60201, 602011
13	2N-Z2392	2	ELEMENT, BOTTOM 1800W	
14	D9-Z2618	2	BOTTOM ELEMENT RET. PLATE	
15	D9-Z2619	2	BOTTOM INSULATION RET. PLATE	
16	2E-Z2898	2	CONDUIT ASSY PTFE	
16A	2C-Z3780	4	CONDUIT RETAINER	
16B	2E-Z3768	4	CONDUIT LOCKNUT	
17	2R-Z2896	2	COUNTER BALANCE	
18	2V-Z3079	2	PIN ASSY - TOP HOUSING STOP	
18A	2C-1512	4	SCREW 10-24X3/8 RH	
19	D9-GR0180	1 1	REAR LINER ASSY - REAR CORD SET	240V
	D9-GR0317	1	REAR LINER ASSY - REAR CORD SET	240VC
19A	D9-GR0054	1 1	REAR LINER ASSY - BOTTOM CORD SET	
20	2E-Z2894	2	TERMINAL BLOCK	
21	2E-05-07-0350	2	TRANSFORMER 230V/10V;6VA	
22	D9-GR0032	4	TORQUE BOX ASSY	
23	2K-Y1139	1	BUSHING, HEYCO	
24	D9-Z3071	4	HANDLE BRACKET	
25	2V-Z3072	2	SIDE HANDLE	
26	D9-GR0098	1	BODY ASSY 28"	
27	D9-GR0034	2	GREASE CABINET ASSY	
28	D9-GR0517	2	GREASE DRAWER ASSY	
	·			

IMPORTANT: WHEN ORDERING, SPECIFY VOLTAGE OR TYPE DESIRED INCLUDE MODEL AND SERIAL NUMBER

PAGE 1 OF 2



MODEL 28' TWO SIDED GRILLS

		Number		
Key	Part	Per		
Number		Unit	Description	Model
TTUTTE	Number	Offic	2000.15.1011	Model
30	D9-GR0114	1 1	FACE PLATE - RIGHT w/TIMER	
	D9-GR0118	1	FACE PLATE - RIGHT w/PILOT LIGHT	
31	D9-GR0099	1 1	FACE PLATE - LEFT w/TIMER	
	D9-GR0119	1 1	FACE PLATE - LEFT w/PILOT LIGHT	
32	2J-Z1836	2	TIMER CONTROL	
33	2K-Z1971	8	SPACER	
34	2E-Z6863	2	SWITCH, 3 POSITION,	CG28IT(serial no. less than CGB29481
				use PS-GR0225)
				CG28ITGT (serial no. less than CGB25137
				use PS-GR0225)
	PS-GR0225	1	SWITCH KIT	
35	2R-Z1854	2	KNOB - THERMOSTAT	
36	2T-6447	2	THERMOSTAT	
37	2A-Z3026	2	HALF CLIP	
38	2M-Z3045	1	OVERLAY w/TIMER	
	2M-Z3088	1	OVERLAY w/PILOT LIGHT	
39	D9-Z3028	2	SIDE LEG SUPPORT	
40	D9-Z3030	1	LEG SUPPORT L.H.	
41	D9-Z3029	1	LEG SUPPORT R.H.	
42	2V-Z3027	4	LEG SUPPORT - CROSS	
43	D9-Z2610	1	BASE PLATE ASSY. 14"	
43A	D9-Z2956	1	BASE PLATE ASSY. 28"	
44	2A-Z0314	4	LEG, 4" DIE CAST	
45	2K-3485	1 1	BUSHING, HEYCO	240V
46	2P-Z2911	2	PLUG, DOUBLE "D"	
47	2E-Y9251	1	CORD SET CONT EUR 16AMP	230V
48	2I-05-07-0013	2	SWITCH BOOT	
49	2A-Z6604	16	SPACER - INSULATED PLATE	
50	2C-08-07-0285	8	SCREW 10-24 X 3/4 X 3/8	
	2J-Z2329	2	PILOT LIGHT 240V (NOT SHOWN)	GR28I, CG28I, CG28IGT, GR28ITGS

IMPORTANT: WHEN ORDERING, SPECIFY VOLTAGE OR TYPE DESIRED INCLUDE MODEL AND SERIAL NUMBER

PAGE 2 OF 2



STAR INTERNATIONAL HOLDINGS INC. COMPANY

Star - Holman - Lang - Wells - Bloomfield - Toastmaster 10 Sunnen Drive, St. Louis, MO 63143 U.S.A. (800) 807-9054 (314) 781-2777 Parts & Service (800) 807-9054 www.star-mfg.com