

PROJECT	
ITEM #	
QUANTITY	DATE
APPROVAL	

SLT4

## TrimLine L-Shaped Heated Tray Make-Up Serving Counters

#### **Short Form Specifications**

**Exterior Body** is constructed of 20-gauge stainless steel. Stress points are internally reinforced.

**Exterior Top** is constructed of 16-gauge stainless steel welded, ground and polished into one integral unit. Top has square exterior corners.

**Top** has (4) electrically heated, recessed, die stamped stainless steel hot food warmers. Food warmers are fully insulated on all sides and bottom with (1" (2.54cm) of fiberglass matting and each is covered with a galvanized steel jacket. Each food warmer has (1) heating element, rated at 1000 watts for 208 volt electrical service and wired to an individually adjustable temperature control indicator light in the control panel. Food warmers are wired together to an ON/OFF switch in the control panel. Each food warmer accommodates (1) 12.75" x 20.75" x 6" deep pan (32.4cm x 52.7cm x 15.2). Pans are provided by others. NOTE: Drains are optional.

**Control Panel** is die-stamped stainless steel and is installed on the exterior at the inner corner of the "L".


**Electrical connection** is 208-230 volts, 60 Hertz, single phase. Unit has 10' (2.7m) long cord and NEMA 6-30P plug.

Unit is mounted on 6" (15.2cm) flanged stainless steel feet.

**NOTE:** Model SLT4-L has the "L" corner on the left hand side of the server; model SLT4-R has the "L" corner on the right hand side of the server.

### **Optional Accessories and Modifications**

- **Q)** \*115/208 volt, 15 amp electrical outlet with 10 amp breaker
- J) 12" (30.5cm) wide stainless steel overshelf
- E) Stainless steel fold-down work shelf
- **QQ)** Drains plumed to a common valve
  - \*Inclusion of this option will alter electrical specifications of the unit.




Model SLT4





# TrimLine L-Shaped Heated Tray Make-Up Serving Counters

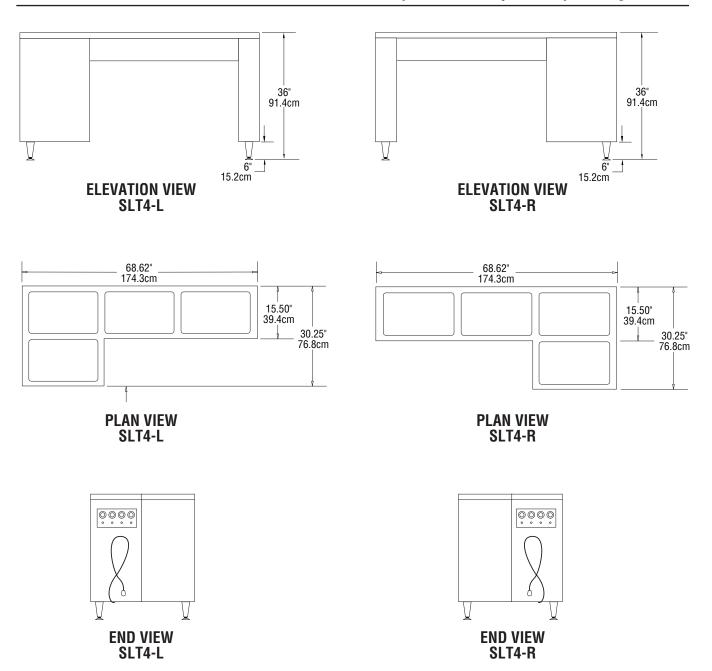

#### Mechanical Data-Standard Unit

MODEL NUMBER	PAN CAPACITY	VOLTS/HERTZ/ PHASE	AMPS @ 208V	AMPS @ 230V	NEMA PLUG	SHIP WEIGHT
SLT4-L	4	120/208-230/60/1	20.0	29.0	6-30P	300 lbs/136 kg
SLT4-R	4	120/208-230/60/1	20.0	29.0	6-30P	300 lbs/136 kg