

Project _____

Item # _____

Quantity _____



GLOBE FOOD EQUIPMENT COMPANY

30 Quart Mixers

SP30/SP30P



SP30/SP30P 30 Quart Mixers

Models

- ☐ SP30 - 30 Quart Mixer
- ☐ SP30P - 30 Quart Pizza Mixer

*Built into each mixer is the quality
of workmanship and design
synonymous with Globe.*

Standard Features

- Powerful custom built motor -
1 HP (SP30) or 1 ½ HP (SP30P)
- Three fixed speeds
- High torque transmission
- Heat-treated hardened steel alloy gears
and shafts
- Permanently lubricated transmission
- Thermal overload protection
- Rigid cast iron body
- Removable stainless steel bowl guard with
built in ingredient chute
- NSF approved enamel gray paint
- Front mounted controls
- 15 minute timer
- Industry standard #12 attachment hub
- Safety interlocked bowl guard and bowl lift
- Nonslip rubber feet
- 6 foot cord and ground plug

Standard Accessories

- 30 quart stainless steel bowl
- Flat beater (aluminum)
- Stainless steel wire whip
- Spiral dough hook (aluminum)



Optional Attachments/Accessories

- ☐ Slicer/Shredder/Grater for #12 hub
- ☐ Meat grinder for #12 hub
- ☐ 20 quart adapter kit

Standard Warranty

- Two-years parts and one-year labor

Featuring a Removable Bowl Guard



- High-quality stainless
steel removable bowl
guard
- Interlocking guard easy
to attach and remove for
easy cleaning
- Dish machine safe

Approved By: _____

Date: _____



GLOBE FOOD EQUIPMENT COMPANY

www.globeslicers.com

2153 Dryden Rd
Dayton, OH 45439
Phone: 937-299-5493
Phone: 800-347-5423
Fax: 937-299-4147



30 Quart Mixers

SP30/SP30P

Specifications

Motor: Grease packed ball bearing, air cooled. Thermal overload protection (auto reset).
SP30: 1 HP, 16 amps, 115/60/1
SP30P: 1 ½ HP, 12 amps, 220/60/1
Special voltage motors available (single phase only). Contact factory.

Finish: NSF approved enamel gray paint.

Capacity: 31.7 quart (30 liter) bowl.

Transmission: Fixed speed transmission is made of heat treated, hardened alloy, precision milled gears that operate the planetary action and provide high torque mixing power. The gears are packed in a long lasting grease, and all shafts are mounted in ball bearings.

Removable Bowl Guard:

Removable stainless steel bowl guard made of high-quality stainless steel. Interlocking guard is easy to attach and remove for easy cleaning in a sink or dishwasher. When guard is open or not properly installed, the mixer will not operate.

Safety Interlocks: The bowl guard and bowl lift lever are interlocked. The mixer will automatically shut down when the guard is opened or the bowl is lowered.

Agitator Speeds (RPMs):

Low	92
Intermediate	164
High	317

Attachment Speeds (RPMs):

Low	62
Intermediate	111
High	215

Standard Equipment: Standard equipment includes a 30 quart #304 series stainless steel bowl, aluminum spiral dough hook, stainless steel wire whip, aluminum flat beater, removable stainless steel bowl guard with built in ingredient chute, 15 minute timer, non-slip rubber feet, and #12 attachment hub. A sturdy hand lever on the body column raises and lowers the bowl as well as locking in place at the top and bottom positions.

Cord and Plug: 6 ft. flexible three wire cord and ground plug. (The SP30 has a 5-20P plug and the SP30P has a 6-20P plug.)

Dimensions:

Foot Print = 22.4" x 23.6"
(56.9 cm x 59.9 cm)

Overall Length = 26.2" (66.5 cm)

Overall Width = 22.4" (56.9 cm)

Overall Height = 48.5" (123.2 cm)

Shipping Information:

Freight Class: 85

Net Weight: 396 lbs. (180 kg)

Shipping Weight: 565 lbs. (256.3 kg)


Shipping Dimensions:

48"W x 48"D x 64"H

(121.9cm W x 121.9cm D x 162.5cm H)

Cartons are affixed to a skid (pallet).

The weight and dimensions of this skid are included above and may vary from shipment to shipment.

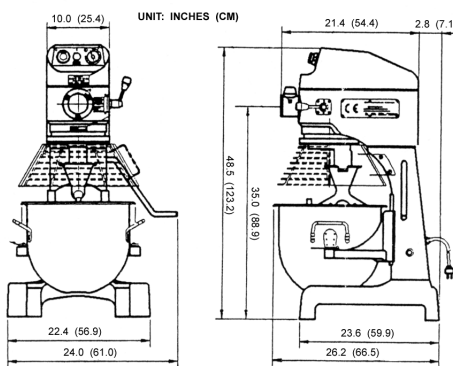

Optional Accessories:

XXACC20-30 Adapter Kit includes a 20 quart bowl, wire whip, dough hook, and flat beater to adapt 30 quart mixers to a 20 quart capacity.

Optional Attachments:

XMCA-SS Meat Grinder Assembly (Polished stainless steel cylinder, worm gear, ring, and pan. Includes knife, 3/16" plate, stainless steel pan, and pusher.)

Chopper Plate Sizes Available:

CP02-12 1/16" (2mm)

CP04-12 5/32" (4mm)

CP05-12 3/16" (5mm)

CP06-12 1/4" (6mm)

CP08-12 5/16" (8mm)

CP10-12 3/8" (10mm)

CP12-12 1/2" (12mm)

CP14-12 9/16" (14mm)

CP16-12 5/8" (16mm)

CP18-12 11/16" (18mm)

CP00-12 Stuffing Plate

XST12 1/2" stuffing tube (sheep)

XST34 3/4" stuffing tube (hog)

XVSGH 9" Slicer/Shredder/Grater Housing Only (*no plates included-must select from plates below*)

XASP Adjustable slicing plate

XPH Plate holder - *only 1 required

Shredding/Grating Plates:

XSP332* 3/32" (2.3mm)

XSP316* 3/16" (4.7mm)

XSP14* 1/4" (6.3mm)

XSP516* 5/16" (7.9mm)

XSP12* 1/2" (12.7mm)

XGP* Grating plate



GLOBE FOOD EQUIPMENT COMPANY

www.globeslicers.com

2153 Dryden Rd
Dayton, OH 45439
Phone: 937-299-5493
Phone: 800-347-5423
Fax: 937-299-4147

Specifications are subject to change without notice.