



Item # \_\_\_\_\_

Job \_\_\_\_\_

## HALF-HEIGHT HEATED TRANSPORT CABINETS\*

### TC90 FlavorHold™ Series

- **Choice of Two Models:** The TC90S holds up to nine 12" x 20" (305 x 508mm) steam table pans; the TC90B holds up to nine 18" x 26" (457 x 660mm) bun pans.
- **Mobile:** Five-inch (127mm), non-marking neoprene casters (two with brakes) and side-mounted lift handle provide ease of mobility. Both styles have a low center of gravity for safe transport or convenient under counter storage and use.
- **High Performance:** TC90S and TC90B hold hot prepared foods. A closed loop thermal brake reduces heat transfer; air vent provides moisture control. The double-walled heated cabinets are Energy Star rated.
- **Analog Thermometer:** Allows temperature monitoring at any time, even when unit is not plugged in.
- **Cleans Easily:** Smooth stainless cabinet interior and removable slide racks make cleaning easy. Control panel is also removable for cleaning or maintenance.
- **Door Opens Easily; Latches Securely:** A magnetic catch holds door shut securely; travel latch prevents opening while in transit. Convenient kick latch provides easy "hands-free" opening.



TC90S  
shown with bumper



TC90B  
(Pan not included)



**InterMetro Industries Corporation**  
North Washington Street  
Wilkes-Barre, PA 18705  
[www.metro.com](http://www.metro.com)



**Half-Height Heated Transport Cabinets — TC90 FlavorHold™ Series**

**13.28**



Job \_\_\_\_\_




# HALF-HEIGHT HEATED TRANSPORT CABINETS — TC90 FlavorHold™ Series

## Specifications

- **Electrical:** Operating range is from 120 degrees to 180 degrees Fahrenheit under normal room temperature conditions. 900 watt, 120 VAC, 8 amp, 60 cycle controlled by an adjustable thermostat with indicator light. 6-foot (1829mm) radiant heating, 3-wire lead cord. NEMA 5-15P plug. UL, CUL and NSF listed.
- **Material:** .063" (1.6mm) high-strength aluminum exterior; 18-gauge (.048) stainless interior.
- **Slide Racks:** Slide spacing is 2<sup>5</sup>/<sub>8</sub>" (66mm) to accommodate pans. TC90S is lip-loaded; TC90B is bottom-loaded. Nickel-chrome plated.
- **Casters:** Two B5DN on back — 5" (127mm) double ball bearing swivel, ball bearing axle, nickel-plated, non-marking neoprene tires, pre-lubricated, bolted through separate full-length angle-formed 1<sup>8</sup>/<sub>8</sub>" (3mm) thick aluminum plates to bottom of chassis. Two B5DNB on front — same as above, with wheel brake.

Metro Heated cabinets are for hot food holding applications only.

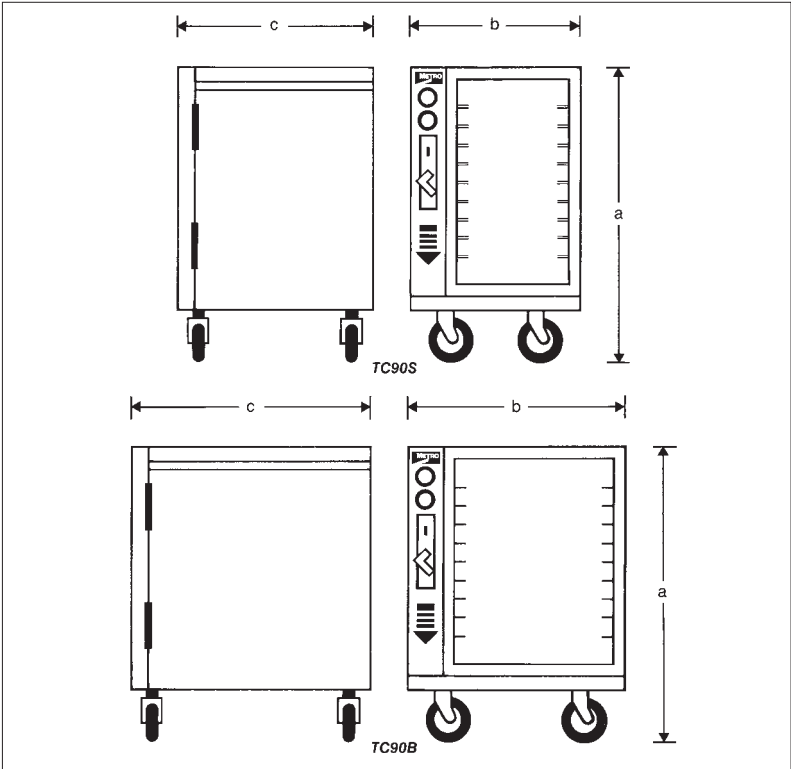

## Dimensions

Cat. No.	Style	Height (in.) (mm)		Width (in.) (mm)		Depth (in.) (mm)		Pan Capacity	Approx. Pkd. Wt. (lbs.) (kg.)	
TC90S	Without Bumper	37	940	21 <sup>1</sup> / <sub>4</sub>	540	24 <sup>3</sup> / <sub>4</sub>	629	9 — 12x20*	110	50
TC90SB	With Bumper							(305x508mm)		
TC90B	Without Bumper	37	940	27 <sup>1</sup> / <sub>4</sub>	692	30 <sup>3</sup> / <sub>4</sub>	781	9 — 18x26**	128	58
TC90BB	With Bumper							(457x660mm)		

\*TC90S — Holds steam table pans.

\*\*TC90B — Holds bun pans.

Casters — 2 swivel; 2 brake.

All Metro Catalog Sheets are available on our Web Site: [www.metro.com](http://www.metro.com)



**InterMetro Industries Corporation**  
North Washington Street, Wilkes-Barre, PA 18705  
Phone: 570-825-2741 • Fax: 570-825-2852  
For Product Information Call: 1-800-433-2232

L02-096  
Printed in U.S.A. Rev. 6/08  
Information and specifications are subject to change without notice. Please confirm at time of order.  
Copyright © 2008 InterMetro Industries Corp.