


Concepts[™] Serving Systems

Project
Item
Quantity
CSI Section 11400
Approved
Date


Models

- •DCCS-SDR Single drawer
- •DCCS-SDRW Single drawer with wing walls
- •DCCS-SDRWL Single drawer with left wing wall
- •DCCS-SDRWR Single drawer with right wing wall

- •DCCS-DDRW Dual drawer with wing walls
- •DCCS-DDRWL Dual drawer with left wing wall
- •DCCS-DDRWR Dual drawer with right wing wall



DCCS-SDRWL



DCCS-DDRWR

Options & Accessories

- Granite, Hanstone and Solid Surface top materials
- Laminated base panels
- Décor panels
- Graphics packages
- Casters
- Kickplates (units with legs only)
- 34" work height
- 30" work height
- Bottom pull out shelf (no doors)
- Locking base doors
- Tabular foot rest

Standard Features


- Heavy duty stainless steel top
- Reinforced stainless steel front and rear removable panels
- Heavy duty base support structure
- Standard on 6" legs
- 2" grommet hole in top to allow cord access for cash registers
- Stainless steel locking cash drawer(s) standard
- 120V-15A duplex (GFCI) receptacle, Nema 5-15R
 15.0A breaker
- Finished stainless steel or laminated end panels
- 36" work height
- Bottom shelf
- One year parts and labor standard warranty

980 S. Isabella Rd. Mt. Pleasant, Michigan 48858 Phone: 800-733-8948 or 989-773-7981 Fax: 800-669-0619

www.delfield.com






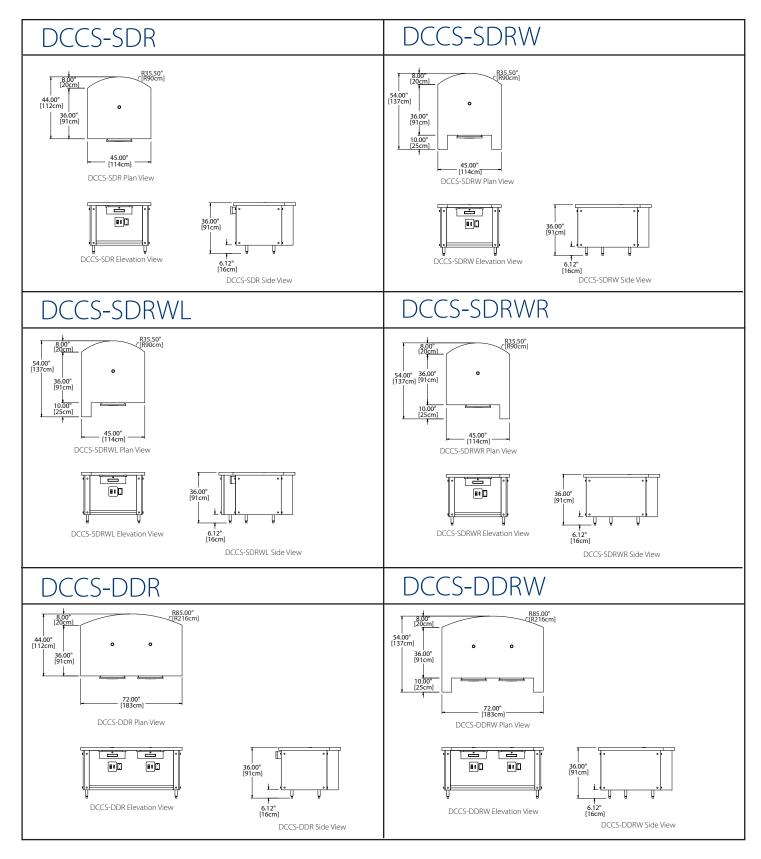





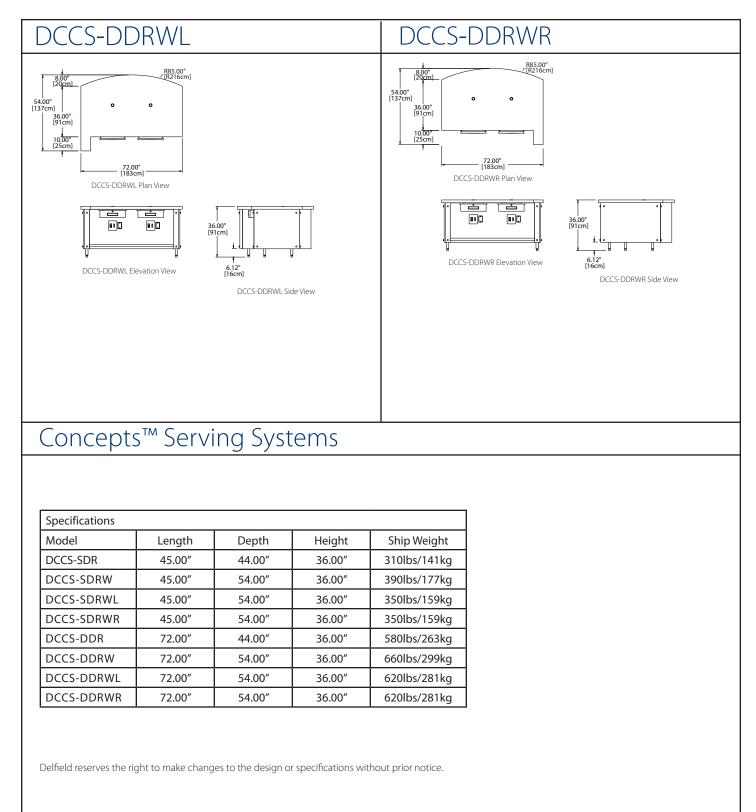





Concepts[™] Serving Systems

Radial Cashier Counter

Specifications

Exterior body is constructed of 0.75" Melamine reinforced front and rear panels with 22 gauge stainless steel skin and 1" polyethylene horizontal rib supports. Horizontal brace on rear is constructed of 18 gauge galvanized steel. The exterior ends are unfinished.

Exterior top is constructed of 14 gauge stainless steel. Horizontal top supports on front and rear are constructed with 18 gauge galvanized steel. Top end supports are 12 gauge stainless steel.

Interior base bottom is constructed of 16 gauge galvanized steel. Vertical base support braces are 14 gauge galvanized steel.

Legs: Bases mounted on 6.12" adjustable legs.

Electrical: 120V-15A duplex (GFCI) receptacle. Nema 5-15R 15.0A breaker.



Phone: 800-733-8948 or 989-773-7981 Fax: 800-669-0619 www.delfield.com Printed in the U.S.A. DSDCCSD 07/11

