



# F18PD

Self-Contained Refrigerated Dual Rail Prep Table with  
Flush Mount LiquiTec® Raised Rails

Project \_\_\_\_\_  
Item \_\_\_\_\_  
Quantity \_\_\_\_\_  
CSI Section 11400  
Approved \_\_\_\_\_  
Date \_\_\_\_\_

F18PD: Self-Contained Refrigerated Dual Rail Prep Table with Flush Mount LiquiTec® Raised Rails

## Models

- F18PD48 - 48" Dual Rail Prep Table with (4) 12"X20" pan openings
- F18PD72 - 72" Dual Rail Prep Table with (6) 12"X20" pan openings

LiquiTec®



F18PD72

## Standard Features

- Upper and lower rails are mechanically cooled utilizing LiquiTec® technology with die stamped 12"X20" openings
- Top is constructed of 16-gauge stainless steel
- Pans and adapter bars by others
- Flush mount NSF-7 certified pans
- High density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane foam throughout unit
- Dart style quick change gaskets
- Stainless steel removable hinged covers
- On/off switch is located behind the louver
- 1.50" diameter hole in louver for easy access to rail on/off switch
- 8' long electrical cord
- Environmentally friendly HFC-404A refrigerant
- One year parts and labor standard warranty

## Options & Accessories

- Stainless steel back
- Stainless steel ends
- Laminate facing (full front), end and/or back
- Tray racks
- Remote refrigeration
- Variable cutting board types and sizes
- Casters
- Cheese grates with removable catch pans
- 27" wide refrigerated drawers (2) high, holds 6" deep pans
- Door/drawer locks
- Adapter bars and pans
- 220V/50 cycle electrical system
- Additional shelf

## Specifications

**Exterior Top:** Constructed of one-piece 16-gauge stainless steel, with integral 2.12" (5.4cm) high square nosing at the front. Top has two mechanically cooled LiquiTec® refrigerated raised rails at the rear with openings to accommodate pans (provided by others). Rail interiors are 22-gauge stainless steel. Raised rail openings have 18-gauge stainless steel hinged removable lids. Unit is equipped with separate expansion valve and on/off switch for refrigerated rails. Temperature in top openings maintains 33°F (1°C) to 41°F (5°C) with pans flush mounted at 86°F (29.7°C) ambient room temperature, meeting NSF 7 requirements.

**Exterior Back, Bottom and Ends:** Unfinished galvanized steel back, bottom and exterior ends.

**Base Interior:** Stainless steel back and bottom. Base interior sides and door frames are thermoformed ABS plastic. Each interior door section has (1) 25" (63.5cm) deep removable epoxy coated wire shelf. Base is insulated with 2" (5.1cm) high density environmentally friendly, Kyoto Protocol Compliant,

Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) foamed in place polyurethane. End of base has a machine compartment with condensing units installed.





**Door(s):** 22-gauge stainless steel exterior front, with a thermoformed ABS plastic interior liner.

**Refrigeration System:** HFC-404A refrigerant. Cabinet has (1) blower coil assembly with expansion valve on 48" and 72" models. Refrigerated base maintains temperature of 36°F (2°C) to 40°F (4°C). On/off switches for rail and base are located behind the louvered panel. A 1.50" diameter hole is on the louver for easy access to rail on/off switch


**Electrical Connections:** 115 volt, 60 Hertz, single phase. Unit is wired with 3-wire, grounded, maximum 8' (2.4m) cord and plug.

**Legs:** Equipment is mounted on 6" (15cm) legs.



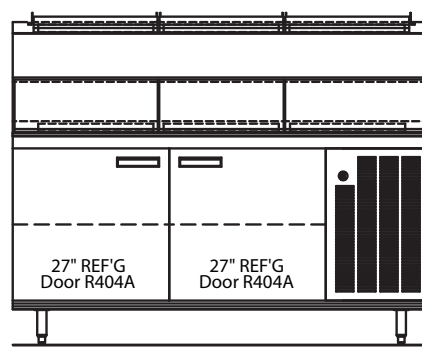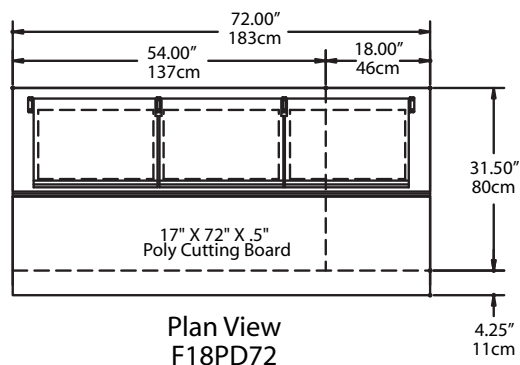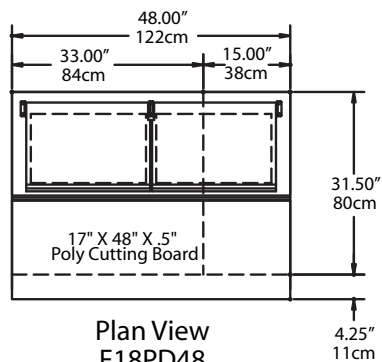

NOTE: Pans and adapter bars are not included.

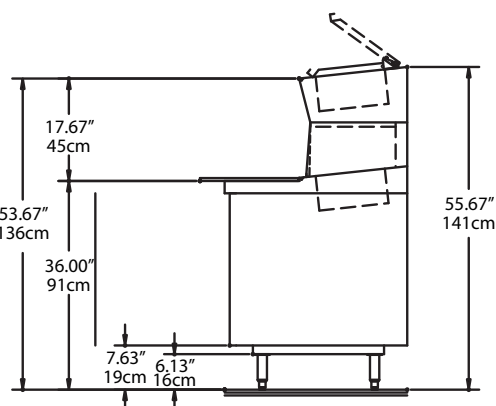

#### Specifications

Model	1/3 Pan Capacity	# Of Shelves	Storage Capacity Ft <sup>3</sup>	Shelf Area Ft <sup>2</sup>	H.P.	V/Hz/Ph	Amps	Nema Plug	Ship Weight
F18PD48	12	1	9.38	3.95	1/5, 1/3	115/60/1	10.1	5-20P	691lbs
F18PD72	18	2	16.64	7.90	1/5, 1/2	115/60/1	12.7	5-20P	873lbs

Delfield reserves the right to make changes to the design or specifications without prior notice.