

SPECIAL APPLICATION DROP-INS

WATER STATION Non-Mechanical, with Ice Chest

Item No. _____

Quantity _____

WSB-15

WSB-19



WSB-15 SHOWN



DESCRIPTION:

The WSB series water station and ice server enables you to provide ice water service to your serving counter, quickly and easily. A single spigot glass filler is mounted over a drain trough with removable anti-splash grate. A large capacity ice chest is adjacent, provided with a removable hinged lid. It's everything you need for ice water service.

The ice chest is fully insulated and the entire top is provided with a factory applied gasket so that it can be installed in the finest wood fixtures without marring the counter top. The unit is constructed of stainless steel and is provided with separate drains for both the trough and the ice chest.

FEATURES:

- Chrome plated, lever action glass filler
- Large capacity ice chest - fully insulated to hold ice longer
- Factory applied gasket - makes installation a snap and seals units to the counter top, thus eliminating seepage
- Sanitary - provided with a drain trough, with anti-splash grate.
- NSF certified







a subsidiary of Mercury Aircraft
1135 NW 159 Dr., Miami, Florida 33169
Tel: (305) 625-2451 or (800) 762-7565 • Fax: (305) 623-0475

WATER STATION

Non-Mechanical, with Ice Chest

| MODEL | CUT-OUT REQUIRED | ICE CAPACITY (lbs.) | SHIP WT. (lbs.) |
|---------------------------------|-------------------|---------------------|-----------------|
| <input type="checkbox"/> WSB-15 | 13-1/2" X 25-1/4" | 40 | 40 |
| <input type="checkbox"/> WSB-19 | 17-1/4" X 22-1/4" | 60 | 40 |

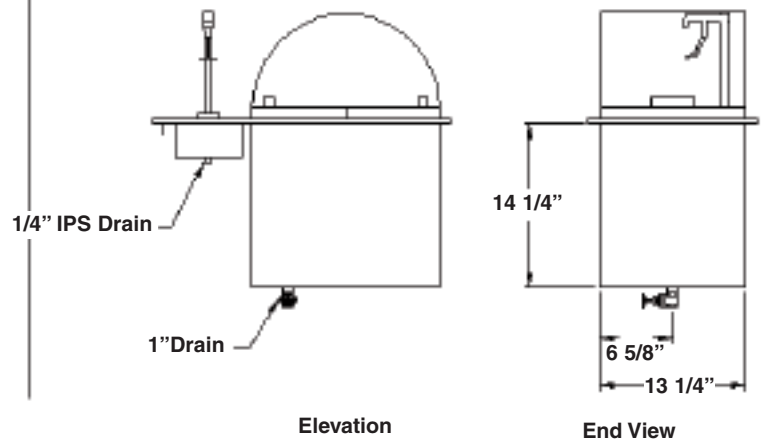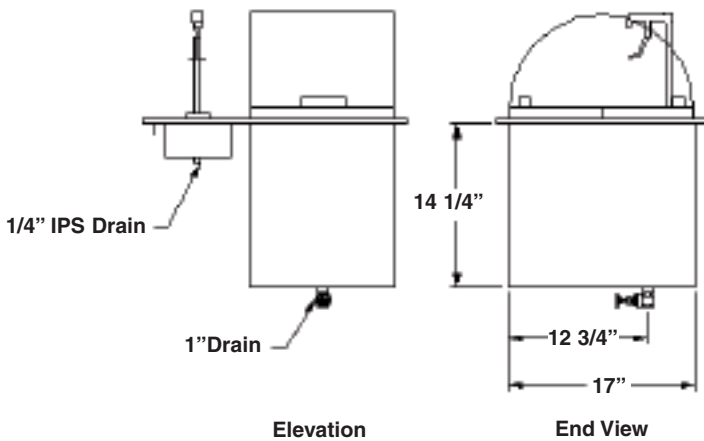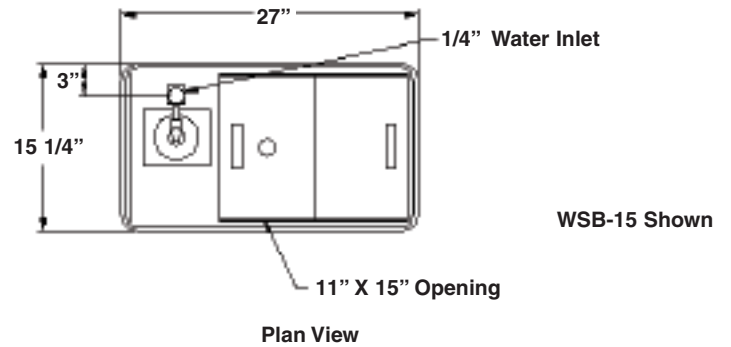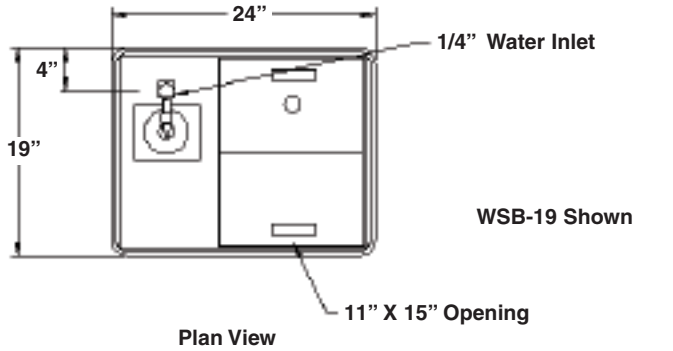

SPECIFICATIONS:

TOP: Constructed of 18 gauge, type 304 stainless steel, die stamped with a raised perimeter bead. There shall be a solid vinyl gasket under the beaded edge to form a seal to the counter top. A covered pan insert is secured to the top, and is equipped with a 1/4" IPS drain and a removable anti-splash grate. Mounted above the drain pan is a chrome plated, brass glass filler with a volume regulator and stream director.

ICE CHEST: The inner liner shall be 22 gauge, type 304 stainless steel. All corners are covered with a minimum 1/4" radius. A 1" dia. threaded drain fitting is provided.

INSULATION: The pan is fully insulated with high density polystyrene, 1" thick on all sides, 1-1/2" thick on the bottom and enclosed with a 24 gauge galvanized steel outer liner.

LID: The ice chest is provided with a double pan, insulated lid with a rubber, self-insulating hinge. The entire lid is removable.

Specifications subject to change without notice.

ACCESSORIES:

- Pitcher and glass filler



a subsidiary of Mercury Aircraft
1135 NW 159 Dr., Miami, Florida 33169
Tel: (305) 625-2451 or (800) 762-7565 • Fax: (305) 623-0475