Delfield

Concepts™ Serving Systems

Ice Cooled Serving Counter

Project _____

Item _____

Quantity _____

CSI Section 11400

Approved _____

Date _____

Models

- DC-IC2 Ice cooled serving counter, fits two standard 12"x20" pans
- DC-IC3 Ice cooled serving counter, fits three standard 12"x20" pans
- DC-IC4 Ice cooled serving counter, fits four standard 12"x20" pans
- DC-IC5 Ice cooled serving counter, fits five standard 12"x20" pans
- DC-IC6 Ice cooled serving counter, fits six standard 12"x20" pans

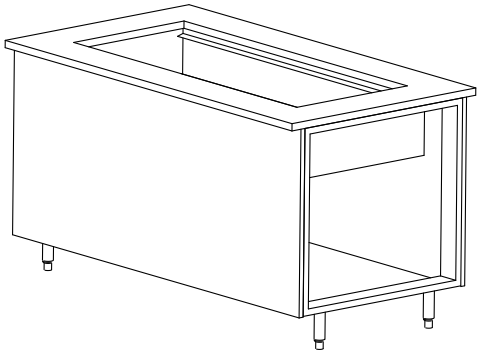

DC-IC4

Standard Features

- Integral V-stamp pan rest
- Heavy duty stainless steel top
- Reinforced stainless steel front and rear removable panels
- Heavy duty base support structure
- Standard on 6" legs
- 1" drain
- Removable perforated false bottom
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane
- 36" work height
- One year parts and labor standard warranty

Options & Accessories

- Custom lengths available per inch
- Granite, Hanstone and Solid Surface top materials
- Laminated base panels
- Finished stainless steel or laminated end panels
- Décor panels
- Graphics packages
- FlexiShield® foodshields
- Signage with overstructures, lights and heatlamps
- Refrigerated base inserts
- Heated base inserts
- Dry storage base inserts
- Mechanical access doors
- Casters (stand alone units only)
- Kickplates (units with legs only)
- Adapter plates and bars
- Tray slides
- 34" and 30" work heights

Specifications

Exterior body is constructed of 0.75" Melamine reinforced front and rear panels with 22 gauge stainless steel skin and 1" polyethylene horizontal rib supports. Horizontal brace on rear is constructed of 18 gauge galvanized steel. The exterior ends are unfinished.

Exterior top is constructed of 14 gauge stainless steel. Horizontal top supports on front and rear are constructed with 18 gauge galvanized steel. Top end supports are 12 gauge stainless steel.

Interior base bottom is constructed of 16 gauge galvanized steel. Vertical base support braces are 14 gauge galvanized steel.

Insulated ice pan is 9" (23cm) deep and constructed of 22-gauge stainless steel. A removable, perforated false bottom 1" (2.5cm) high, constructed of stainless steel, is supplied. The ice pan is separated from the exterior top by a thermal break and fully insulated with foam in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane insulation. Ice pan is equipped with a (1" (2.5cm) I.P.S. drain plumbed to drain valve located toward the operator side bottom inside unit base.

Legs: Bases mounted on 6.12" adjustable legs.

NSF®

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0619

www.delfield.com

Manitowoc

Concepts™ Serving Systems: Ice Cooled Serving Counter

Delfield

Concepts™ Serving Systems

Ice Cooled Serving Counter



DC-IC2 Plan View



DC-IC3 Plan View

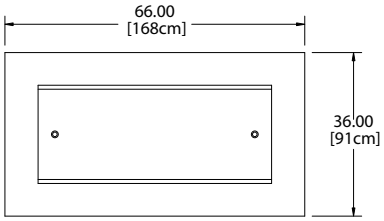

DC-IC4 Plan View



DC-IC2 Elevation View



DC-IC3 Elevation View



DC-IC4 Elevation View

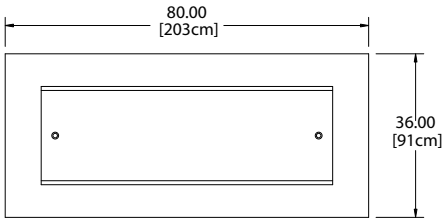

DC-IC5 Plan View

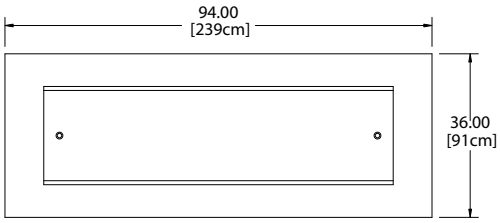

DC-IC6 Plan View

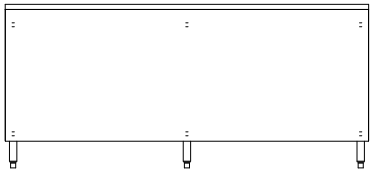

DC-IC5 Elevation View

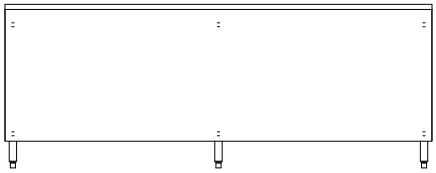

DC-IC6 Elevation View



All Models Right Side View

Specifications					
Model	Length	Depth	Height	# of 12"x20" Pans Held	Ship Weight
DC-IC2	38.00"	36.00"	36.00"	2	209lbs/95kg
DC-IC3	52.00"	36.00"	36.00"	3	286lbs/130kg
DC-IC4	66.00"	36.00"	36.00"	4	363lbs/165kg
DC-IC5	80.00"	36.00"	36.00"	5	440lbs/200kg
DC-IC6	94.00"	36.00"	36.00"	6	517lbs/235kg

Delfield reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0619
www.delfield.com

Printed in the U.S.A.
DSDCIC
03/10

Manitowoc