


Concepts™ Serving Systems

Curved Utility Counter

Project
Item
Quantity
CSI Section 11400
Approved
Date

Models

- DCBU-48R 48" long curved utility counter
- DCBU-72R 72" long curved utility counter
- DCBU-96R 96" long curved utility counter
- DCBU-120R 120" long curved utility counter



Standard Features

- · Heavy duty stainless steel top
- Reinforced stainless steel front and rear removable panels
- · Heavy duty base support structure
- Standard on 6" legs
- 36" work height
- One year parts and labor standard warranty

Options & Accessories

- Granite, Hanstone and Solid Surface top materials
- Laminated base panels
- Finished stainless steel or laminated end panels
- Décor panels
- Graphics packages
- FlexiShield® foodshields
- Signage with overstructures, lights and heatlamps
- Plate shelf
- Mechanical access doors
- Drop-ins
- Casters (stand alone units only)
- Kickplates (units with legs only)
- Trayslides
- 34" and 30" work heights

Specifications

Exterior body is constructed of 0.75" Melamine reinforced front and rear panels with 22 gauge stainless steel skin and 1" polyethylene horizontal rib supports. Horizontal brace on rear is constructed of 18 gauge galvanized steel. The exterior ends are unfinished.

Exterior top is constructed of 14 gauge stainless steel. Horizontal top supports on front and rear are constructed with 18 gauge galvanized steel. Top end supports are 12 gauge stainless steel.

Interior base bottom is constructed of 16 gauge galvanized steel. Vertical base support braces are 14 gauge galvanized steel.

Legs: Bases mounted on 6.12" adjustable legs.
















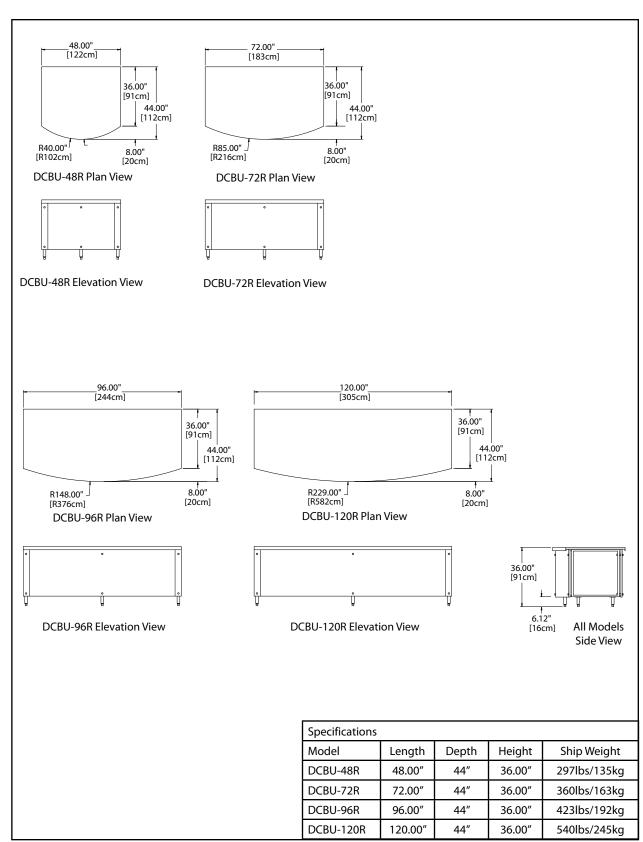

Delfield reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd. Mt. Pleasant, Michigan 48858 Phone: 800-733-8948 or 989-773-7981 Fax: 800-669-0619 www.delfield.com Printed in the U.S.A. DSDCBUR 01/11

