




Project:		AIA#
Item #: _	Qty:	SIS#
Model #:		

Shallow-Well Slide Top Coolers



Standard Features

- Meets 2008 energy efficiency standards
- · Self-contained refrigeration
- · Automatic defrost cycle
- Radius interior corners for easy cleaning
- Perfect exterior dimensions: 24" front to back and 24" or 36" left to right
- CFC free foamed-in-place insulation
- Two interior options: galvanized steel walls and stainless steel floor or all stainless steel
- Three exterior options: black vinyl-clad steel, stainless steel front & sides, or all stainless steel
- Six foot grounded cord & plug included (exits left rear)
- 3-3/4" casters or 6" legs are available
- Automatic condensate evaporator no drain connection required
- · One-piece integral top design
- Door lock

Specifications

Electrical

- 120V, 1 phase, 60 Hz, 3.7 full load amps
- Dedicated 15 amp circuit is recommended
- Includes a 6-foot grounded cord & plug which exists the left rear of the refrigeration compartment

Refrigeration

- 1/8 HP, R134a refrigerant
- Operating range: 30°F to 40°F
- Fin & tube evaporator with forced air circulation *Plumbing*
- Automatic condensate evaporator. No drain connection required

Partitions

- ST24 includes one vertical wire partition
- ST36 includes two vertical wire partitions

Capacity

- 24" model = 116 long neck bottles (4.83 cases)
- 36" model = 174 long neck bottles (7.25 cases)

Legs

- 1-5/8" diameter
- · Stainless steel bullet feet

Materials


- 20 gauge stainless steel parts include: top, door, interior floor, back*, front*, and sides* (*if all stainless finish is specified)
- 20 gauge black vinyl-clad steel parts include: front and sides (if black vinyl-clad steel body finish is specified)
- 22 gauge stainless steel parts include: interior walls (if stainless interior is specified)
- 22 gauge galvanized steel parts include: interior walls (if galvanized steel interior is specified) and back
- 16 gauge stainless steel parts include: legs*
 (* if specified)
- 16 gauge galvanized steel parts include: base


Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website.

Dimensional Information

Model	Α	В	No. of Doors
ST24	24"	20"	1
ST36	36"	32"	1

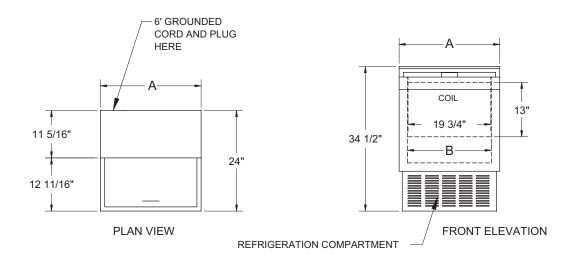

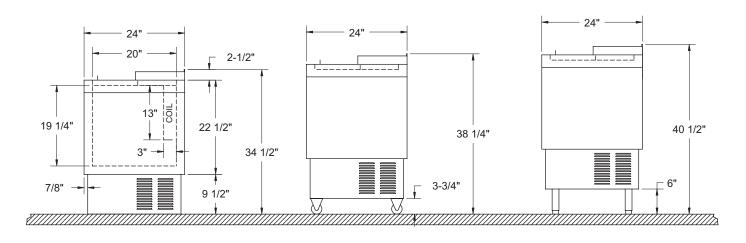

Standard Base

Optional Casters

Optional 6" Legs

TYPICAL END VIEWS

